



ALBERT GATE

ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2219

GENERAL NOTES


- THIS LUMINAIRE IS SUITED FOR DAMP LOCATIONS.
- THIS LUMINAIRE IS UL LISTED. WHEN INSTALLING LUMINAIRE, CONFORM TO ALL APPLICABLE LOCAL ELECTRICAL CODES, ORDINANCES, AND THE NATIONAL ELECTRICAL CODE (NEC).
- FOR YOUR SAFETY AND PROPER OPERATION OF LUMINAIRE, READ AND UNDERSTAND ALL INSTRUCTIONS COMPLETELY BEFORE COMMENCING INSTALLATION OF THIS LUMINAIRE.
- CAREFULLY UNPACK THE LUMINAIRE AND INSPECT FOR DAMAGE.
- THIS PRODUCT IS RATED FOR THREE 60W MAX, TYPE B BULBS.
- SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

CAUTION

THIS PRODUCT SHOULD BE INSTALLED ONLY BY A LICENSED ELECTRICIAN. PLEASE WEAR GLOVES TO PROTECT THE FINISH OF THE FIXTURE

WARNING

THE ELECTRICITY MUST BE TURNED OFF AT THE MAIN FUSE BOX BEFORE INSTALLING THIS LUMINAIRE. TURNING POWER OFF USING THE LIGHT SWITCH MAY NOT BE SUFFICIENT TO PREVENT ELECTRICAL SHOCK.

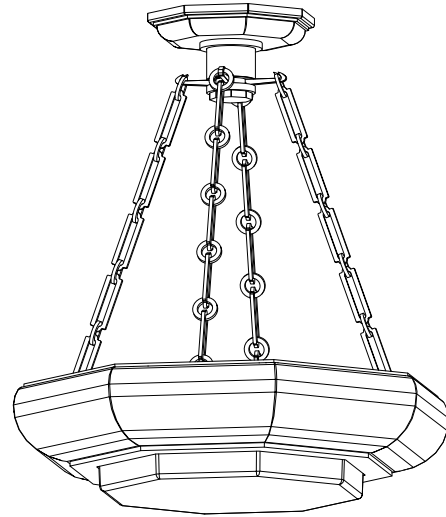

COMPONENTS PROVIDED FOR INSTALLATION

FIXTURE BODY	CROSSBAR ASSEMBLY	WIRING HARNESS	CANOPY ASSEMBLY	CANOPY CAP
WIRE NUTS (2X)	BULBS (3X)	WELDED CHAIN	GLASS	



ALBERT GATE

ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2219


MOUNTING INSTRUCTIONS – 2 PERSON INSTALL

STEP 1

SHUT OFF MAIN ELECTRICAL SUPPLY TO JUNCTION BOX FROM FUSE BOX/CIRCUIT BREAKER. TURNING POWER OFF AT SWITCH IS NOT SUFFICIENT.

STEP 2

ATTACH MOUNTING CROSSBAR TO JUNCTION BOX.

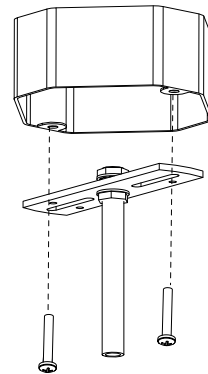


STEP 3

INSTALL WIRE HARNESS USING WIRE NUTS PROVIDED, MAKE ELECTRICAL CONNECTIONS FROM HOUSE SUPPLY TO WIRING HARNESS BY FOLLOWING ELECTRICAL CONFIGURATION TABLE BELOW. ENSURE THAT ALL ELECTRICAL CONNECTIONS ARE WRAPPED WITH UL-LISTED ELECTRICAL TAPE.


RAISE AND ATTACH CANOPY ASSEMBLY TO CROSSBAR ASSEMBLY USING CANOPY CAP.

RUN WIRES THROUGH CANOPY AND OUT HOLE BY CHAIN HOOKS.

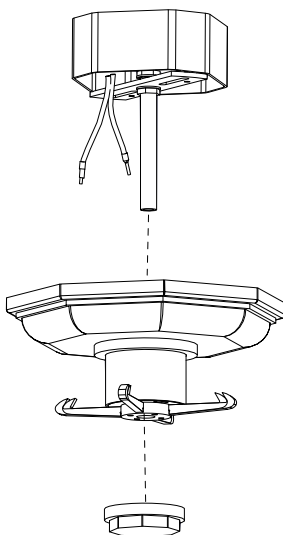

STEP 4

ATTACH CHAINS TO CANOPY ASSEMBLY.

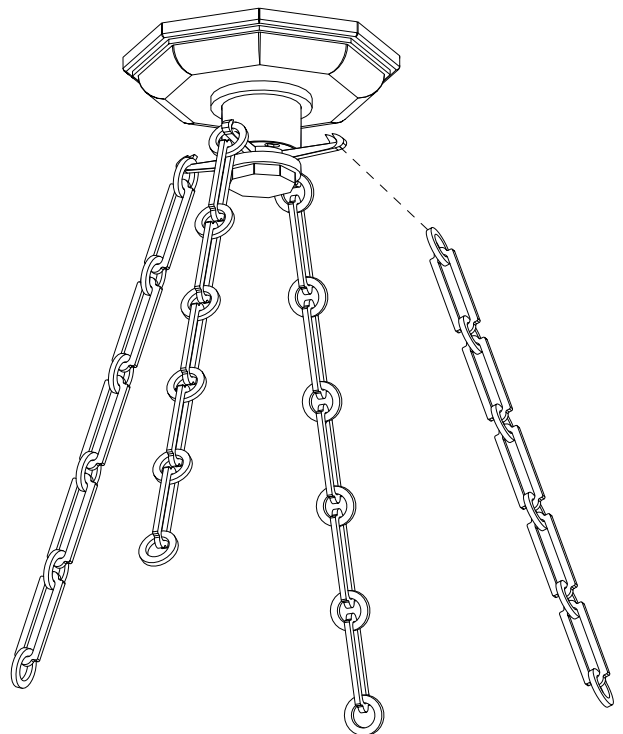




ALBERT GATE ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2219


STEP 5

REMOVE FOUR FLATHEAD SCREWS FROM FIXTURE BODY AND REMOVE ELECTRICAL.

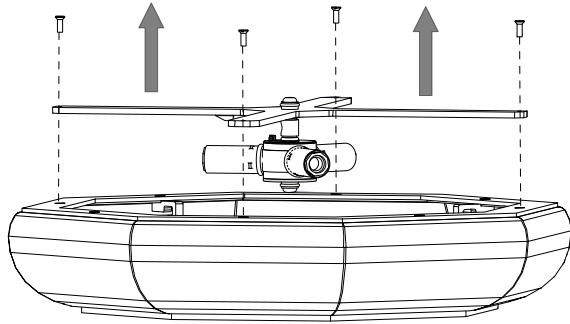


STEP 6

INSTALL GLASS.

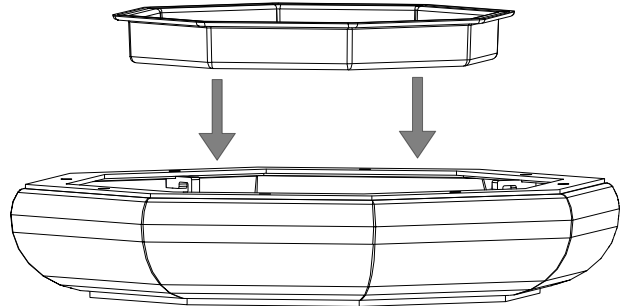


STEP 7

REATTACH ELECTRICAL.

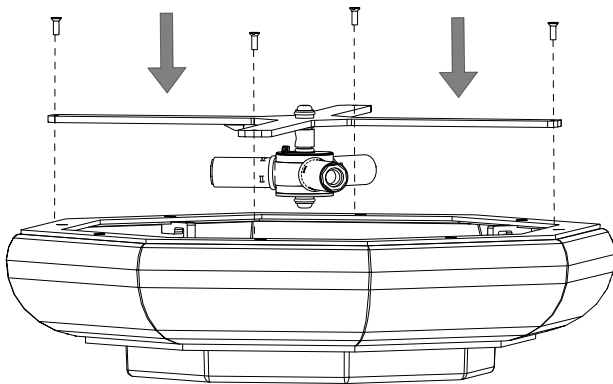

STEP 8

RAISE FIXTURE BODY TO CHAIN AND ATTACH.

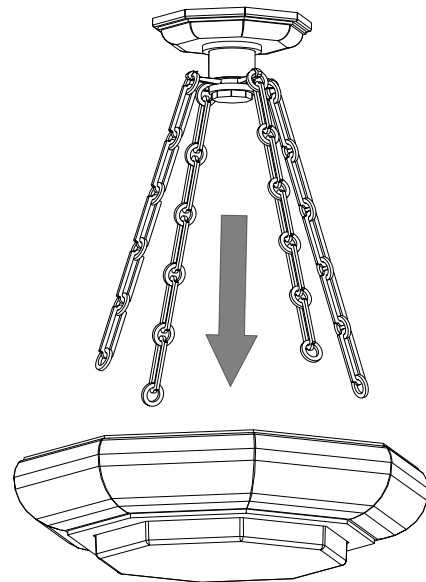



ALBERT GATE


ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2219

STEP 9

INSTALL BULBS.

RESTORE POWER TO CIRCUIT AND CONFIRM PROPER OPERATION OF FIXTURE.

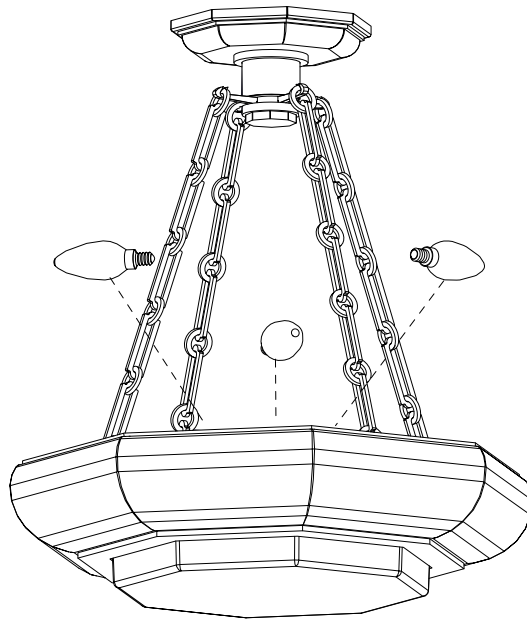

ELECTRICAL CONFIGURATION TABLE

FROM HOME	FROM LUMINAIRE
CONNECT BLACK OR RED (HOT) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE ROUND/BLACK WIRE (HOT)
CONNECT WHITE (NEUTRAL) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE RIBBED/WHITE WIRE (NEUTRAL)
CONNECT GREEN INSULATED OR BARE COPPER (GROUND -) HOUSE SUPPLY CIRCUIT WIRE TO GREEN GROUND SCREW ON CROSSBAR.	

GENERAL NOTE: USE UL LISTED WIRE NUTS FOR THE WIRING CONNECTIONS IN THIS LUMINAIRE. WRAP WIRE NUT CONNECTIONS WITH UL LISTED ELECTRICAL TAPE.

FOR QUESTIONS, PLEASE CONTACT CLIENT SERVICES AT:

843.723.8140 OR INFO@URBANELECTRIC.COM