



# COBE DOUBLE ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2171

## GENERAL NOTES

- THIS LUMINAIRE IS SUITED FOR DAMP LOCATIONS.
- THIS LUMINAIRE IS UL LISTED. WHEN INSTALLING LUMINAIRE, CONFORM TO ALL APPLICABLE LOCAL ELECTRICAL CODES, ORDINANCES, AND THE NATIONAL ELECTRICAL CODE (NEC).
- FOR YOUR SAFETY AND PROPER OPERATION OF LUMINAIRE, READ AND UNDERSTAND ALL INSTRUCTIONS COMPLETELY BEFORE COMMENCING INSTALLATION OF THIS LUMINAIRE.
- CAREFULLY UNPACK THE LUMINAIRE AND INSPECT FOR DAMAGE.
- THIS PRODUCT IS RATED FOR FOUR 10W MAX, TYPE B BULBS.
- SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.


### CAUTION

THIS PRODUCT SHOULD BE INSTALLED ONLY BY A LICENSED ELECTRICIAN. PLEASE WEAR GLOVES TO PROTECT THE FINISH OF THE FIXTURE.

THIS FIXTURE WEIGHS APPROXIMATELY 37 LBS.

### WARNING

THE ELECTRICITY MUST BE TURNED OFF AT THE MAIN FUSE BOX BEFORE INSTALLING THIS LUMINAIRE. TURNING POWER OFF USING THE LIGHT SWITCH MAY NOT BE SUFFICIENT TO PREVENT ELECTRICAL SHOCK.

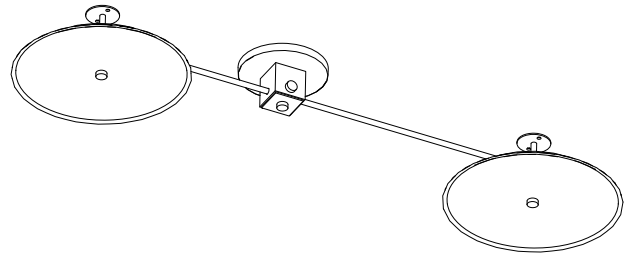






## COMPONENTS PROVIDED FOR INSTALLATION

SHADE ASSEMBLY (X2)	CENTER CLUSTER	CLUSTER CAP ASSEMBLY	FIXTURE ARMS (X2)	BULBS (X4)
SHADE TOP ASSEMBLY (X2)	MOUNTING PLATE	DIFFUSER (X2)	SHADE FASTENER (X4)	FLATHEAD WOOD SCREW (X4)



## COBE DOUBLE ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2171

HEX WRENCH	WIRE HARNESS	JUNCTION BOX SCREWS (X2)	WIRE NUTS (X2)	DRYWALL ANCHORS (X2)
				


### MOUNTING INSTRUCTIONS – TWO PERSON INSTALL- 60 MINUTES

#### STEP 1

SHUT OFF THE MAIN ELECTRICAL SUPPLY TO THE JUNCTION BOX FROM THE FUSE BOX/CIRCUIT BREAKER. TURNING POWER OFF AT THE SWITCH IS NOT SUFFICIENT.

#### STEP 2


REMOVE FOUR LOCKNUTS FROM MOUNTING PLATE AND SET ASIDE FOR LATER USE.

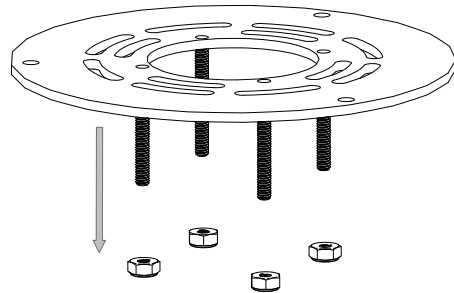

#### STEP 3

ATTACH MOUNTING PLATE TO JUNCTION BOX, USING JUNCTION BOX SCREWS.

CONFIRM ORIENTATION OF FIXTURE BEFORE INSTALL.

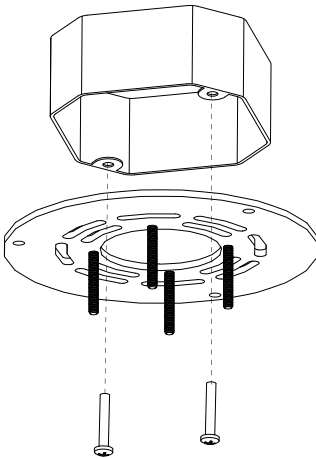

#### STEP 4

INSTALL PROVIDED WIRE HARNESS

USING THE WIRE NUTS PROVIDED, MAKE ELECTRICAL CONNECTIONS BY FOLLOWING THE ELECTRICAL CONFIGURATION TABLE BELOW. ENSURE THAT ALL ELECTRICAL CONNECTIONS ARE WRAPPED WITH UL-LISTED ELECTRICAL TAPE.

**IMPORTANT: NEVER ALLOW FIXTURE TO “HANG” FROM ELECTRICAL CONNECTIONS OR TO OTHERWISE PUT PRESSURE ON THE CONNECTIONS. THE WEIGHT OF THE FIXTURE SHOULD BE SUPPORTED BY THE DOWNROD AND CROSSBAR ASSEMBLY.**




## COBE DOUBLE ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2171

### STEP 5


INSTALL CENTER CLUSTER USING LOCKNUTS REMOVED FROM MOUNTING PLATE EARLIER.

**DO NOT OVERTIGHTEN LOCKNUTS AS IT WILL COMPRESS CANOPY. TIGHTEN UNTIL CANOPY IS FLUSH ON CEILING.**

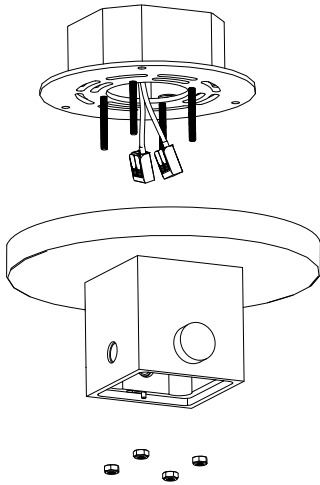

### STEP 6

INSTALL ARMS INTO CENTER CLUSTER.

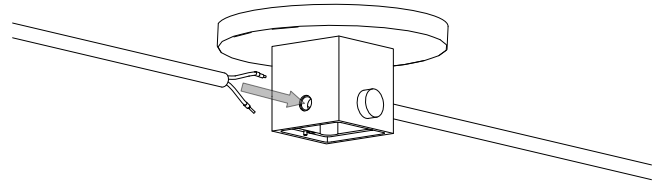

### STEP 7


USING THE SHADE TOP ASSEMBLY, RUN WIRES THROUGH BOTTOM SQUARE OF ASSEMBLY.

FIT ONTO ARM AND ATTACH SET SCREW, THIS IS SO SHADE TOP ASSEMBLY IS IN PLACE TO MARK CEILING FOR DRILLING HOLES.

REMOVE SET SCREW AND SHADE TOP ASSEMBLY TO INSTALL ANCHORS.


AFTER ANCHORS ARE INSTALLED, ATTACH ASSEMBLY TO ARM WITH SET SCREW.

ATTACH SHADE TOP ASSEMBLY TO CEILING WITH PROVIDED FLATHEAD WOOD SCREWS.

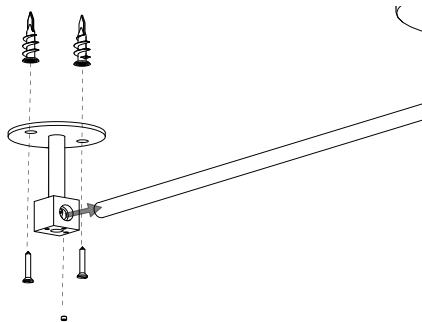

### STEP 8

REMOVE ELECTRICAL CLUSTER FROM SHADE, BY REMOVING BRASS NUTS ON CLUSTER.

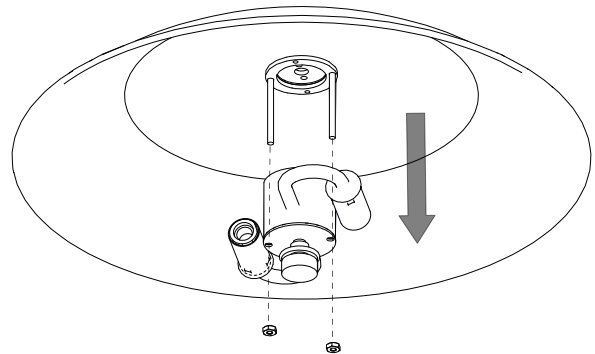



## COBE DOUBLE ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2171


### STEP 9

FEED ELECTRICAL WIRES THROUGH SHADE.

USING SHADE FASTENERS, ATTACH SHADES TO SHADE TOP ASSEMBLY.


FEED ELECTRICAL WIRES THROUGH SHADE.

USING SHADE FASTENERS, ATTACH SHADES TO SHADE TOP ASSEMBLY.

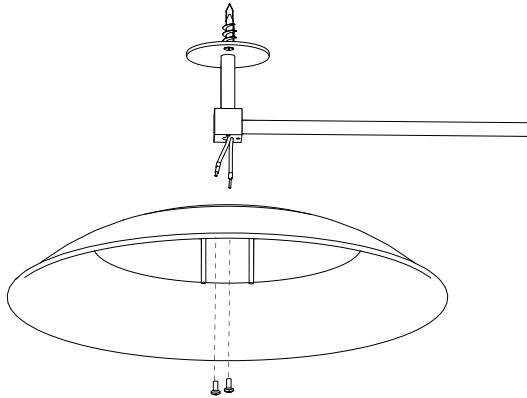

### STEP 10

MAKE ELECTRICAL CONNECTIONS IN ELECTRICAL CLUSTER AND REATTACH TO SHADE USING BRASS NUTS.

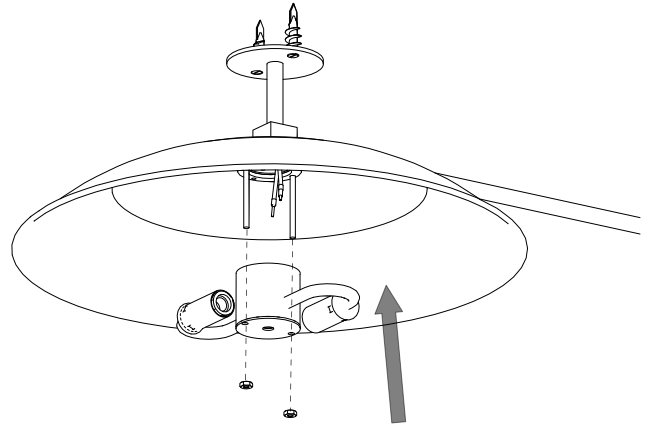


### STEP 11

AFTER SHADES ARE INSTALLED, MAKE ELECTRICAL CONNECTIONS IN CENTER CLUSTER.

ATTACH CLUSTER CAP ASSEMBLY BY RAISING INTO SLOTTED HOLES AND SLIDING FORWARD.


ATTACH BOTTOM OF ASSEMBLY AND TIGHTEN FASTENER.

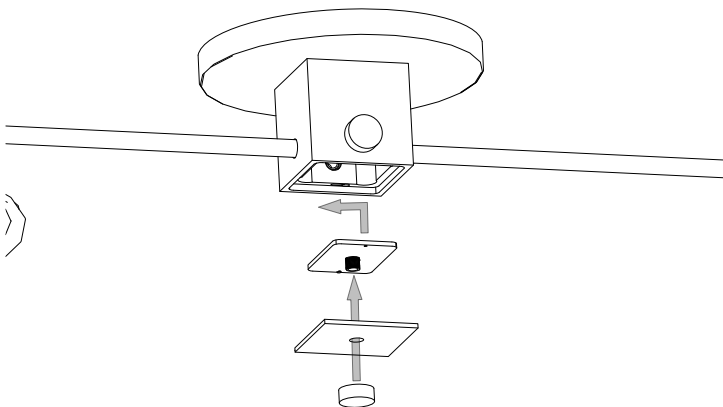

### STEP 12

INSTALL BULBS.

REMOVE FASTENER ON BOTTOM OF ELECTRICAL CLUSTER

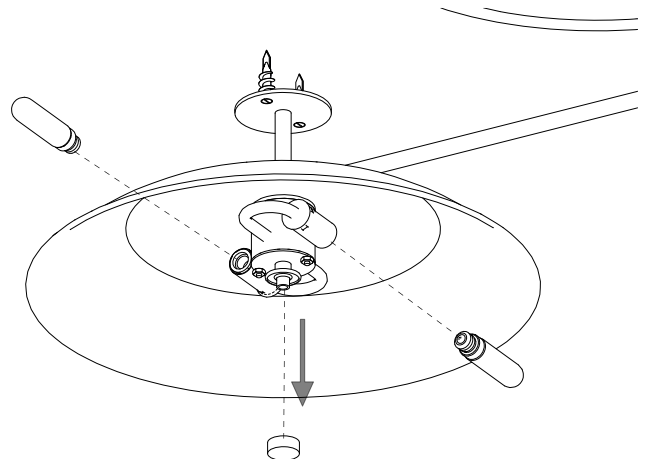




## COBE DOUBLE ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2171

### STEP 13

INSTALL DIFFUSER, SECURE WITH FASTENER FROM ELECTRICAL CLUSTER.

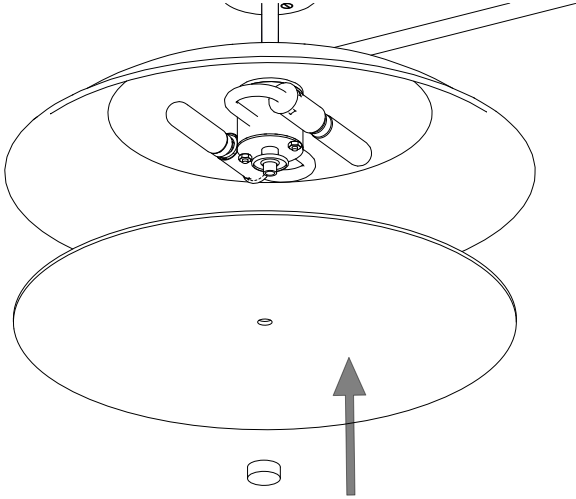

### STEP 14

RESTORE POWER TO CIRCUIT AND CONFIRM PROPER WORKING ORDER.

### ELECTRICAL CONFIGURATION TABLE

FROM HOME	FROM LUMINAIRE
CONNECT BLACK OR RED (HOT) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE ROUND/BLACK WIRE (HOT)
CONNECT WHITE (NEUTRAL) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE RIBBED/WHITE WIRE (NEUTRAL)
CONNECT GREEN INSULATED OR BARE COPPER (GROUND -) HOUSE SUPPLY CIRCUIT WIRE AND LUMINAIRE BARE STRANDED WIRE (GROUND -) TO GREEN GROUND SCREW ON CROSSBAR.	

**GENERAL NOTE:** USE UL LISTED WIRE NUTS FOR THE WIRING CONNECTIONS IN THIS LUMINAIRE. WRAP WIRE NUT CONNECTIONS WITH UL LISTED ELECTRICAL TAPE.

FOR QUESTIONS, PLEASE CONTACT CLIENT SERVICES AT: 843.723.8140 OR  
INFO@URBANELECTRICCO.COM