



FORME

ASSEMBLY AND MOUNTING INSTRUCTIONS

MA-1866

GENERAL NOTES


- THIS LUMINAIRE IS SUITED FOR DAMP LOCATIONS.
- WHEN INSTALLING LUMINAIRE, CONFORM TO ALL APPLICABLE LOCAL ELECTRICAL CODES, ORDINANCES, AND THE NATIONAL ELECTRICAL CODE (NEC).
- FOR YOUR SAFETY AND PROPER OPERATION OF LUMINAIRE, READ AND UNDERSTAND ALL INSTRUCTIONS COMPLETELY BEFORE COMMENCING INSTALLATION OF THIS LUMINAIRE.
- CAREFULLY UNPACK THE LUMINAIRE AND INSPECT FOR DAMAGE.
- THIS PRODUCT IS RATED FOR A 17W LED PANEL.
- SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

CAUTION







- THIS PRODUCT SHOULD BE INSTALLED ONLY BY A LICENSED ELECTRICIAN.
- THIS FIXTURE WEIGHS APPROXIMATELY 11 LBS.

WARNING

THE ELECTRICITY MUST BE TURNED OFF AT THE MAIN FUSE BOX BEFORE INSTALLING THIS LUMINAIRE. TURNING POWER OFF USING THE LIGHT SWITCH MAY NOT BE SUFFICIENT TO PREVENT ELECTRICAL SHOCK.

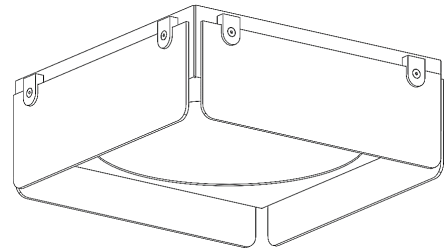

COMPONENTS PROVIDED FOR INSTALLATION

FIXTURE BODY 	MOUNTING PLATE 	SOCKET HEAD SCREW & O-RING (X8) 	ACRYLIC PANELS (X4) 
HEX WRENCH 3/32 & 5/64 	WIRE NUTS 		



FORME

ASSEMBLY AND MOUNTING INSTRUCTIONS

MA-1866


MOUNTING INSTRUCTIONS

STEP 1

SHUT OFF THE MAIN ELECTRICAL SUPPLY TO THE JUNCTION BOX FROM THE FUSE BOX/CIRCUIT BREAKER. TURNING POWER OFF AT THE SWITCH IS NOT SUFFICIENT.

STEP 2


LOOSEN TWO OF THE ACCESSIBLE SET SCREWS AND REMOVE THE MOUNTING PLATE FROM THE FIXTURE BODY.

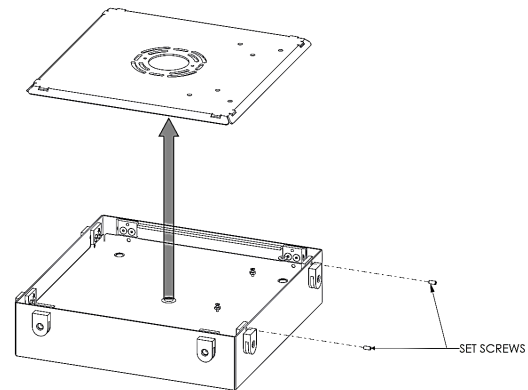

STEP 3

ATTACH THE MOUNTING PLATE TO THE JUNCTION BOX USING THE JUNCTION BOX SCREWS.


MAKE ELECTRICAL CONNECTIONS FROM THE HOUSE SUPPLY TO THE LOW VOLTAGE DRIVER USING THE ELECTRICAL CONFIGURATION TABLE PROVIDED. ENSURE THAT ALL ELECTRICAL CONNECTIONS ARE WRAPPED WITH UL-LISTED ELECTRICAL TAPE.

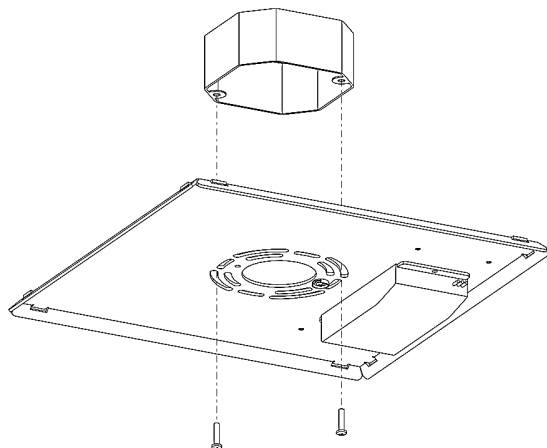

STEP 4

LIFT THE FIXTURE BODY FOR THE MOUNTING PLATE AND MAKE YOUR QUICK CONNECTS.

IMPORTANT: NEVER ALLOW FIXTURE TO "HANG" FROM ELECTRICAL CONNECTIONS OR TO OTHERWISE PUT PRESSURE ON THE CONNECTIONS.

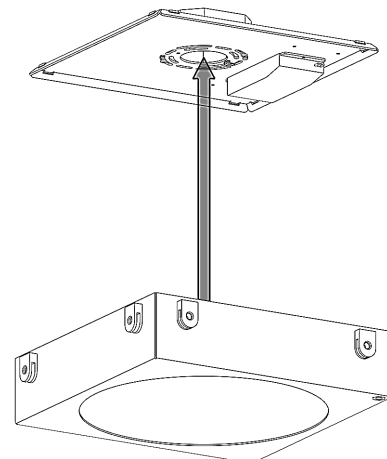




FORME ASSEMBLY AND MOUNTING INSTRUCTIONS

MA-1866

STEP 5

SECURE THE FIXTURE BODY TO THE MOUNTING PLATE WITH THE SET SCREWS PREVIOUSLY REMOVED.

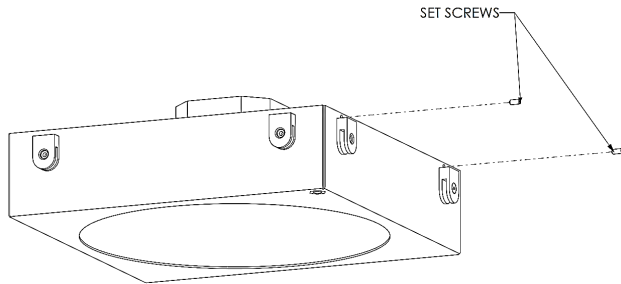


STEP 6

RESTORE POWER TO THE CIRCUIT AND CONFIRM PROPER OPERATION OF THE LIGHT FIXTURE.

STEP 7

SLIDE ACRYLIC PANELS INTO THE SLOTS OF THE TWO BRACKETS AND ALIGN THE HOLES. SECURE GLASS WITH SCREW AND O-RING.

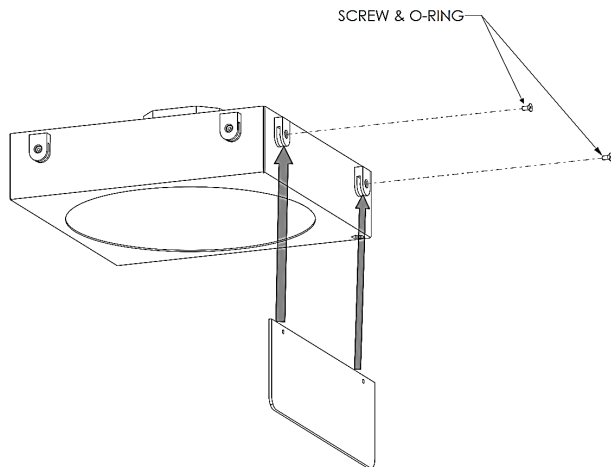

ELECTRICAL CONFIGURATION TABLE

FROM HOME	FROM LUMINAIRE
CONNECT BLACK OR RED (HOT) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE ROUND WIRE/BLACK (HOT)
CONNECT WHITE (NEUTRAL) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE RIBBED WIRE/WHITE (NEUTRAL)
CONNECT GREEN INSULATED OR BARE COPPER (GROUND -) HOUSE SUPPLY CIRCUIT WIRE AND LUMINAIRE BARE STRANDED WIRE (GROUND -) TO GREEN GROUND SCREW ON CROSSBAR.	

GENERAL NOTE: USE UL LISTED WIRE NUTS FOR THE WIRING CONNECTIONS IN THIS LUMINAIRE. WRAP WIRE NUT CONNECTIONS WITH UL LISTED ELECTRICAL TAPE.

FOR QUESTIONS, PLEASE CONTACT CLIENT SERVICES AT: 843.723.8140 OR INFO@URBANELECTRICCO.COM