



GRACIE, WR

ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2515WR

GENERAL NOTES

- CAREFULLY UNPACK THE LUMINAIRE AND INSPECT FOR DAMAGE.
- PLEASE WEAR GLOVES TO PROTECT THE FINISH OF THE FIXTURE.
- SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

NOTICE


- FOR YOUR SAFETY AND PROPER OPERATION OF LUMINAIRE, READ AND UNDERSTAND ALL INSTRUCTIONS COMPLETELY BEFORE COMMENCING INSTALLATION OF THIS LUMINAIRE.
- THIS LUMINAIRE IS SUITED FOR DAMP LOCATIONS.
- THIS LUMINAIRE IS UL LISTED. WHEN INSTALLING LUMINAIRE, CONFORM TO ALL APPLICABLE LOCAL ELECTRICAL CODES, ORDINANCES, AND THE NATIONAL ELECTRICAL CODE (NEC).
- THIS PRODUCT IS RATED FOR TYPE A 60W BULB.

⚠ CAUTION

THIS PRODUCT SHOULD BE INSTALLED ONLY BY A LICENSED ELECTRICIAN.

⚠ WARNING

THE ELECTRICITY MUST BE TURNED OFF AT THE MAIN FUSE BOX BEFORE INSTALLING THIS LUMINAIRE. TURNING POWER OFF USING THE LIGHT SWITCH MAY NOT BE SUFFICIENT TO PREVENT ELECTRICAL SHOCK.

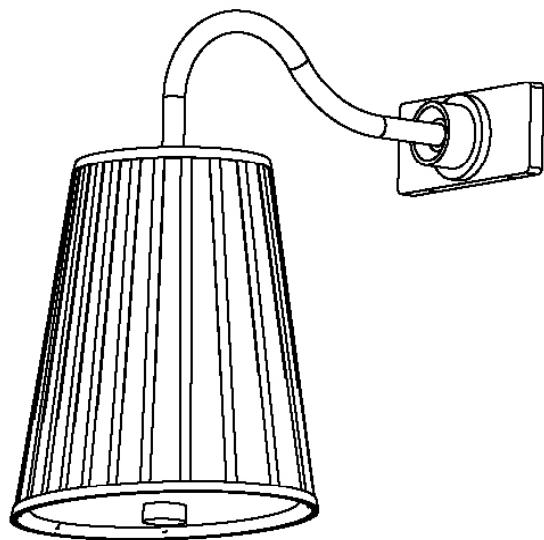


COMPONENTS PROVIDED FOR INSTALLATION

BOX 1

Fixture Assembly	Socket Ring (X2)	Bulb Clip	Diffuser Cap	Bulb
Hex Wrench	Junction Box Screws (X2)	Wire Nuts (X2)	Wood Screws (X2) (Octagonal Option)	Wall Anchors (X2) (Octagonal Option)
Rectangle Back Plate Extension (Optional)	Octagonal Back Plate Extension (Optional)	Round Back Plate (Optional)	Round Back Plate Extension (Optional)	Machine Screws (X2) (Round Extension Option)

BOX 2

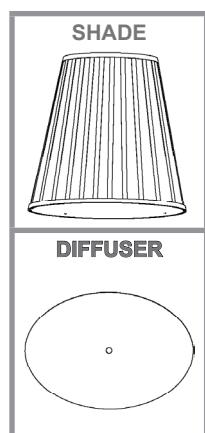



GRACIE, WR

ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2515WR


MOUNTING INSTRUCTIONS - 1 PERSON INSTALL

STEP 1

SHUT OFF THE MAIN ELECTRICAL SUPPLY TO THE JUNCTION BOX FROM THE FUSE BOX/CIRCUIT BREAKER. TURNING POWER OFF AT THE SWITCH IS NOT SUFFICIENT.

STEP 2

USE HEX WRENCH PROVIDED TO LOOSEN SET SCREWS AT BOTTOM OF FIXTURE AND REMOVE MOUNTING PLATE FROM BACK OF FIXTURE ASSEMBLY.

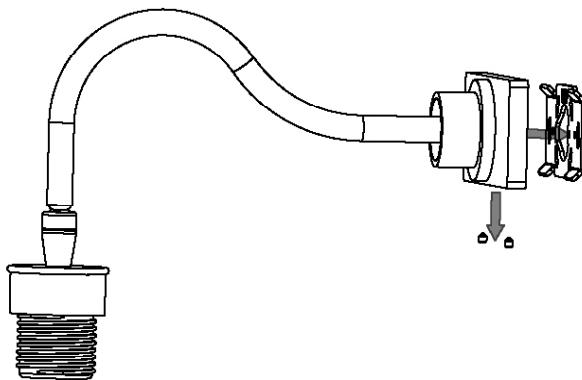


STEP 3

LOCATE JUNCTION BOX AND PULL HOUSE SUPPLY CIRCUIT WIRING THROUGH THE WIRE-WAY OF THE MOUNTING PLATE.


ATTACH THE MOUNTING PLATE TO THE JUNCTION BOX USING THE JUNCTION BOX SCREWS.

IT IS IMPORTANT TO CHECK LEVEL ON THE MOUNTING PLATE.

STANDARD MOUNTING

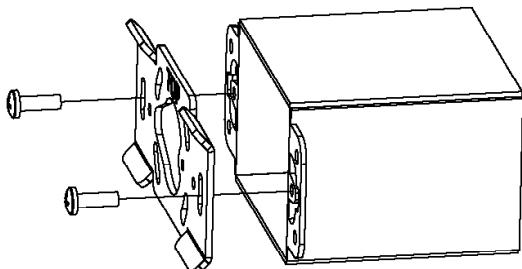

ROUND MOUNTING

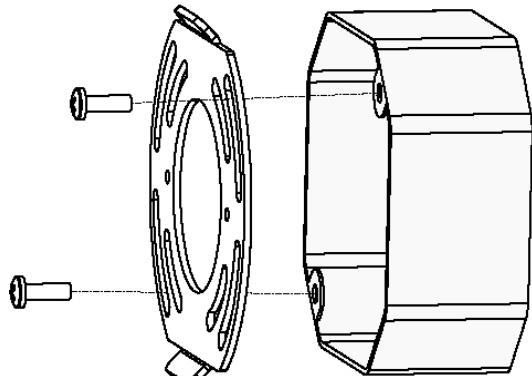

STEP 3 (BACKPLATE EXTENSION OPTION)


LOCATE JUNCTION BOX AND PULL HOUSE SUPPLY CIRCUIT WIRING THROUGH THE WIRE-WAY OF THE MOUNTING PLATE.

THE RECTANGLE BACKPLATE EXT. AND THE ROUND BACKPLATE EXT. BOTH ATTACH USING THE MACHINE SCREWS PROVIDED.


FOR THE OCTAGONAL BACKPLATE EXT. USE THE BACKPLATE EXT. TO MARK THE HOLES FOR THE WOOD SCREWS AND ANCHORS. DRILL AND INSERT ANCHORS INTO WALL. ATTACH BACKPLATE EXT. TO WALL USING WOOD SCREWS.

IT IS IMPORTANT TO CHECK LEVEL ON THE MOUNTING PLATE.


BACKPLATE EXT.

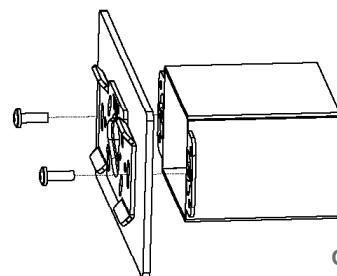

OCTAGONAL BACKPLATE EXT.

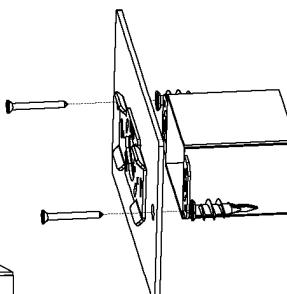

ROUND BACKPLATE EXT.

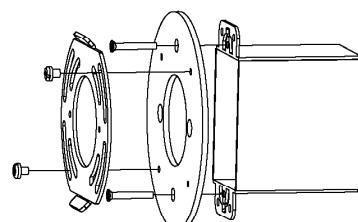



GRACIE, WR

ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2515WR

STEP 4


USING THE WIRE NUTS PROVIDED, MAKE ELECTRICAL CONNECTIONS BY FOLLOWING THE ELECTRICAL CONFIGURATION TABLE BELOW. ENSURE THAT ALL ELECTRICAL CONNECTIONS ARE WRAPPED WITH UL-LISTED ELECTRICAL TAPE.

IMPORTANT: NEVER ALLOW FIXTURE TO "HANG" FROM ELECTRICAL CONNECTIONS OR TO OTHERWISE PUT PRESSURE ON THE CONNECTIONS. THE WEIGHT OF THE FIXTURE SHOULD BE SUPPORTED BY THE MOUNTING ASSEMBLY.

STEP 5

ATTACH THE FIXTURE TO THE WALL BY SLIPPING IT OVER THE MOUNTING PLATE AND TIGHTENING THE SET SCREW AT THE BOTTOM OF THE FIXTURE.


BE CAREFUL TO AVOID SCRATCHING THE FINISH ON THE FIXTURE.

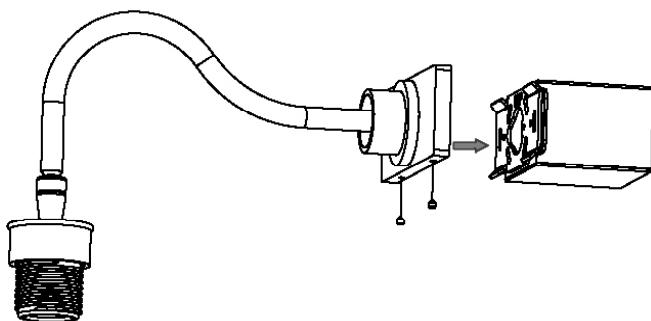

STEP 6

THREAD FIRST SOCKET RING ONTO SOCKET.

SLIDE SHADE ONTO SOCKET AND SECURE BY THREADING SECOND SOCKET RING ONTO SOCKET.

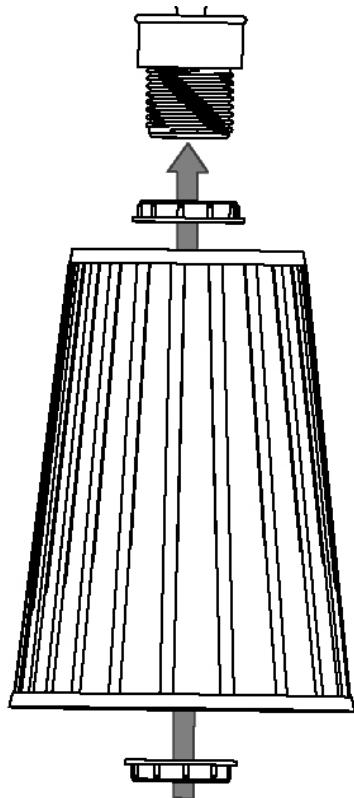


STEP 7

OPEN SPRING ON BULB CLIP AND ATTACH TO BULB.

INSERT THE LIGHT BULB IN THE FIXTURE SOCKET AND RESTORE POWER TO THE FIXTURE.

CONFIRM PROPER OPERATION OF THE LIGHT FIXTURE.

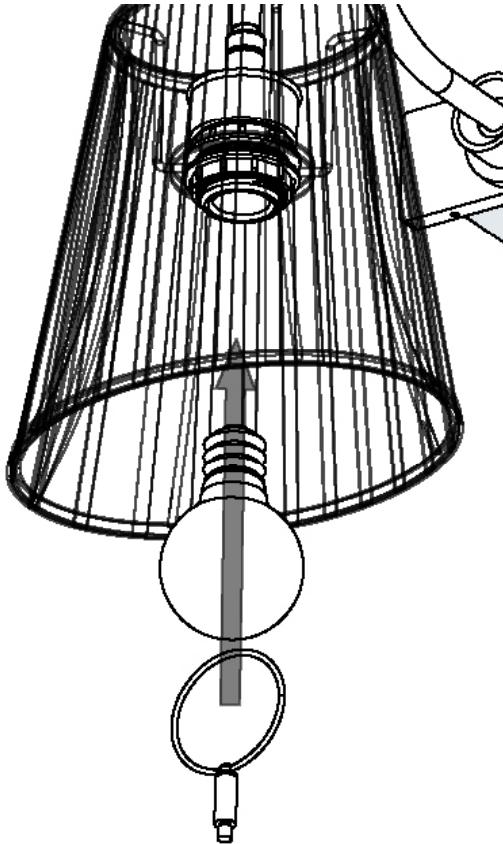



GRACIE, WR


ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2515WR

STEP 8

ATTACH DIFFUSER TO BULB CLIP BY THREADING DIFFUSER CAP ONTO THE BULB CLIP.

FOR EXTERIOR INSTALLS - APPLY SEALANT AROUND BACKPLATE.

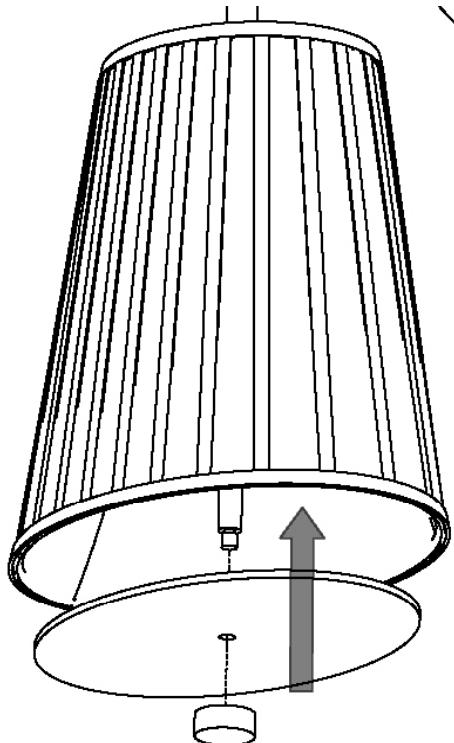

ELECTRICAL CONFIGURATION TABLE

FROM HOME	FROM LUMINAIRE
CONNECT BLACK OR RED (HOT) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE ROUND/BLACK WIRE (HOT)
CONNECT WHITE (NEUTRAL) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE RIBBED/WHITE WIRE (NEUTRAL)
CONNECT GREEN INSULATED OR BARE COPPER (GROUND-) HOUSE SUPPLY CIRCUIT WIRE AND LUMINAIRE BARE STRANDED WIRE (GROUND-) TO GREEN GROUND SCREW ON CROSSBAR.	

GENERAL NOTE: USE UL LISTED WIRE NUTS FOR THE WIRING CONNECTIONS IN THIS LUMINAIRE. WRAP WIRE NUT CONNECTIONS WITH UL LISTED ELECTRICAL TAPE.

FOR QUESTIONS, PLEASE CONTACT CLIENT SERVICES AT: 843.723.8140 OR INFO@URBANELECTRICCO.COM