



HOUE ASSEMBLY AND MOUNTING INSTRUCTIONS

MA-1577

GENERAL NOTES


- THIS LUMINAIRE IS SUITED FOR DAMP LOCATIONS.
- THIS LUMINAIRE IS UL LISTED. WHEN INSTALLING LUMINAIRE, CONFORM TO ALL APPLICABLE LOCAL ELECTRICAL CODES, ORDINANCES, AND THE NATIONAL ELECTRICAL CODE (NEC).
- FOR YOUR SAFETY AND PROPER OPERATION OF LUMINAIRE, READ AND UNDERSTAND ALL INSTRUCTIONS COMPLETELY BEFORE COMMENCING INSTALLATION OF THIS LUMINAIRE.
- CAREFULLY UNPACK THE LUMINAIRE AND INSPECT FOR DAMAGE.
- THIS PRODUCT IS RATED FOR ONE 55W MAX, TYPE B BULB.
- SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

CAUTION


THIS PRODUCT SHOULD BE INSTALLED ONLY BY A LICENSED ELECTRICIAN.

WARNING


THE ELECTRICITY MUST BE TURNED OFF AT THE MAIN FUSE BOX BEFORE INSTALLING THIS LUMINAIRE. TURNING POWER OFF USING THE LIGHT SWITCH MAY NOT BE SUFFICIENT TO PREVENT ELECTRICAL SHOCK.

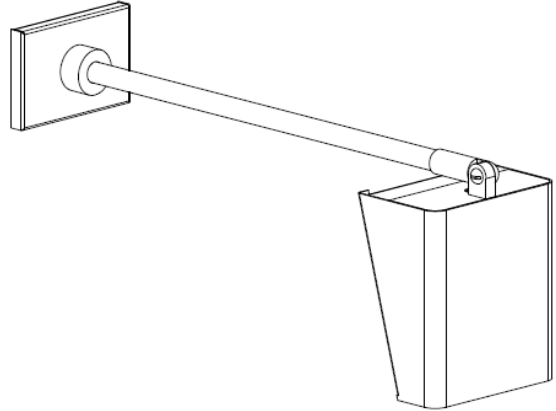

FIXTURE BODY



MOUNTING PLATE



BULB



WIRE NUTS
(X2)



WOOD SCREWS
(X2)



WALL ANCHORS
(X2)



HEX WRENCH



COMPONENTS PROVIDED FOR INSTALLATION



HOUE ASSEMBLY AND MOUNTING INSTRUCTIONS

MA-1577


MOUNTING INSTRUCTIONS

STEP 1

SHUT OFF THE MAIN ELECTRICAL SUPPLY TO THE JUNCTION BOX FROM THE FUSE BOX/CIRCUIT BREAKER. TURNING POWER OFF AT THE SWITCH IS NOT SUFFICIENT.


STEP 2

USING THE PROVIDED HEX WRENCH LOOSEN BOTTOM SET SCREWS ENOUGH TO REMOVE THE MOUNTING PLATE FROM THE BACK OF THE FIXTURE. PLACE FIXTURE ASIDE.

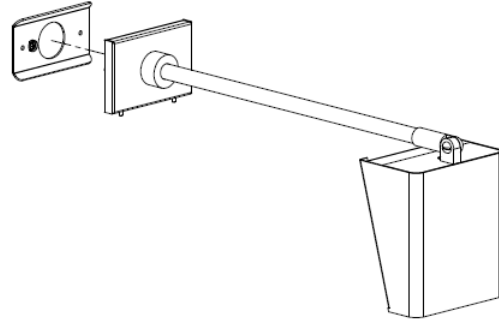

STEP 3

PULL HOUSE SUPPLY CIRCUIT WIRING THROUGH THE WIRE-WAY OF THE MOUNTING PLATE. ATTACH THE MOUNTING PLATE TO THE JUNCTION BOX USING THE JUNCTION BOX SCREWS OR MOUNT DIRECTLY TO THE WALL WITH THE WOOD SCREWS AND WALL ANCHORS PROVIDED. IT IS IMPORTANT TO CHECK LEVEL ON THE MOUNTING PLATE.




STEP 4

USING THE WIRE NUTS PROVIDED, MAKE ELECTRICAL CONNECTIONS BY FOLLOWING THE ELECTRICAL CONFIGURATION TABLE BELOW. ENSURE THAT ALL ELECTRICAL CONNECTIONS ARE WRAPPED WITH UL-LISTED ELECTRICAL TAPE.


STEP 5

ATTACH THE FIXTURE TO THE WALL BY SLIPPING IT OVER THE MOUNTING PLATE AND TIGHTENING THE BOTTOM SET SCREWS. BE CAREFUL TO AVOID SCRATCHING THE FINISH ON THE FIXTURE.

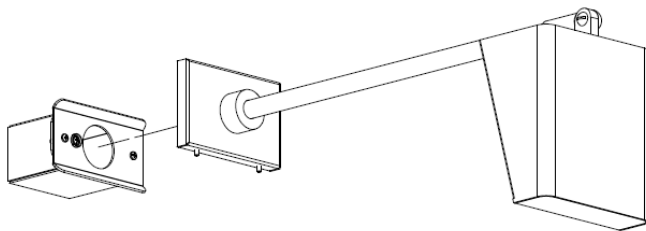

STEP 6

ROTATE FIXTURE SHADE UPWARD AND REMOVE THE GLASS PANE FROM THE FIXTURE.

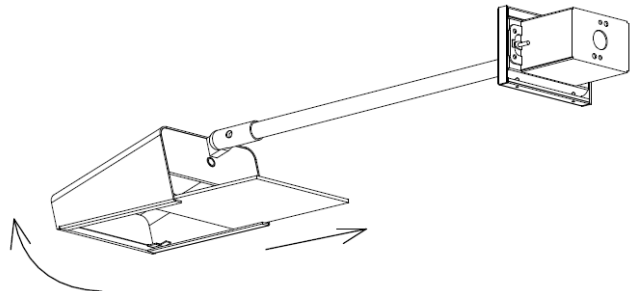




HOUE ASSEMBLY AND MOUNTING INSTRUCTIONS

MA-1577


STEP 7

INSTALL LIGHT BULB AND RESTORE POWER TO THE FIXTURE. CONFIRM PROPER OPERATION OF THE LIGHT FIXTURE.

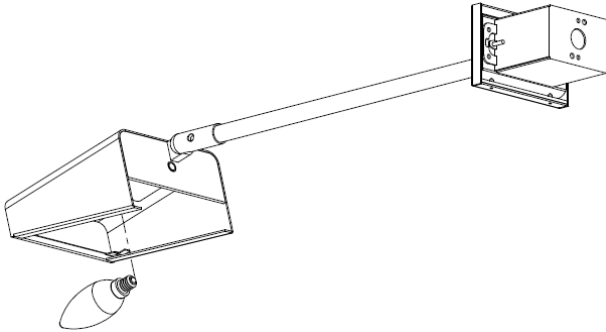

STEP 8

RE-INSTALL GLASS PANE INTO THE FIXTURE BY SLIDING THE GLASS INTO THE FIXTURE SHADE UNTIL THE GLASS REST ON THE BOTTOM LEDGE. ROTATE SHADE TO DESIRED POSITION.

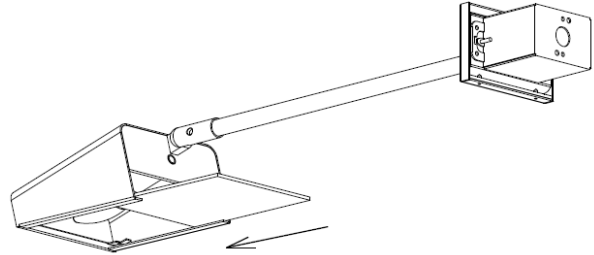

ELECTRICAL CONFIGURATION TABLE

FROM HOME	FROM LUMINAIRE
CONNECT BLACK OR RED (HOT) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE ROUND/BLACK WIRE (HOT)
CONNECT WHITE (NEUTRAL) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE RIBBED/WHITE WIRE (NEUTRAL)
CONNECT GREEN INSULATED OR BARE COPPER (GROUND -) HOUSE SUPPLY CIRCUIT WIRE AND LUMINAIRE BARE STRANDED WIRE (GROUND -) TO GREEN GROUND SCREW	

GENERAL NOTE: USE UL LISTED WIRE NUTS FOR THE WIRING CONNECTIONS IN THIS LUMINAIRE. WRAP WIRE NUT CONNECTIONS WITH UL LISTED ELECTRICAL TAPE.

FOR QUESTIONS, PLEASE CONTACT CLIENT SERVICES AT: 843.723.8140 OR INFO@URBANELECTRICCO.COM