



NINA ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2460

GENERAL NOTES


- THIS LUMINAIRE IS SUITED FOR DAMP LOCATIONS.
- THIS LUMINAIRE IS UL LISTED. WHEN INSTALLING LUMINAIRE, CONFORM TO ALL APPLICABLE LOCAL ELECTRICAL CODES, ORDINANCES, AND THE NATIONAL ELECTRICAL CODE (NEC).
- FOR YOUR SAFETY AND PROPER OPERATION OF LUMINAIRE, READ AND UNDERSTAND ALL INSTRUCTIONS COMPLETELY BEFORE COMMENCING INSTALLATION OF THIS LUMINAIRE.
- CAREFULLY UNPACK THE LUMINAIRE AND INSPECT FOR DAMAGE.
- THIS PRODUCT IS RATED FOR ONE 10W MAX, TYPE T4 BULB.
- SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

CAUTION

THIS PRODUCT SHOULD BE INSTALLED ONLY BY A LICENSED ELECTRICIAN.

WARNING

THE ELECTRICITY MUST BE TURNED OFF AT THE MAIN FUSE BOX BEFORE INSTALLING THIS LUMINAIRE. TURNING POWER OFF USING THE LIGHT SWITCH MAY NOT BE SUFFICIENT TO PREVENT ELECTRICAL SHOCK.

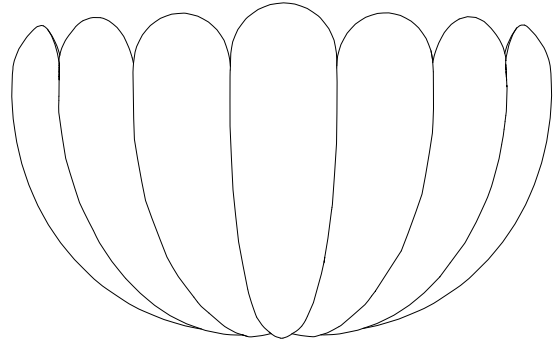

COMPONENTS PROVIDED FOR INSTALLATION

FIXTURE BODY	BACKPLATE EXTENSION (OPTIONAL)	WALL ANCHOR (X2)-FOR BACK PLATE EXTENSION	MOUNTING SCREW (X2)-FOR BACK PLATE EXTENSION
HEX WRENCH	BULB	WIRE NUT (X2)	JUNCTION BOX SCREWS (X2)



NINA ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2460


MOUNTING INSTRUCTIONS – ONE PERSON INSTALL

STEP 1

SHUT OFF MAIN ELECTRICAL SUPPLY TO JUNCTION BOX FROM FUSE BOX/CIRCUIT BREAKER. TURNING POWER OFF AT SWITCH IS NOT SUFFICIENT.

STEP 2


USE HEX WRENCH PROVIDED TO LOOSEN SET SCREWS AT TOP OF FIXTURE AND REMOVE MOUNTING PLATE FROM BACK OF FIXTURE BODY.

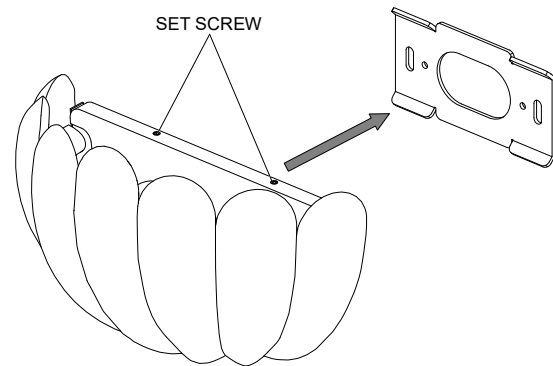

STEP 3

SINGLE GANG JUNCTION BOX SHOULD BE HORIZONTAL. PULL HOUSE SUPPLY CIRCUIT WIRING THROUGH WIRE-WAY OF MOUNTING PLATE AND ATTACH TO JUNCTION BOX USING JUNCTION BOX SCREWS.

FOR OCTAGONAL JUNCTION BOX, ATTACH BACK PLATE EXTENSION DIRECTLY TO WALL WITH WALL AND ANCHORS AND MOUNTING SCREWS.

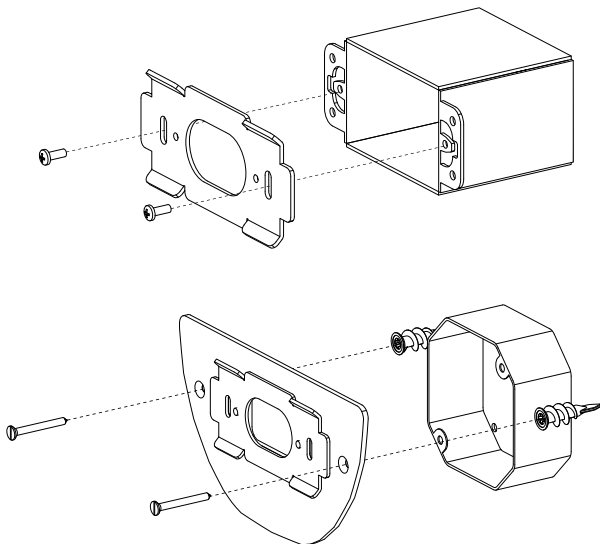

STEP 4

USING WIRE NUTS PROVIDED, MAKE ELECTRICAL CONNECTIONS BY FOLLOWING ELECTRICAL CONFIGURATION TABLE PROVIDED. ENSURE THAT ALL ELECTRICAL CONNECTIONS ARE WRAPPED WITH UL-LISTED ELECTRICAL TAPE.




NINA ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2460


STEP 5

ATTACH FIXTURE BODY TO WALL BY SLIPPING IT OVER MOUNTING PLATE AND TIGHTENING SET SCREWS.

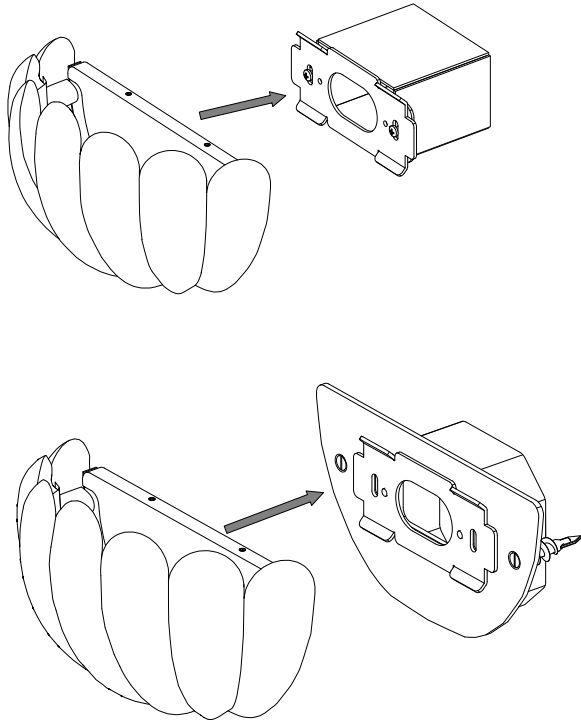

STEP 6

INSTALL BULBS. RETURN POWER TO CIRCUIT. CONFIRM PROPER OPERATION OF FIXTURE.

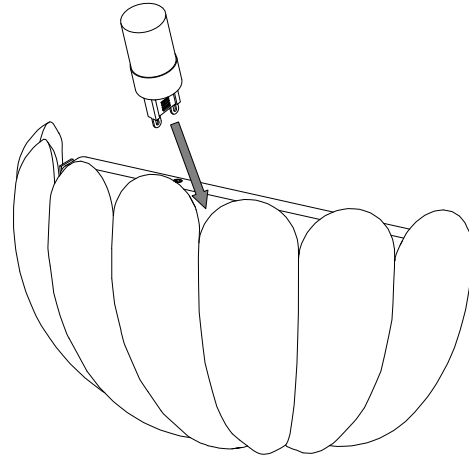

ELECTRICAL CONFIGURATION TABLE

FROM HOME	FROM LUMINAIRE
CONNECT BLACK OR RED (HOT) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE ROUND/BLACK WIRE (HOT)
CONNECT WHITE (NEUTRAL) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE RIBBED/WHITE WIRE (NEUTRAL)
CONNECT GREEN INSULATED OR BARE COPPER (GROUND -) HOUSE SUPPLY CIRCUIT TO GREEN GROUND SCREW ON MOUNTING PLATE.	

GENERAL NOTE: USE UL LISTED WIRE NUTS FOR THE WIRING CONNECTIONS IN THIS LUMINAIRE. WRAP WIRE NUT CONNECTIONS WITH UL LISTED ELECTRICAL TAPE.

FOR QUESTIONS, PLEASE CONTACT CLIENT SERVICES AT:

843.723.8140 OR INFO@URBANELECTRIC.COM