



NYHAVN DOUBLE ASSEMBLY AND MOUNTING INSTRUCTIONS

MA-2044

GENERAL NOTES

- THIS LUMINAIRE IS SUITED FOR DAMP LOCATIONS.
- THIS LUMINAIRE IS UL LISTED. WHEN INSTALLING LUMINAIRE, CONFORM TO ALL APPLICABLE LOCAL ELECTRICAL CODES, ORDINANCES, AND THE NATIONAL ELECTRICAL CODE (NEC).
- FOR YOUR SAFETY AND PROPER OPERATION OF LUMINAIRE, READ AND UNDERSTAND ALL INSTRUCTIONS COMPLETELY BEFORE COMMENCING INSTALLATION OF THIS LUMINAIRE.
- CAREFULLY UNPACK THE LUMINAIRE AND INSPECT FOR DAMAGE.
- THIS PRODUCT IS RATED FOR TWO 60W MAX, TYPE A BULB.
- SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

CAUTION








THIS PRODUCT SHOULD BE INSTALLED ONLY BY A LICENSED ELECTRICIAN.

WARNING

THE ELECTRICITY MUST BE TURNED OFF AT THE MAIN FUSE BOX BEFORE INSTALLING THIS LUMINAIRE. TURNING POWER OFF USING THE LIGHT SWITCH MAY NOT BE SUFFICIENT TO PREVENT ELECTRICAL SHOCK.



COMPONENTS PROVIDED FOR INSTALLATION

FIXTURE BODY 	MOUNTING PLATE 	SHADE (2X) 	BACKPLATE EXTENSION (OPTIONAL) 
WIRE NUT (2X) 	HEX WRENCH 	BULB (2X) 	



NYHAVN DOUBLE ASSEMBLY AND MOUNTING INSTRUCTIONS

MA-2044


MOUNTING INSTRUCTIONS

STEP 1

SHUT OFF MAIN ELECTRICAL SUPPLY TO JUNCTION BOX FROM FUSE BOX/CIRCUIT BREAKER. TURNING POWER OFF AT SWITCH IS NOT SUFFICIENT.


STEP 2

USE HEX WRENCH PROVIDED TO LOOSEN SET SCREW AT BOTTOM OF FIXTURE AND REMOVE MOUNTING PLATE FROM BACK OF FIXTURE BODY.

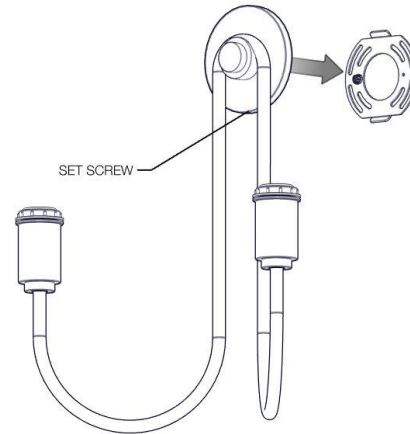


STEP 3

PULL HOUSE SUPPLY CIRCUIT WIRING THROUGH WIRE-WAY OF MOUNTING PLATE AND ATTACH TO JUNCTION BOX USING JUNCTION BOX SCREWS.

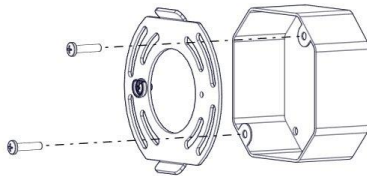

FOR SINGLE GANG JUNCTION BOX, ATTACH BACKPLATE EXTENSION TO JUNCTION BOX WITH TWO SCREWS. ATTACH MOUNTING PLATE TO BACKPLATE EXTENSION WITH FOUR SCREWS.

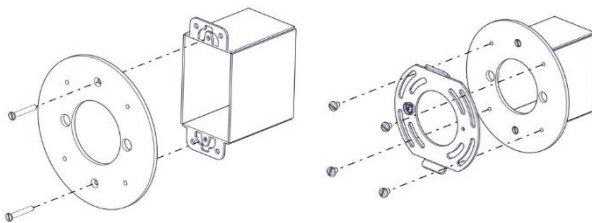

STEP 4

USING WIRE NUTS PROVIDED, MAKE ELECTRICAL CONNECTIONS BY FOLLOWING ELECTRICAL CONFIGURATION TABLE PROVIDED. ENSURE THAT ALL ELECTRICAL CONNECTIONS ARE WRAPPED WITH UL-LISTED ELECTRICAL TAPE.




NYHAVN DOUBLE ASSEMBLY AND MOUNTING INSTRUCTIONS

MA-2044

STEP 5

ATTACH FIXTURE BODY TO WALL BY SLIPPING IT OVER MOUNTING PLATE AND TIGHTENING SET SCREW.

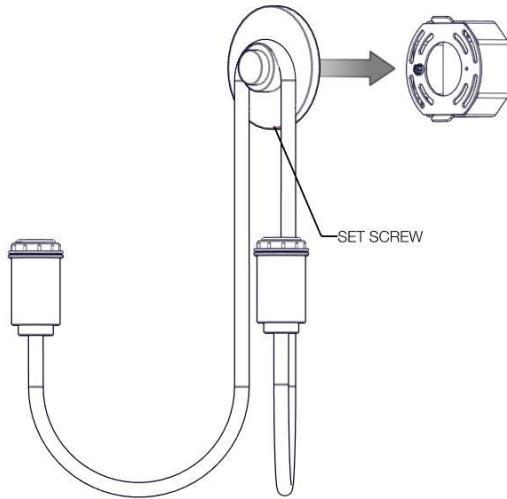

STEP 6

UNTHREAD SCREW COLLAR FROM SOCKET CUP. PLACE SHADE ON FIXTURE. THREAD SCREW COLLAR BACK ONTO FIXTURE. REPEAT FOR SECOND SHADE. ENSURE SHADES ARE LEVEL BY ADJUSTING SOCKET CUP.



STEP 7

INSTALL BULBS AND RESTORE POWER TO CIRCUIT. CONFIRM PROPER OPERATION OF LIGHT FIXTURE.

ELECTRICAL CONFIGURATION TABLE

FROM HOME	FROM LUMINAIRE
CONNECT BLACK OR RED (HOT) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE ROUND/BLACK WIRE (HOT)
CONNECT WHITE (NEUTRAL) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE RIBBED/WHITE WIRE (NEUTRAL)
CONNECT GREEN INSULATED OR BARE COPPER (GROUND -) HOUSE SUPPLY CIRCUIT TO GREEN GROUND SCREW ON MOUNTING PLATE.	

GENERAL NOTE: USE UL LISTED WIRE NUTS FOR THE WIRING CONNECTIONS IN THIS LUMINAIRE. WRAP WIRE NUT CONNECTIONS WITH UL LISTED ELECTRICAL TAPE.

FOR QUESTIONS, PLEASE CONTACT CLIENT SERVICES AT:
843.723.8140 OR INFO@URBANELECTRIC.COM