



**PAIGE**

## ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2268

### GENERAL NOTES

- THIS LUMINAIRE IS SUITED FOR DAMP LOCATIONS.
- THIS LUMINAIRE IS UL LISTED. WHEN INSTALLING LUMINAIRE, CONFORM TO ALL APPLICABLE LOCAL ELECTRICAL CODES, ORDINANCES, AND THE NATIONAL ELECTRICAL CODE (NEC).
- FOR YOUR SAFETY AND PROPER OPERATION OF LUMINAIRE, READ AND UNDERSTAND ALL INSTRUCTIONS COMPLETELY BEFORE COMMENCING INSTALLATION OF THIS LUMINAIRE.
- CAREFULLY UNPACK THE LUMINAIRE AND INSPECT FOR DAMAGE.
- THIS PRODUCT IS RATED FOR TWO 60W MAX, TYPE A BULB.
- SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

#### CAUTION












THIS PRODUCT SHOULD BE INSTALLED ONLY BY A LICENSED ELECTRICIAN.

#### WARNING

THE ELECTRICITY MUST BE TURNED OFF AT THE MAIN FUSE BOX BEFORE INSTALLING THIS LUMINAIRE. TURNING POWER OFF USING THE LIGHT SWITCH MAY NOT BE SUFFICIENT TO PREVENT ELECTRICAL SHOCK.



### COMPONENTS PROVIDED FOR INSTALLATION

<b>FIXTURE BODY</b> 	<b>SHADE (x2)</b> 	<b>BOTTOM STEM (X2)</b> 	<b>BACKPLATE EXTENSION (OPTIONAL)</b> 	<b>BULB (X2)</b> 	<b>SOCKET RINGS (X2)</b> 
<b>WIRE NUTS (X3)</b> 	<b>HEX WRENCH</b> 	<b>MOUNTING SCREWS (X2)</b> 	<b>(X2) WALL ANCHORS</b> 	<b>JUNCTION BOX SCREWS (X2)</b> 	



**PAIGE**

ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2268


**MOUNTING INSTRUCTIONS – TWO PERSON INSTALL**

**STEP 1**

SHUT OFF THE MAIN ELECTRICAL SUPPLY TO THE JUNCTION BOX FROM THE FUSE BOX/CIRCUIT BREAKER. TURNING POWER OFF AT THE SWITCH IS NOT SUFFICIENT.


**STEP 2**

USING THE PROVIDED HEX WRENCH, LOOSEN THE SET SCREW AT THE BOTTOM OF THE FIXTURE BODY ENOUGH TO REMOVE THE MOUNTING PLATE.

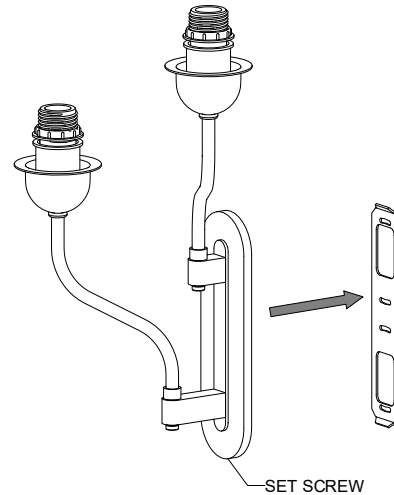

**STEP 3**


LIFT MOUNTING PLATE TO JUNCTION BOX AND MARK HOLES FOR WALL ANCHORS. DRILL HOLES AND INSTALL ANCHORS INTO WALL. (1 ANCHOR OR SINGLE GANG, 2 FOR OCTAGONAL JUNCTION BOX)

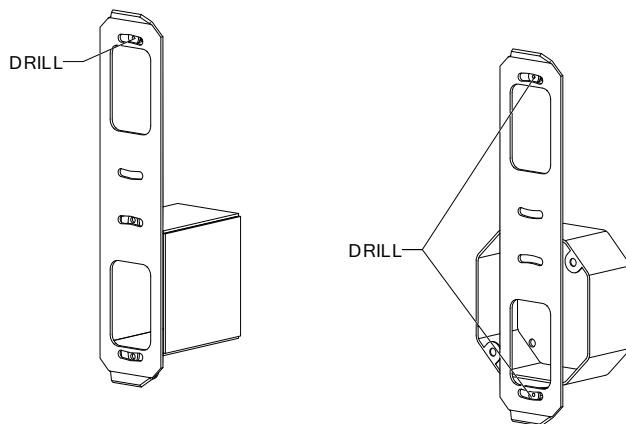

**STEP 4**

PULL HOUSE SUPPLY CIRCUIT WIRING THROUGH THE WIRE-WAY OF THE MOUNTING PLATE. ATTACH THE MOUNTING PLATE TO THE JUNCTION BOX USING THE JUNCTION BOX SCREWS AND DIRECTLY TO THE WALL WITH THE MOUNTING SCREWS AND WALL ANCHORS PROVIDED. IT IS IMPORTANT TO CHECK LEVEL ON THE MOUNTING PLATE.

FOR BACK PLATE EXTENSION, INSTALL BACK PLATE EXTENSION BETWEEN WALL AND MOUNTING PLATE.

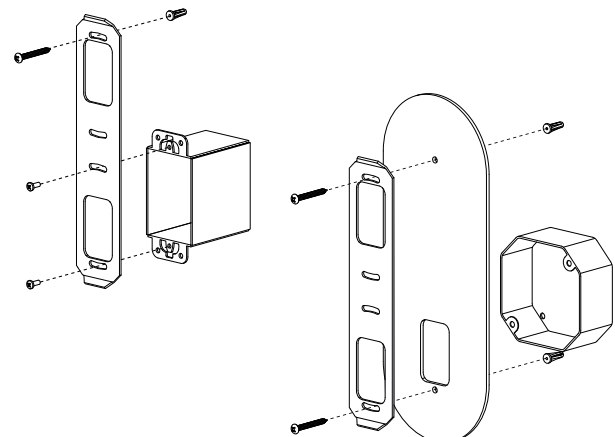



**PAIGE**

## ASSEMBLY AND MOUNTING INSTRUCTIONS


UE-2268

### STEP 5

USING THE WIRE NUTS PROVIDED, MAKE ELECTRICAL CONNECTIONS BY FOLLOWING THE ELECTRICAL CONFIGURATION TABLE PROVIDED. ENSURE THAT ALL ELECTRICAL CONNECTIONS ARE WRAPPED WITH UL-LISTED ELECTRICAL TAPE.


### STEP 6

ATTACH THE FIXTURE BODY TO THE WALL BY SLIPPING IT OVER THE MOUNTING PLATE AND TIGHTENING THE SET SCREW. BE CAREFUL TO AVOID SCRATCHING THE FINISH ON THE FIXTURE.

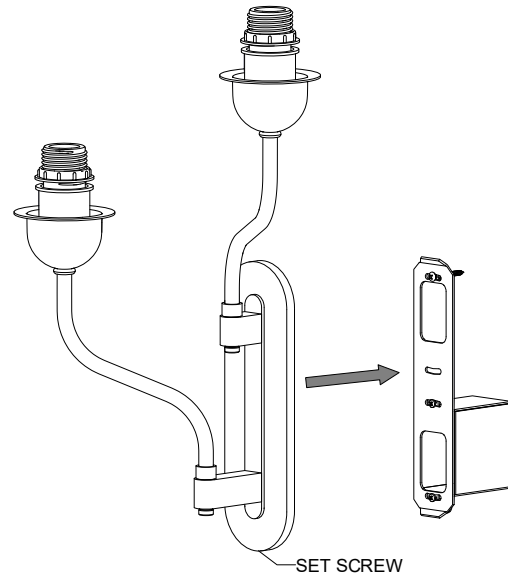


### STEP 7

ORIENT ARMS TO PREFERRED ORIENTATION AND TIGHTEN SCREW IN BASE OF EACH DIVING BOARD WITH HEX WRENCH.

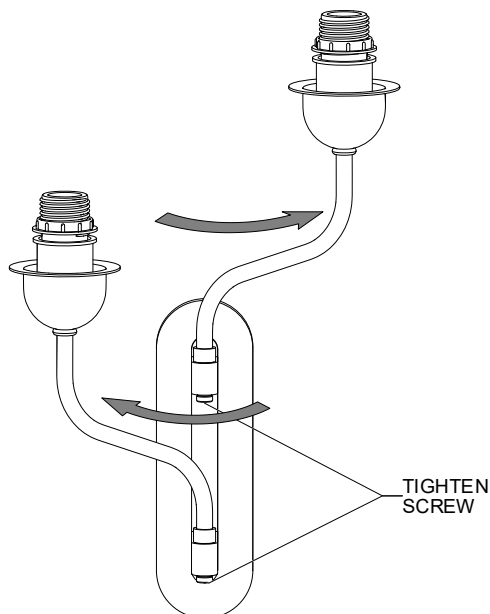

### STEP 8

INSTALL BOTTOM STEMS TO FIXTURE BODY.

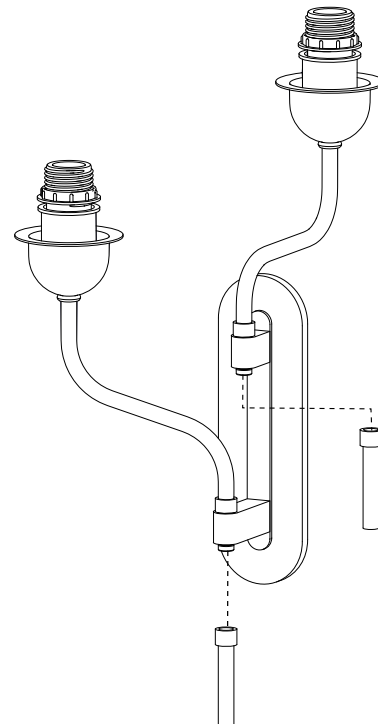



**PAIGE**


## ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2268

### STEP 9

INSTALL THE SHADES AND SECURE WITH SOCKET RINGS.

INSTALL THE LIGHT BULBS AND RESTORE POWER TO THE CIRCUIT. CONFIRM PROPER OPERATION OF THE LIGHT FIXTURE.

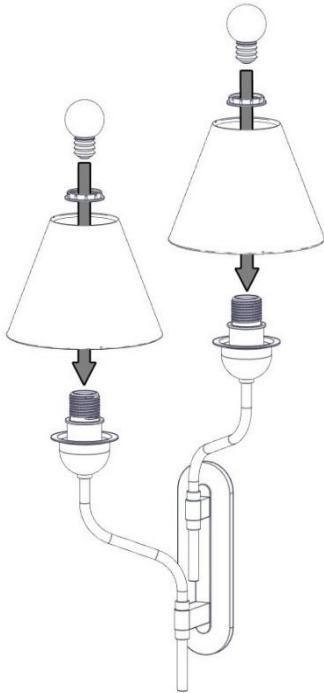

### ELECTRICAL CONFIGURATION TABLE

FROM HOME	FROM LUMINAIRE
CONNECT BLACK OR RED (HOT) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE ROUND/BLACK WIRE (HOT)
CONNECT WHITE (NEUTRAL) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE RIBBED/WHITE WIRE (NEUTRAL)
CONNECT GREEN INSULATED OR BARE COPPER (GROUND -) HOUSE SUPPLY CIRCUIT WIRE AND LUMINAIRE BARE STRANDED WIRE (GROUND -) TO GREEN GROUND SCREW ON CROSSBAR.	

**GENERAL NOTE:** USE UL LISTED WIRE NUTS FOR THE WIRING CONNECTIONS IN THIS LUMINAIRE. WRAP WIRE NUT CONNECTIONS WITH UL LISTED ELECTRICAL TAPE.

FOR QUESTIONS, PLEASE CONTACT CLIENT SERVICES AT:  
843.723.8140 OR [INFO@URBANELECTRICCO.COM](mailto:INFO@URBANELECTRICCO.COM)