



# PARLOR DOUBLE, HR

## ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2522HR

### GENERAL NOTES

- CAREFULLY UNPACK THE LUMINAIRE AND INSPECT FOR DAMAGE.
- PLEASE WEAR GLOVES TO PROTECT THE FINISH OF THE FIXTURE.
- SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

#### NOTICE


- FOR YOUR SAFETY AND PROPER OPERATION OF LUMINAIRE, READ AND UNDERSTAND ALL INSTRUCTIONS COMPLETELY BEFORE COMMENCING INSTALLATION OF THIS LUMINAIRE.
- THIS LUMINAIRE IS SUITED FOR DAMP LOCATIONS.
- THIS LUMINAIRE IS UL LISTED. WHEN INSTALLING LUMINAIRE, CONFORM TO ALL APPLICABLE LOCAL ELECTRICAL CODES, ORDINANCES, AND THE NATIONAL ELECTRICAL CODE (NEC).
- THIS PRODUCT IS RATED FOR FOUR 60W MAX TYPE A BULBS

#### CAUTION

THIS PRODUCT SHOULD BE INSTALLED ONLY BY A LICENSED ELECTRICIAN.

















#### WARNING

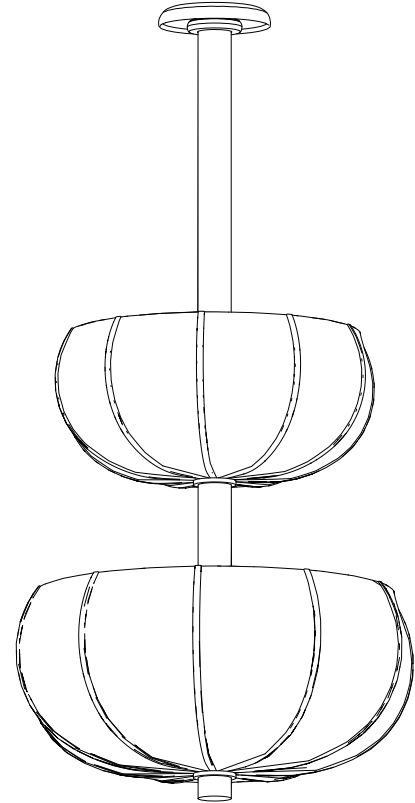THE ELECTRICITY MUST BE TURNED OFF AT THE MAIN FUSE BOX BEFORE INSTALLING THIS LUMINAIRE. TURNING POWER OFF USING THE LIGHT SWITCH MAY NOT BE SUFFICIENT TO PREVENT ELECTRICAL SHOCK.



### COMPONENTS PROVIDED FOR INSTALLATION

#### BOX 1

<p>TOP DOWNROD ASSEMBLY</p> 	<p>BOTTOM DOWNROD ASSEMBLY</p> 	<p>TOP ELECTRICAL ASSEMBLY</p> 	<p>BOTTOM ELECTRICAL ASSEMBLY</p> 	<p>CANOPY</p> 	
<p>FINIAL</p> 	<p>ACORN NUTS (X8)</p> 	<p>CHECK RING (X2)</p> 	<p>HEX NIP (X2)</p> 	<p>MOUNTING ADAPTOR</p> 	
<p>SHADE HOLDER (X2)</p> 	<p>BULBS (X4)</p> 	<p>WIRE HARNESS</p> 	<p>JUNCTION BOX SCREWS (X4)</p> 	<p>WIRE NUTS (X2)</p> 	<p>LOCTITE</p> 




# PARLOR DOUBLE, HR


## ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2522HR

### BOX 2

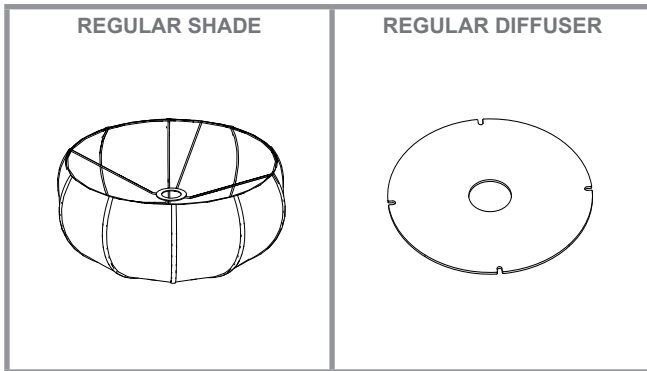

### BOX 3

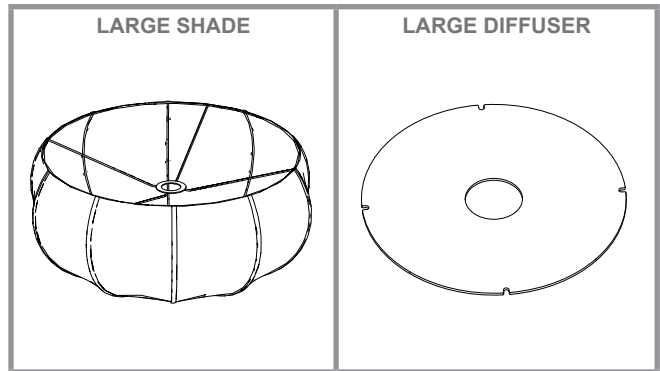

## MOUNTING INSTRUCTIONS - 2 PERSON INSTALL

### STEP 1


SHUT OFF THE MAIN ELECTRICAL SUPPLY TO THE JUNCTION BOX FROM THE FUSE BOX/CIRCUIT BREAKER. TURNING POWER OFF AT THE SWITCH IS NOT SUFFICIENT.

### STEP 2

ATTACH ONE SHADE HOLDER TO TOP DOWNROD ASSEMBLY WITH CHECK RING AND HEX NIP **\*NOTE: FLAT FACE OF CHECK RING SHOULD BE AGAINST SHADE HOLDER\***

SLIDE REGULAR DIFFUSER DOWN LENGTH OF TOP DOWNROD ASSEMBLY.

FOR EXTENDED DOWNROD MOUNTING THERE WILL BE AN ADDITIONAL DOWNROD WITH A COUPLER IN BETWEEN THE TWO.

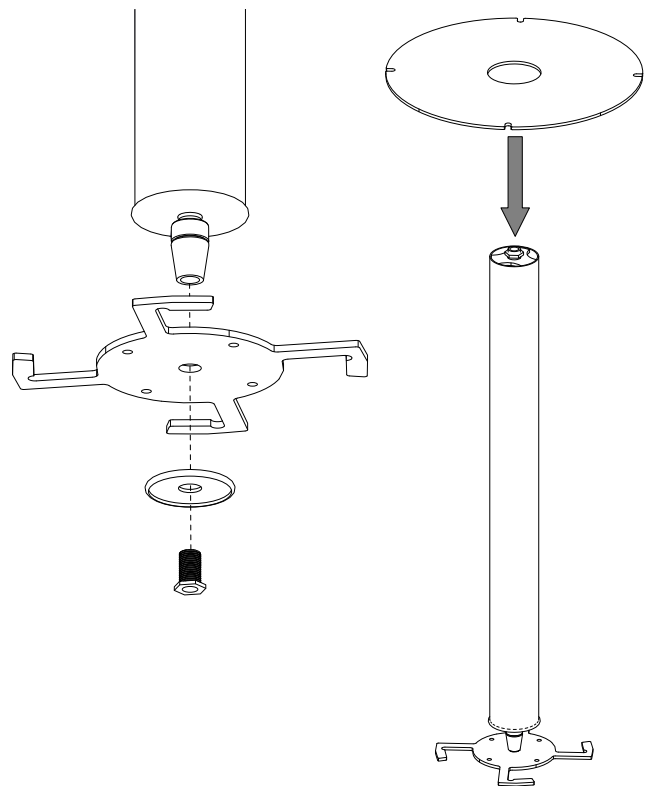



# PARLOR DOUBLE, HR


## ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2522HR

### STEP 3

REMOVE HEX NUT FROM TOP DOWNROD ASSEMBLY.


ATTACH CANOPY ASSEMBLY TO ALLTHREAD AND REATTACH HEX NUT.

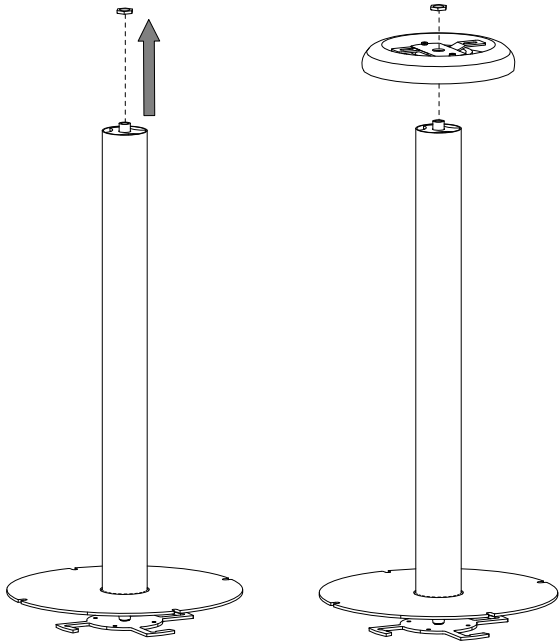

### STEP 4

RUN WIRE HARNESS THROUGH TOP DOWNROD ASSEMBLY


UNSCREW SCREW COLLAR FROM CANOPY. SLIDE COLLAR AND CANOPY DOWN LENGTH OF DOWNROD AND LET REST ON DIFFUSER.

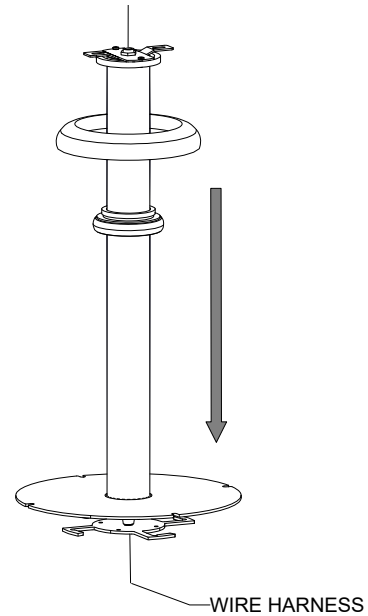

### STEP 5

LIFT DOWNROD ASSEMBLY TO CEILING AND ATTACH TO JUNCTION BOX WITH JUNCTION BOX SCREWS.

IF USING UNIVERSAL MOUNTING ADAPTOR, ATTACH MOUNTING ADAPTOR TO JUNCTION BOX FIRST WITH ADDITIONAL SCREWS AND THEN ATTACH DOWNROD ASSEMBLY TO MOUNTING ADAPTOR.

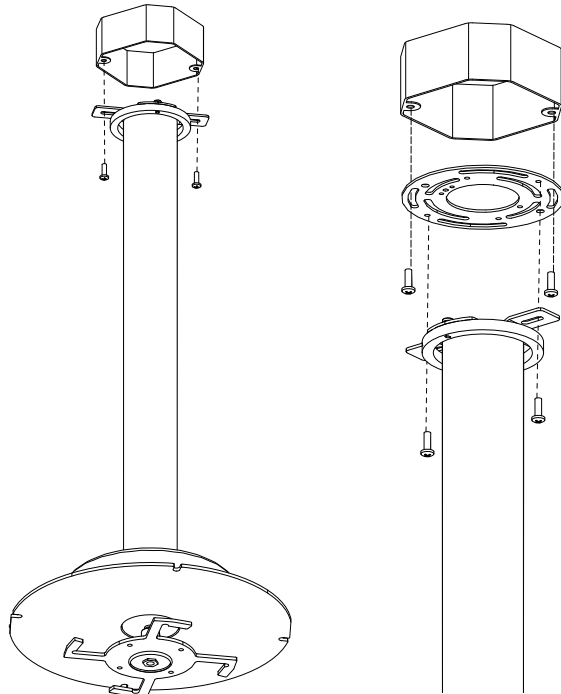

### STEP 6

USING THE WIRE NUTS PROVIDED, MAKE ELECTRICAL CONNECTIONS BY FOLLOWING THE ELECTRICAL CONFIGURATION TABLE BELOW. ENSURE THAT ALL ELECTRICAL CONNECTIONS ARE WRAPPED WITH UL-LISTED ELECTRICAL TAPE.

**IMPORTANT: NEVER ALLOW FIXTURE TO "HANG" FROM ELECTRICAL CONNECTIONS OR TO OTHERWISE PUT PRESSURE ON THE CONNECTIONS. THE WEIGHT OF THE FIXTURE SHOULD BE SUPPORTED BY THE MOUNTING ASSEMBLY.**




# PARLOR DOUBLE, HR

## ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2522HR


### STEP 7

LIFT CANOPY TO CEILING AND SECURE IN PLACE WITH SCREW COLLAR.

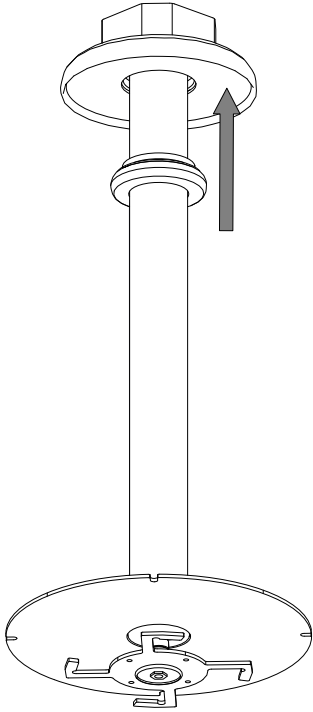

### STEP 8

LIFT DIFFUSER OUT OF THE WAY AND ATTACH REGULAR SHADE BY LIFTING INTO SHADE HOLDER AND ROTATING INTO PLACE.

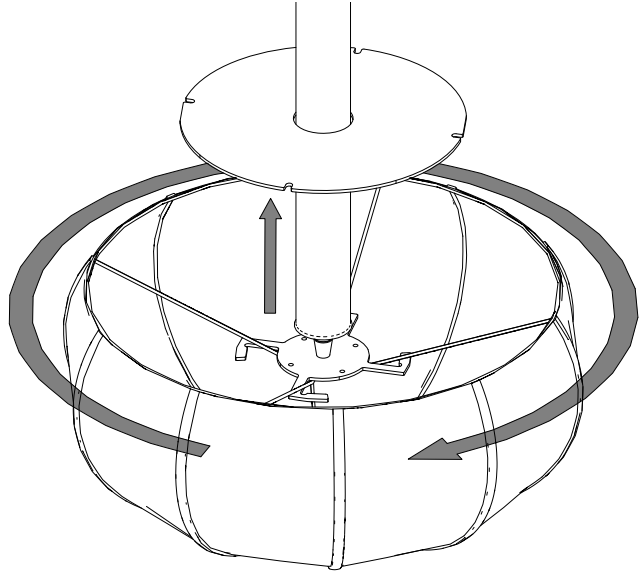


### STEP 9

INSERT TOP ELECTRICAL CLUSTER (WITH WIRES COMING OUT THE BASE) INTO SHADE. MAKE WIRE CONNECTIONS IN CLUSTER BODY AND TUCK WIRES IN.

ATTACH TO DOWNROD ASSEMBLY WITH 4 ACORN NUTS.


LET DIFFUSER REST ON SHADE SO THAT SHADE ARMS SIT IN NOTCHES OF DIFFUSER

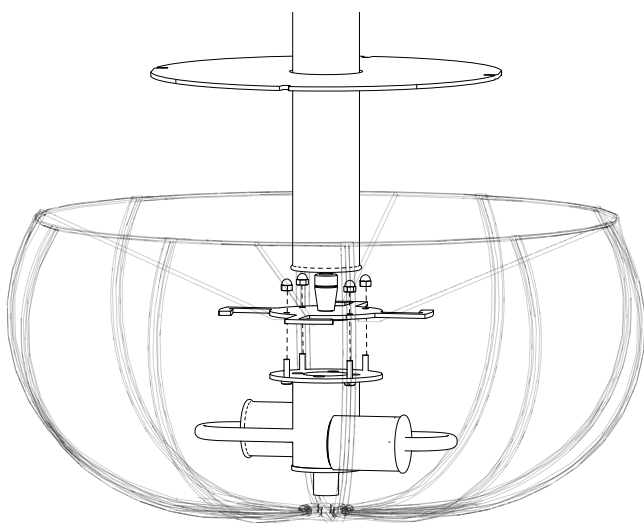

### STEP 10

ATTACH ONE SHADE HOLDER TO BOTTOM DOWNROD ASSEMBLY WITH CHECK RING AND HEX NIP \*NOTE: FLAT FACE OF CHECK RING SHOULD BE AGAINST SHADE HOLDER\*

SLIDE LARGE DIFFUSER DOWN LENGTH OF BOTTOM DOWNROD ASSEMBLY.

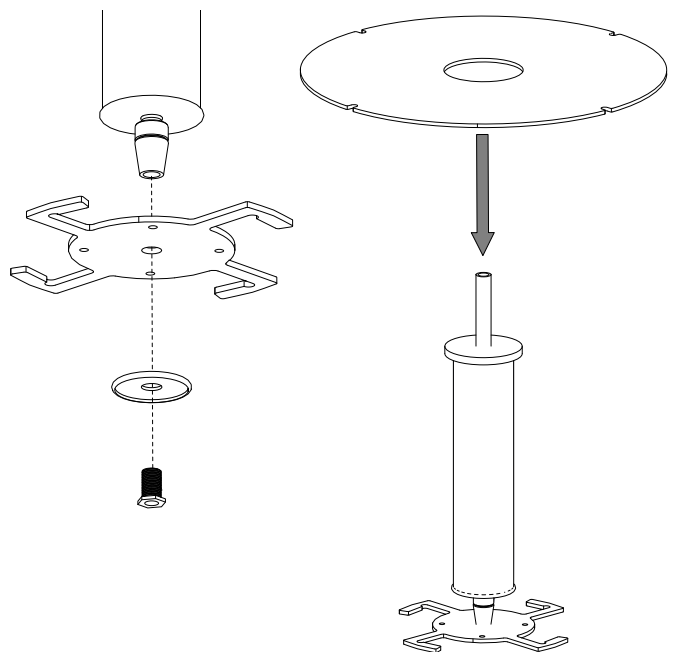



# PARLOR DOUBLE, HR


## ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2522HR

### STEP 11


FEED WIRE THROUGH BOTTOM DOWNROD ASSEMBLY.

APPLY LOCTITE TO ALLTHREAD AND SCREW THOROUGH SHADE AND INTO COUPLER AT BASE TO TOP ELECTRICAL CLUSTER UNTIL SNUG AGAINST TOP SHADE.

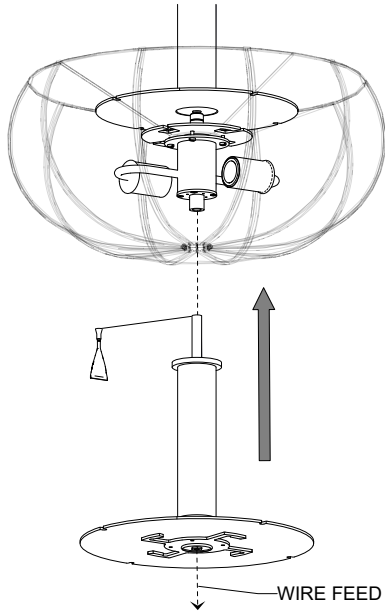


### STEP 12

UNSCREW TOP PORTION OF FINIAL ASSEMBLY. ATTACH FINIAL ASSEMBLY TO LARGE SHADE.

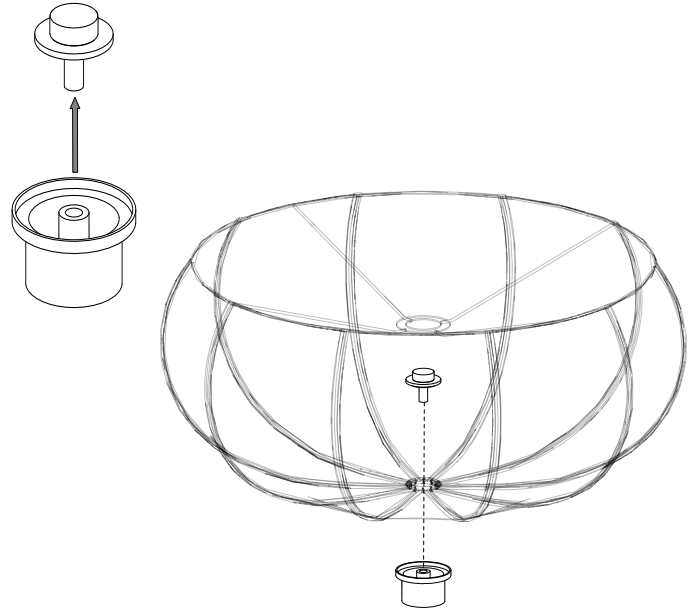

### STEP 13

LIFT DIFFUSER OUT OF THE WAY AND ATTACH LARGE SHADE BY LIFTING INTO SHADE HOLDER AND ROTATING INTO PLACE.

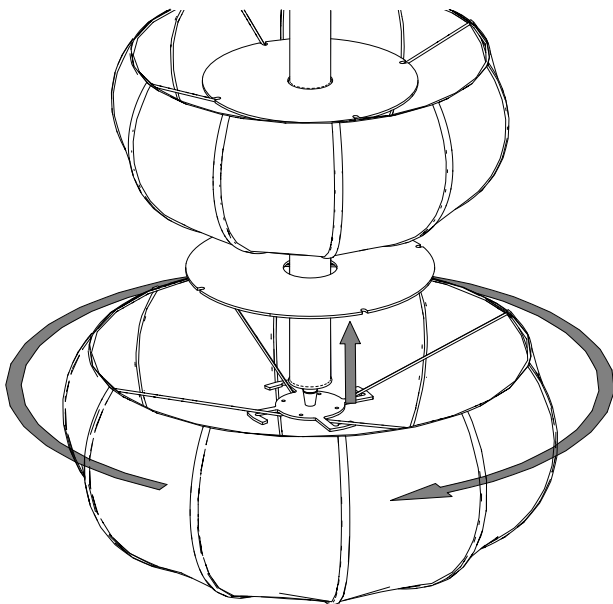


### STEP 14

INSERT BOTTOM ELECTRICAL CLUSTER INTO SHADE. MAKE WIRE CONNECTIONS IN CLUSTER BODY AND TUCK WIRES IN.

ATTACH TO FIXTURE ASSEMBLY WITH REMAINING 4 ACORN NUTS.

LET DIFFUSER REST ON SHADE SO THAT SHADE ARMS SIT IN NOTCHES OF DIFFUSER.

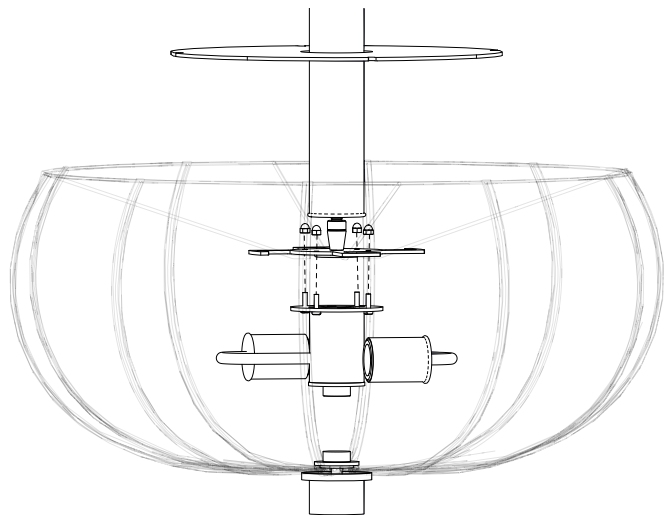




# PARLOR DOUBLE, HR

## ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2522HR

### STEP 15

INSTALL BULBS. RETURN POWER TO CIRCUIT. CONFIRM PROPER OPERATION OF FIXTURE.

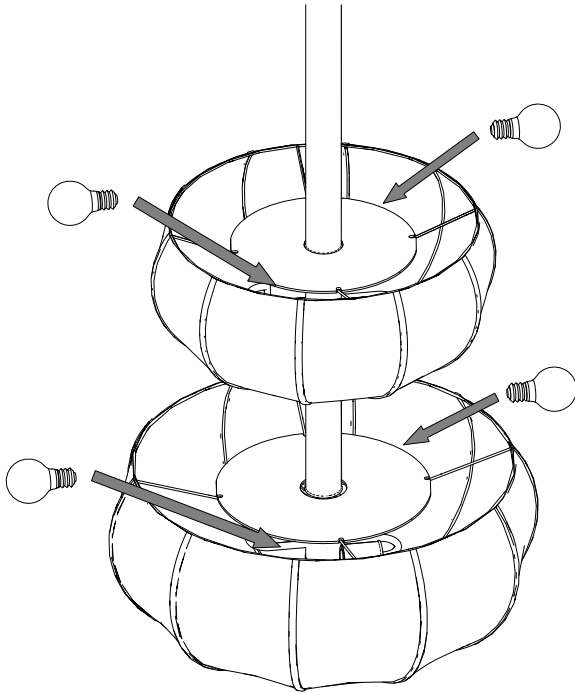

### ELECTRICAL CONFIGURATION TABLE

FROM HOME	FROM LUMINAIRE
CONNECT BLACK OR RED (HOT) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE ROUND/BLACK WIRE (HOT)
CONNECT WHITE (NEUTRAL) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE RIBBED/WHITE WIRE (NEUTRAL)
CONNECT GREEN INSULATED OR BARE COPPER (GROUND -) HOUSE SUPPLY CIRCUIT WIRE AND LUMINAIRE BARE STRANDED WIRE (GROUND -) TO GREEN GROUND SCREW ON CROSSBAR.	

**GENERAL NOTE:** USE UL LISTED WIRE NUTS FOR THE WIRING CONNECTIONS IN THIS LUMINAIRE. WRAP WIRE NUT CONNECTIONS WITH UL LISTED ELECTRICAL TAPE.

FOR QUESTIONS, PLEASE CONTACT CLIENT SERVICES AT: 843.723.8140 OR [INFO@URBANELECTRICCO.COM](mailto:INFO@URBANELECTRICCO.COM)