



# PLISSE

## ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2395

### GENERAL NOTES


- THIS LUMINAIRE IS SUITED FOR DAMP LOCATIONS.
- WHEN INSTALLING LUMINAIRE, CONFORM TO ALL APPLICABLE LOCAL ELECTRICAL CODES, ORDINANCES, AND THE NATIONAL ELECTRICAL CODE (NEC).
- FOR YOUR SAFETY AND PROPER OPERATION OF LUMINAIRE, READ AND UNDERSTAND ALL INSTRUCTIONS COMPLETELY BEFORE COMMENCING INSTALLATION OF THIS LUMINAIRE.
- CAREFULLY UNPACK THE LUMINAIRE AND INSPECT FOR DAMAGE.
- THIS FIXTURE IS RATED FOR THREE 60W MAX, TYPE A BULBS.
- SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

### CAUTION

- THIS PRODUCT SHOULD BE INSTALLED ONLY BY A LICENSED ELECTRICIAN.

### WARNING

THE ELECTRICITY MUST BE TURNED OFF AT THE MAIN FUSE BOX BEFORE INSTALLING THIS LUMINAIRE. TURNING POWER OFF USING THE LIGHT SWITCH MAY NOT BE SUFFICIENT TO PREVENT ELECTRICAL SHOCK.

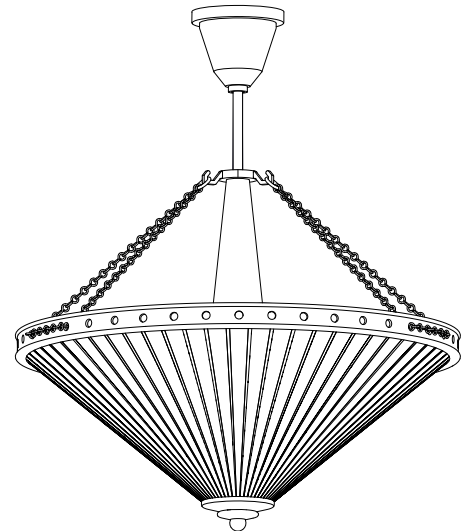

### COMPONENTS PROVIDED FOR INSTALLATION

CENTER BODY	RING	FINIAL	CHAIN (X3)	CANOPY	SHADE
ELECTRICAL	MOUNTING ASSEMBLY	PAN HEAD SCREWS (X3)	DOWNROD	JUNCTION BOX SCREWS (X2)	BULB (X3)




# PLISSE


## ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2395

LOCTITE



WIRE NUTS (X2)




### MOUNTING INSTRUCTIONS – 2 PERSON INSTALLATION

#### STEP 1

SHUT OFF THE MAIN ELECTRICAL SUPPLY TO THE JUNCTION BOX FROM THE FUSE BOX/CIRCUIT BREAKER. TURNING POWER OFF AT THE SWITCH IS NOT SUFFICIENT.

#### STEP 2

RUN WIRES THROUGH CENTER BODY AND ATTACH ELECTRICAL PLATE WITH THREE PAN HEAD SCREWS.

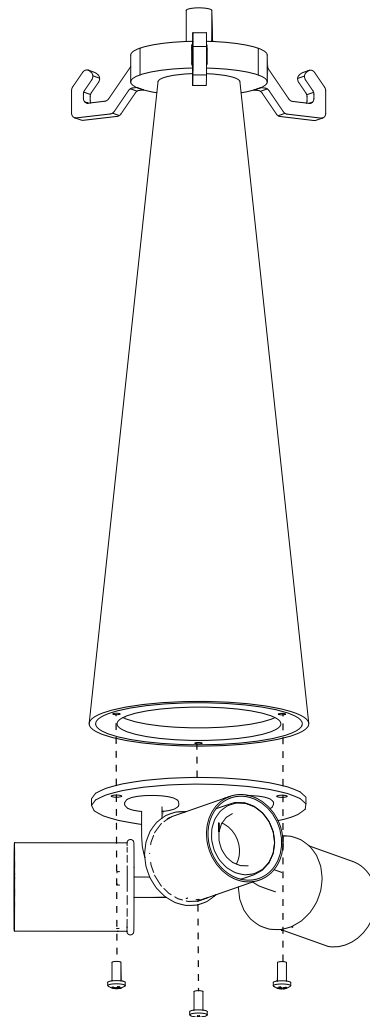




## PLISSE ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2395


### STEP 3

RUN WIRES THROUGH DOWNROD ALLTHREAD AND SHEATH AND ATTACH TO FIXTURE BODY BY APPLYING LOCTITE TO END OF ALLTHREAD AND THREADING INTO COUPLER.

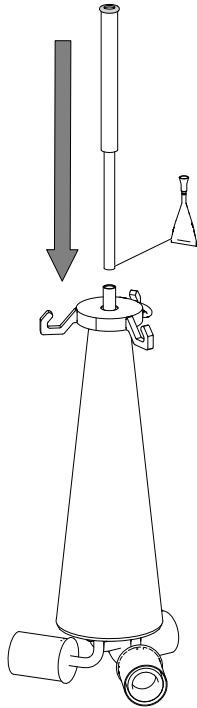


### STEP 4

REMOVE SCREW COLLAR FROM MOUNTING ASSEMBLY.

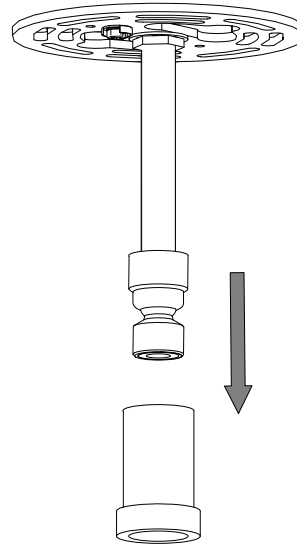


### STEP 5

SLIP SCREW COLLAR AND CANOPY OVER DOWNROD AND ALLOW COMPONENTS TO REST ON FIXTURE BODY. BE CAREFUL NOT TO SCRATCH THE FINISH.

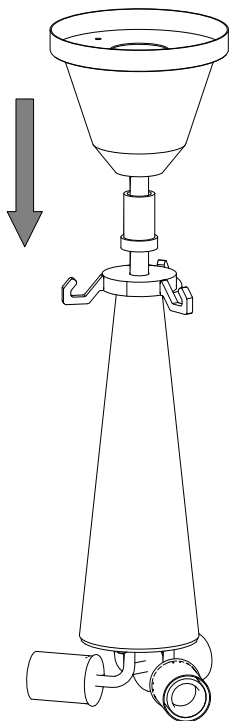

### STEP 6

ATTACH MOUNTING ASSEMBLY TO DOWNROD BY APPLYING LOCTITE AND THREADING INTO HANG STRAIGHT.

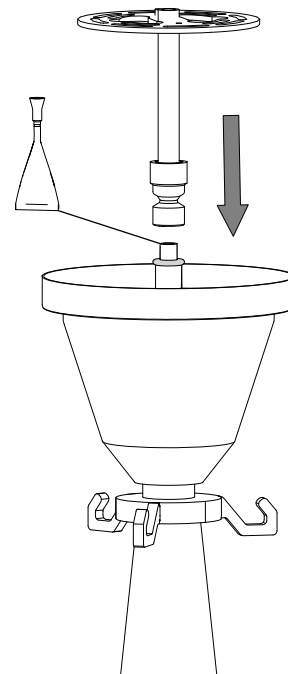




## PLISSE ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2395

### STEP 7


LIFT FIXTURE TO CEILING. ATTACH MOUNTING PLATE TO JUNCTION BOX WITH JUNCTION BOX SCREWS.

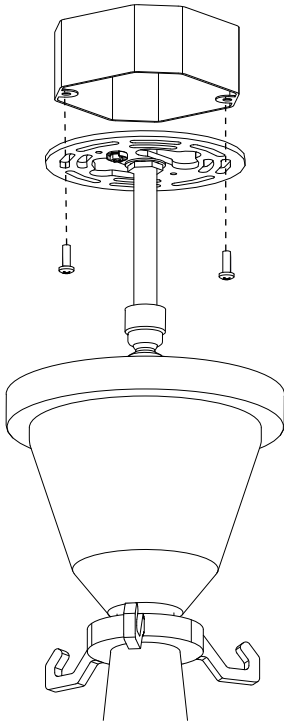

### STEP 8


USING THE WIRE NUTS PROVIDED, MAKE ELECTRICAL CONNECTIONS BY FOLLOWING THE ELECTRICAL CONFIGURATION TABLE PROVIDED. ENSURE THAT ALL ELECTRICAL CONNECTIONS ARE WRAPPED WITH UL-LISTED ELECTRICAL TAPE.

INSTALL BULBS. RETURN POWER TO CIRCUIT. CONFIRM PROPER OPERATION OF FIXTURE.

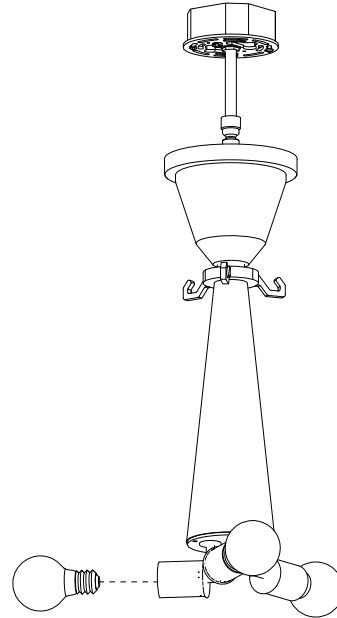


### STEP 9

LIFT CANOPY TO CEILING AND SECURE IN PLACE WITH SCREW COLLAR.

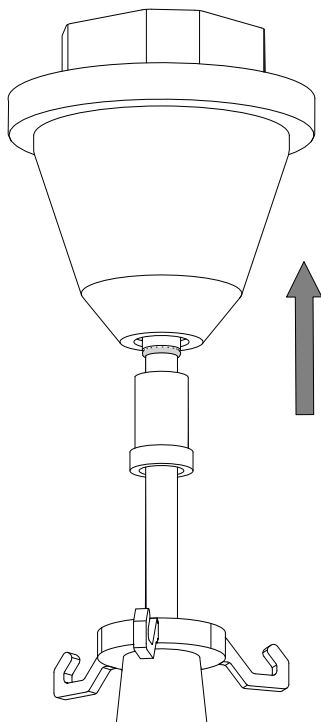

### STEP 10

THREAD ONE END OF CHAIN THROUGH ONE HOLE IN RING FROM THE INSIDE. SKIP ONE HOLE THEN THREAD THE CHAIN BACK THROUGH THE NEXT HOLE. CONNECT END OF CHAIN TO TOP RING.

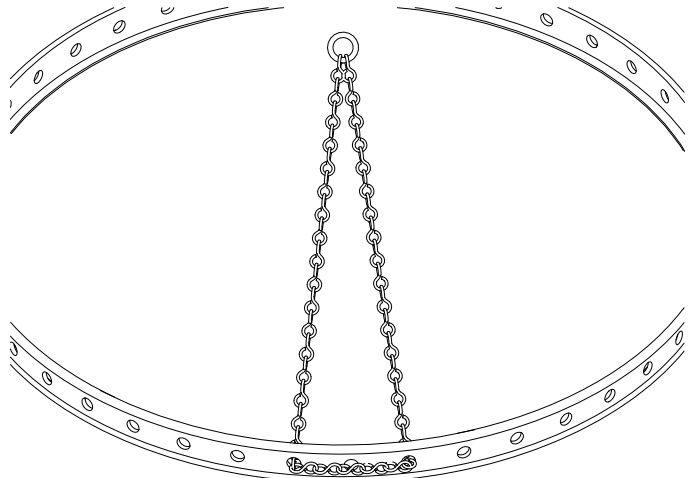




## PLISSE ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2395


### STEP 11

SKIP 11 HOLES AND REPEAT STEP 9 FOR THE REMAINING 2 CHAINS.

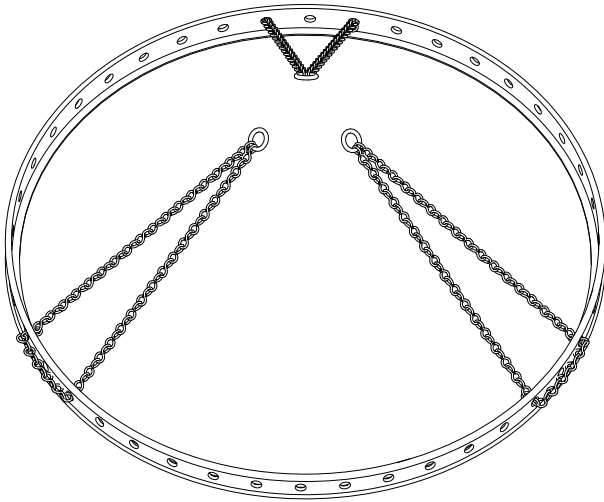


### STEP 12

UNSCREW PLATE ASSEMBLY FROM FINIAL BASE.

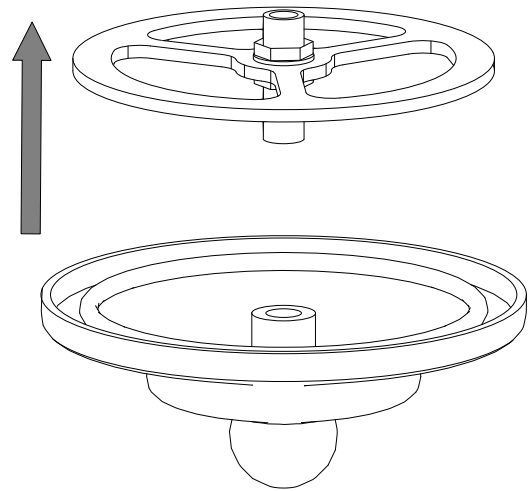


### STEP 13

ATTACH FINIAL ASSEMBLY TO SHADE BY REATTACHING PLATE ASSEMBLY FROM INSIDE OF SHADE TO BASE.

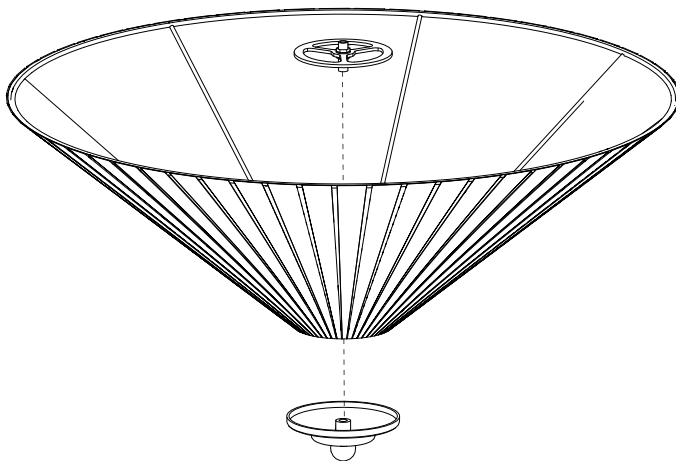

### STEP 14

DROP SHADE INTO RING.

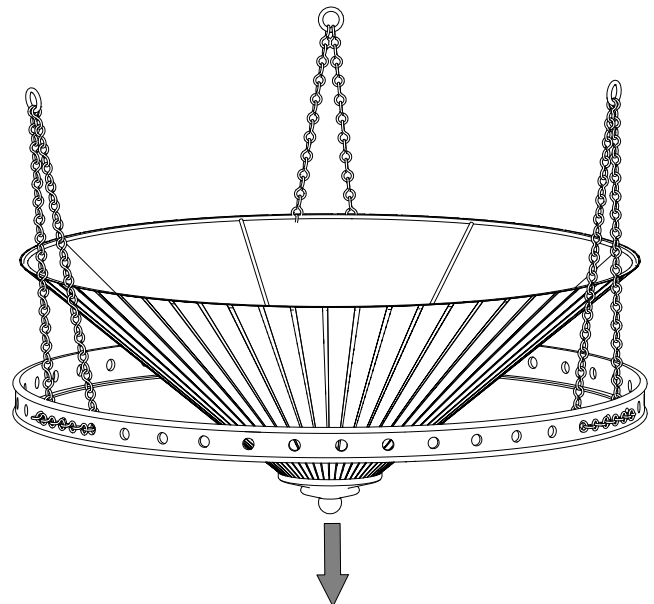




## PLISSE ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2395

### STEP 15

LIFT SHADE ASSEMBLY TO FIXTURE AND ATTACH BY LOOPING TOP CHAIN RINGS OVER HOOKS ON FIXTURE BODY. DO NOT TWIST CHAINS.

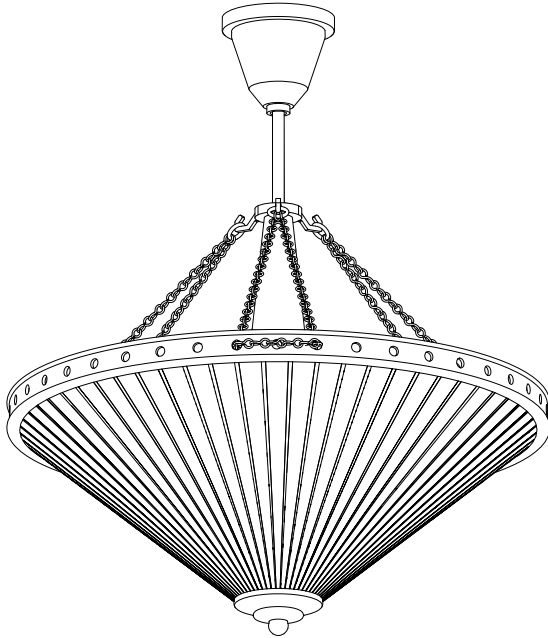

### ELECTRICAL CONFIGURATION TABLE

FROM HOME	FROM LUMINAIRE
CONNECT BLACK OR RED (HOT) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE ROUND/BLACK WIRE (HOT)
CONNECT WHITE (NEUTRAL) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE RIBBED/WHITE WIRE (NEUTRAL)
CONNECT GREEN INSULATED OR BARE COPPER (GROUND -) HOUSE SUPPLY CIRCUIT WIRE AND LUMINAIRE BARE STRANDED WIRE (GROUND -) TO GREEN GROUND SCREW ON CROSSBAR.	

**GENERAL NOTE:** USE UL LISTED WIRE NUTS FOR THE WIRING CONNECTIONS IN THIS LUMINAIRE. WRAP WIRE NUT CONNECTIONS WITH UL LISTED ELECTRICAL TAPE.

FOR QUESTIONS, PLEASE CONTACT CLIENT SERVICES AT:

843.723.8140 OR [INFO@URBANELECTRICCO.COM](mailto:INFO@URBANELECTRICCO.COM)