



REGINA, WR - FRAME VERSION

ASSEMBLY AND MOUNTING INSTRUCTIONS

KF-2513WR

GENERAL NOTES

- CAREFULLY UNPACK THE LUMINAIRE AND INSPECT FOR DAMAGE.
- PLEASE WEAR GLOVES TO PROTECT THE FINISH OF THE FIXTURE.
- SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

NOTICE


- FOR YOUR SAFETY AND PROPER OPERATION OF LUMINAIRE, READ AND UNDERSTAND ALL INSTRUCTIONS COMPLETELY BEFORE COMMENCING INSTALLATION OF THIS LUMINAIRE.
- THIS LUMINAIRE IS SUITED FOR DAMP LOCATIONS.
- THIS LUMINAIRE IS UL LISTED. WHEN INSTALLING LUMINAIRE, CONFORM TO ALL APPLICABLE LOCAL ELECTRICAL CODES, ORDINANCES, AND THE NATIONAL ELECTRICAL CODE (NEC).
- THIS PRODUCT IS RATED FOR ONE 60W MAX, TYPE A BULB.

CAUTION

THIS PRODUCT SHOULD BE INSTALLED ONLY BY A LICENSED ELECTRICIAN.

WARNING

THE ELECTRICITY MUST BE TURNED OFF AT THE MAIN FUSE BOX BEFORE INSTALLING THIS LUMINAIRE. TURNING POWER OFF USING THE LIGHT SWITCH MAY NOT BE SUFFICIENT TO PREVENT ELECTRICAL SHOCK.

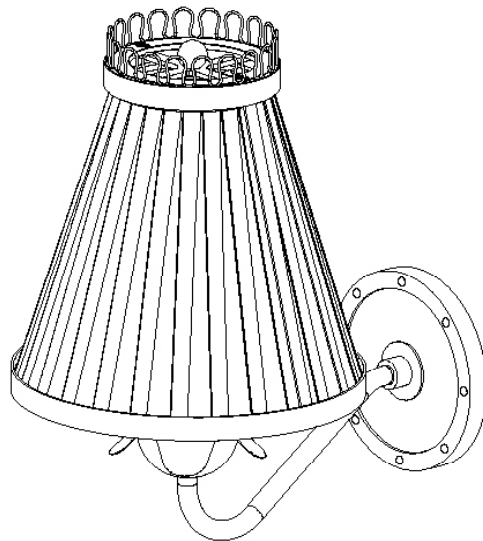

COMPONENTS PROVIDED FOR INSTALLATION

BOX 1

FIXTURE ASSEMBLY 		ELECTRICAL ASSEMBLY 		CROWN 	
BULB HARP ASSEMBLY 	FRAME ASSEMBLY 	RING 		FLOWER FINIAL 	BULB
PAN HEAD SCREWS (X2) 	FLAT HEAD SCREWS (X2) 	JUNCTION BOX SCREWS (X2) 	JUNCTION BOX SCREWS (X2) 	HEX WRENCH (X2) 	WIRE NUTS (X2)

BOX 2

SHADE
DIFFUSER



REGINA, WR - FRAME VERSION

ASSEMBLY AND MOUNTING INSTRUCTIONS

KF-2513WR


MOUNTING INSTRUCTIONS - TWO PERSON INSTALL

STEP 1

SHUT OFF THE MAIN ELECTRICAL SUPPLY TO THE JUNCTION BOX FROM THE FUSE BOX/CIRCUIT BREAKER. TURNING POWER OFF AT THE SWITCH IS NOT SUFFICIENT.

STEP 2


USE HEX WRENCH TO LOOSEN SET SCREW FROM BACKPLATE TO REMOVE MOUNTING PLATE FROM FIXTURE ASSEMBLY.

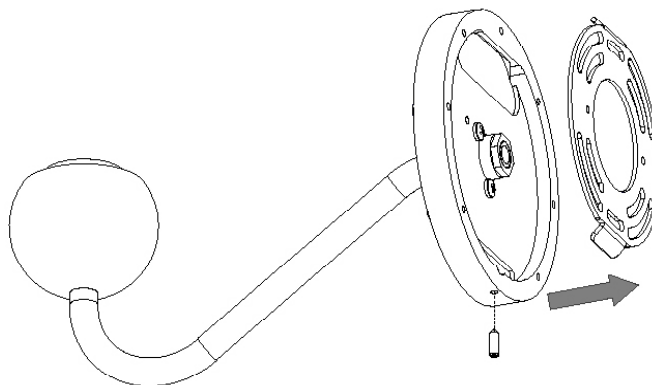

STEP 3

PULL HOUSE SUPPLY CIRCUIT WIRING THROUGH WIREWAY OF MOUNTING PLATE.

ATTACH MOUNTING PLATE TO JUNCTION BOX USING JUNCTION BOX SCREWS.

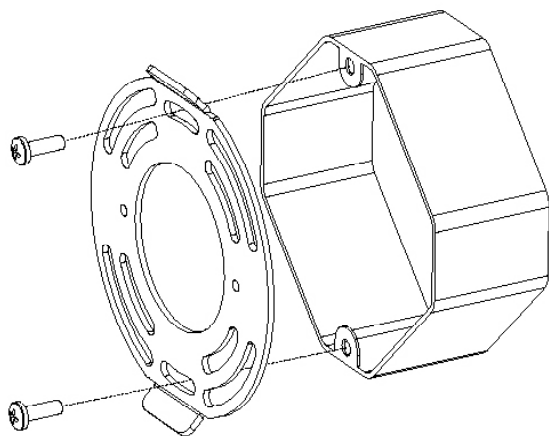

STEP 4

LIFT FIXTURE ASSEMBLY TO WALL.

USING THE WIRE NUTS PROVIDED, MAKE ELECTRICAL CONNECTIONS BY FOLLOWING THE ELECTRICAL CONFIGURATION TABLE BELOW. ENSURE THAT ALL ELECTRICAL CONNECTIONS ARE WRAPPED WITH UL-LISTED ELECTRICAL TAPE.

IMPORTANT: NEVER ALLOW FIXTURE TO “HANG” FROM ELECTRICAL CONNECTIONS OR TO OTHERWISE PUT PRESSURE ON THE CONNECTIONS. THE WEIGHT OF THE FIXTURE SHOULD BE SUPPORTED BY THE MOUNTING ASSEMBLY.




REGINA, WR - FRAME VERSION

ASSEMBLY AND MOUNTING INSTRUCTIONS

KF-2513WR

STEP 5

ATTACH FIXTURE ASSEMBLY TO WALL BY SLIPPING IT OVER MOUNTING PLATE AND TIGHTENING SET SCREW TO SECURE TO WALL.

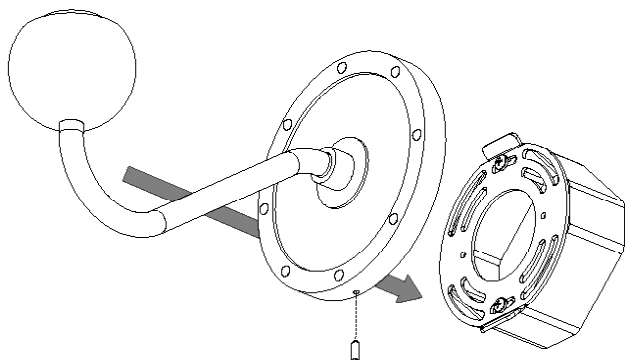


STEP 6

RUN WIRE FROM FIXTURE ASSEMBLY THROUGH FLOWER FINIAL, DIFFUSER, AND BULB HARP ASSEMBLY.

SLIDE FLOWER FINIAL OVER THE FIXTURE BALL.

PLACE DIFFUSER OVER FINIAL ONTO FIXTURE BALL.


ATTACH BULB HARP ASSEMBLY TO FIXTURE BALL BY TIGHTENING SOCKET HEAD SCREWS INSIDE BULB HARP.

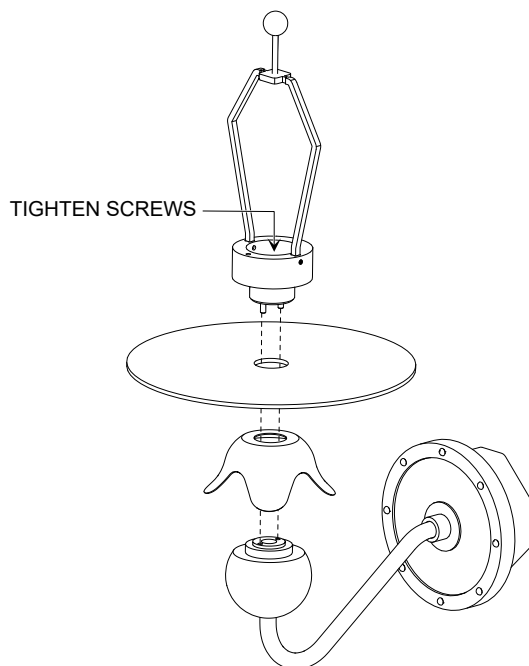

STEP 7


FEED WIRES FROM FIXTURE ASSEMBLY TO ELECTRICAL ASSEMBLY AND MAKE CONNECTIONS.

ATTACH ELECTRICAL ASSEMBLY TO FIXTURE ASSEMBLY USING PAN HEAD SCREWS.

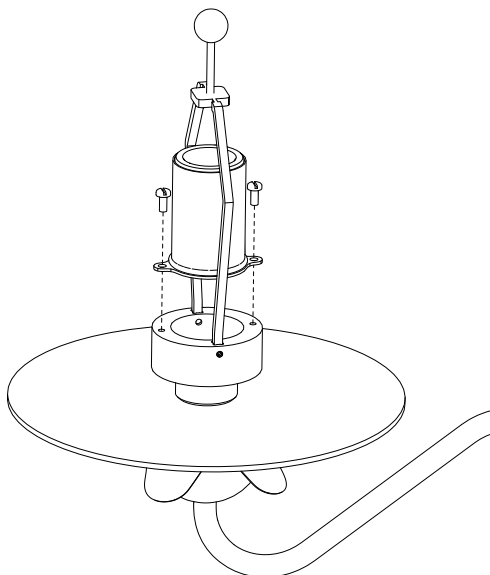

STEP 8

INSTALL THE LIGHT BULB IN THE FIXTURE SOCKET AND RESTORE POWER TO THE CIRCUIT. CONFIRM PROPER OPERATION OF THE LIGHT FIXTURE.

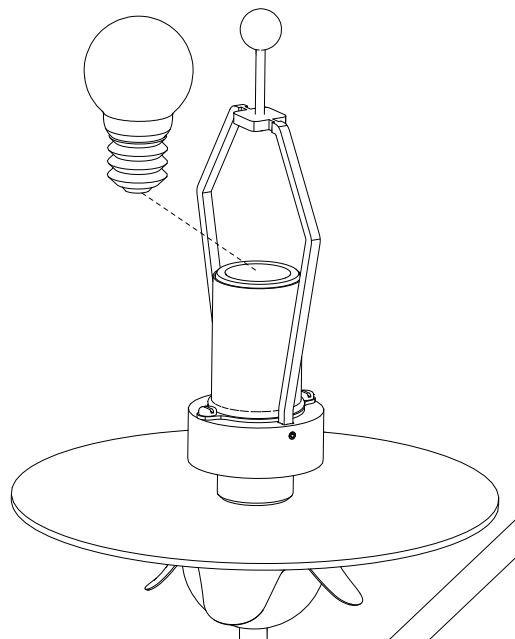




REGINA, WR - FRAME VERSION

ASSEMBLY AND MOUNTING INSTRUCTIONS

KF-2513WR

STEP 9

ATTACH THE CROWN TO THE FRAME ASSEMBLY WITH THE TWO FLAT HEAD SCREWS.

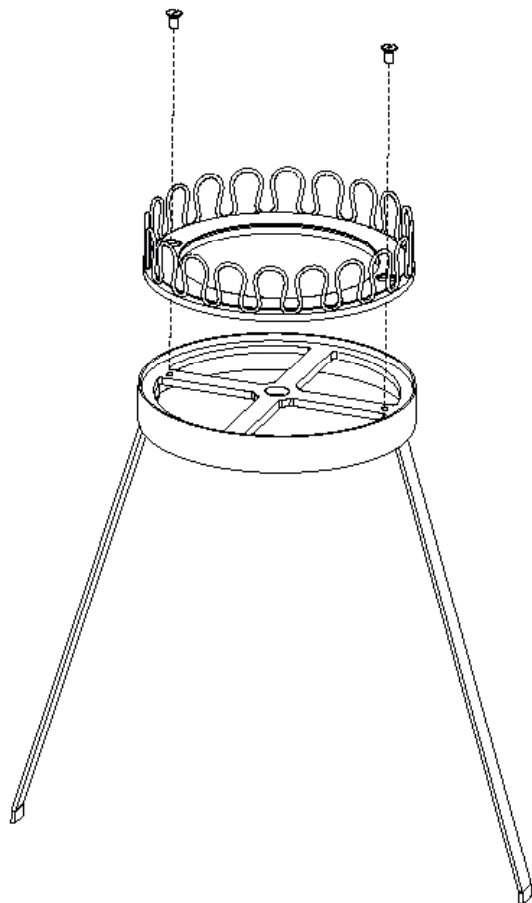


STEP 10

PLACE RING OVER THE DIFFUSER, SHALLOW SIDE DOWN.

REST SHADE ON THE RING.

REMOVE BALL FROM BULB HARP ASSEMBLY. PLACE FRAME ASSEMBLY ONTO THE HARP ASSEMBLY AND SECURE WITH BALL.

THE BOTTOM TABS ON THE FRAME LEGS SHOULD REST INSIDE THE RING.

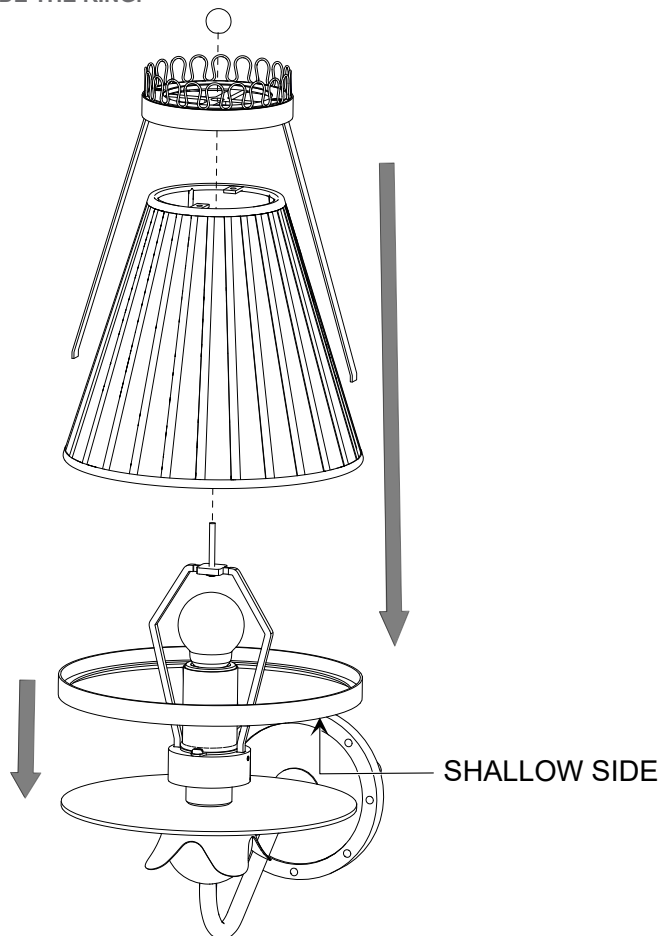

ELECTRICAL CONFIGURATION TABLE

FROM HOME	FROM LUMINAIRE
CONNECT BLACK OR RED (HOT) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE ROUND/BLACK WIRE (HOT)
CONNECT WHITE (NEUTRAL) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE RIBBED/WHITE WIRE (NEUTRAL)
CONNECT GREEN INSULATED OR BARE COPPER (GROUND -) HOUSE SUPPLY CIRCUIT WIRE AND LUMINAIRE BARE STRANDED WIRE (GROUND -) TO GREEN GROUND SCREW ON CROSSBAR.	

GENERAL NOTE: USE UL LISTED WIRE NUTS FOR THE WIRING CONNECTIONS IN THIS LUMINAIRE. WRAP WIRE NUT CONNECTIONS WITH UL LISTED ELECTRICAL TAPE.

FOR QUESTIONS, PLEASE CONTACT CLIENT SERVICES AT: 843.723.8140 OR INFO@URBANELECTRICCO.COM



REGINA, WR - NO FRAME VERSION

ASSEMBLY AND MOUNTING INSTRUCTIONS

KF-2513WR

GENERAL NOTES

- CAREFULLY UNPACK THE LUMINAIRE AND INSPECT FOR DAMAGE.
- PLEASE WEAR GLOVES TO PROTECT THE FINISH OF THE FIXTURE.
- SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

NOTICE


- FOR YOUR SAFETY AND PROPER OPERATION OF LUMINAIRE, READ AND UNDERSTAND ALL INSTRUCTIONS COMPLETELY BEFORE COMMENCING INSTALLATION OF THIS LUMINAIRE.
- THIS LUMINAIRE IS SUITED FOR DAMP LOCATIONS.
- THIS LUMINAIRE IS UL LISTED. WHEN INSTALLING LUMINAIRE, CONFORM TO ALL APPLICABLE LOCAL ELECTRICAL CODES, ORDINANCES, AND THE NATIONAL ELECTRICAL CODE (NEC).
- THIS PRODUCT IS RATED FOR ONE 60W MAX, TYPE A BULB.

CAUTION

THIS PRODUCT SHOULD BE INSTALLED ONLY BY A LICENSED ELECTRICIAN

WARNING

THE ELECTRICITY MUST BE TURNED OFF AT THE MAIN FUSE BOX BEFORE INSTALLING THIS LUMINAIRE. TURNING POWER OFF USING THE LIGHT SWITCH MAY NOT BE SUFFICIENT TO PREVENT ELECTRICAL SHOCK.

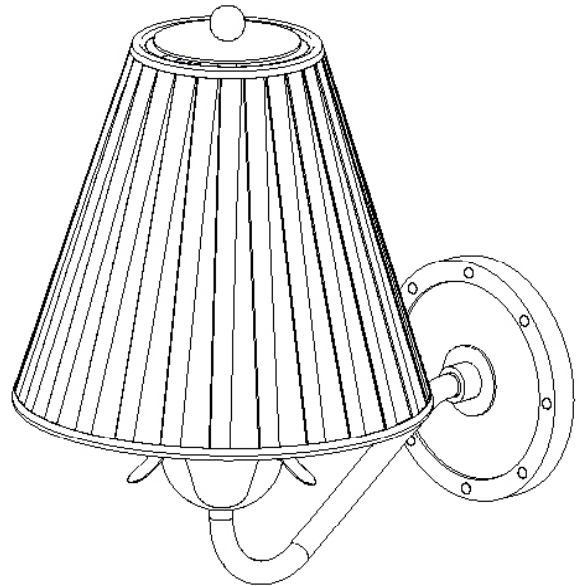

COMPONENTS PROVIDED FOR INSTALLATION

BOX 1

FIXTURE ASSEMBLY		BULB HARP		SHADE BRACKET	BULB
PAN HEAD SCREW (X2)	JUNCTION BOX SCREWS (X2)	JUNCTION BOX SCREWS (X2)	HEX WRENCH (X2)		WIRE NUTS (X2)

BOX 2

SHADE
DIFFUSER



REGINA, WR - NO FRAME VERSION

ASSEMBLY AND MOUNTING INSTRUCTIONS

KF-2513WR


MOUNTING INSTRUCTIONS - TWO PERSON INSTALL

STEP 1

SHUT OFF THE MAIN ELECTRICAL SUPPLY TO THE JUNCTION BOX FROM THE FUSE BOX/CIRCUIT BREAKER. TURNING POWER OFF AT THE SWITCH IS NOT SUFFICIENT.

STEP 2


USE HEX WRENCH TO LOOSEN SET SCREW FROM BACKPLATE TO REMOVE MOUNTING PLATE FROM FIXTURE ASSEMBLY.

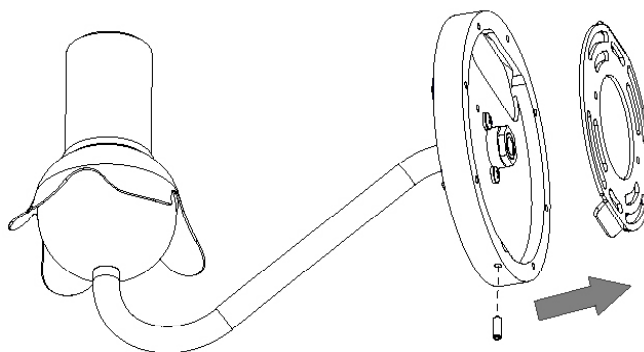

STEP 3

PULL HOUSE SUPPLY CIRCUIT WIRING THROUGH WIREWAY OF MOUNTING PLATE.

ATTACH MOUNTING PLATE TO JUNCTION BOX USING JUNCTION BOX SCREWS.

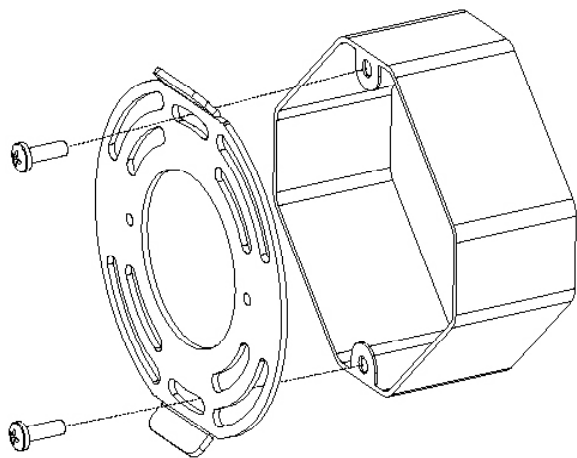

STEP 4

LIFT FIXTURE ASSEMBLY TO WALL.

USING THE WIRE NUTS PROVIDED, MAKE ELECTRICAL CONNECTIONS BY FOLLOWING THE ELECTRICAL CONFIGURATION TABLE BELOW. ENSURE THAT ALL ELECTRICAL CONNECTIONS ARE WRAPPED WITH UL-LISTED ELECTRICAL TAPE.

IMPORTANT: NEVER ALLOW FIXTURE TO "HANG" FROM ELECTRICAL CONNECTIONS OR TO OTHERWISE PUT PRESSURE ON THE CONNECTIONS. THE WEIGHT OF THE FIXTURE SHOULD BE SUPPORTED BY THE MOUNTING ASSEMBLY.




REGINA, WR - NO FRAME VERSION

ASSEMBLY AND MOUNTING INSTRUCTIONS

KF-2513WR

STEP 5

ATTACH FIXTURE ASSEMBLY TO WALL BY SLIPPING IT OVER MOUNTING PLATE AND TIGHTENING SET SCREW TO SECURE TO WALL.

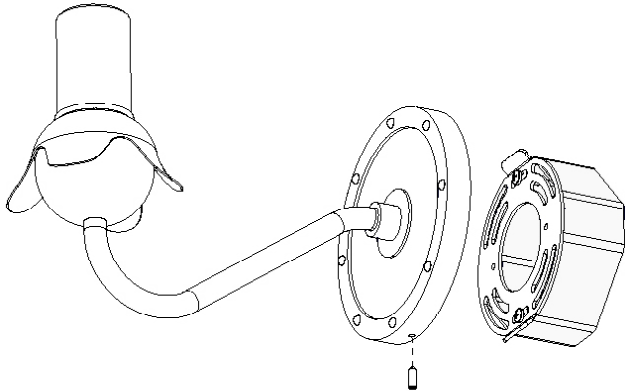


STEP 6

REMOVE BALL FROM TOP OF BULB HARP.


ATTACH BULB HARP TO BULB.

NOTE: THE CLIP ON THE BULB HARP NEEDS TO BE BENT OPEN TO FIT THE BULB, BE CAREFUL TO NOT BREAK BULB.

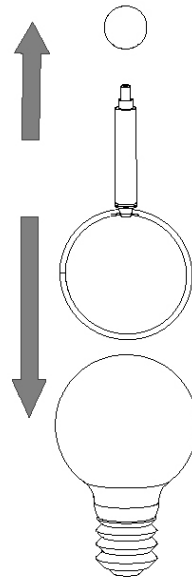


STEP 7

INSTALL THE LIGHT BULBS IN THE FIXTURE SOCKETS AND RESTORE POWER TO THE CIRCUIT. CONFIRM PROPER OPERATION OF THE LIGHT FIXTURE.

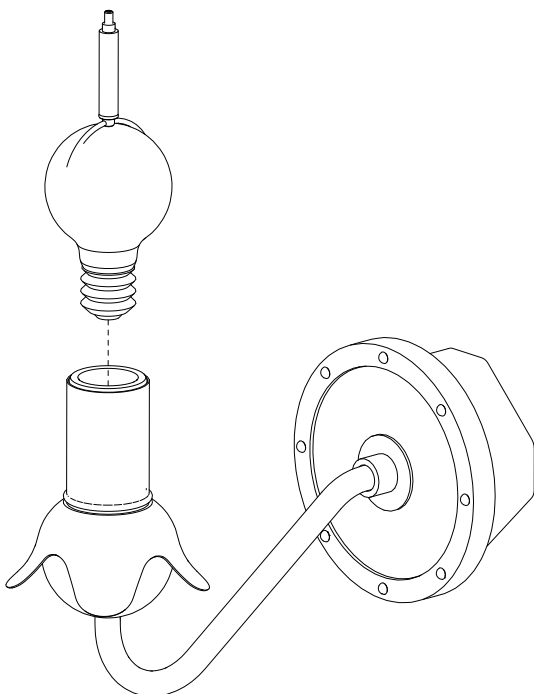

STEP 8

ATTACH SHADE BRACKET INSIDE THE SHADE THREADING TWO PAN HEAD SCREWS UNDERNEATH THE SHADE TABS.

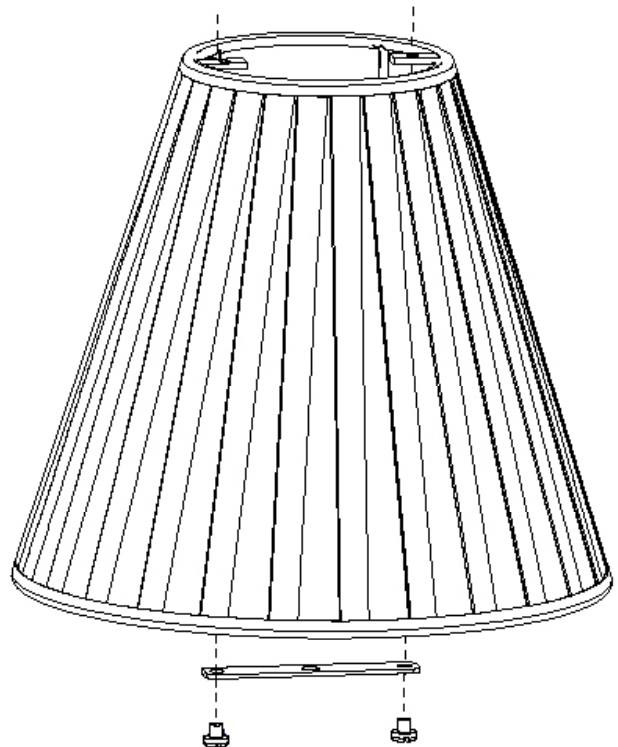



REGINA, WR - NO FRAME VERSION

ASSEMBLY AND MOUNTING INSTRUCTIONS


KF-2513WR

STEP 9

ATTACH SHADE TO TOP OF BULB HARP.

PLACE DIFFUSER ON TOP OF SHADE BRACKET AND BULB HARP.

SECURE BOTH BY REATTACHING BALL.

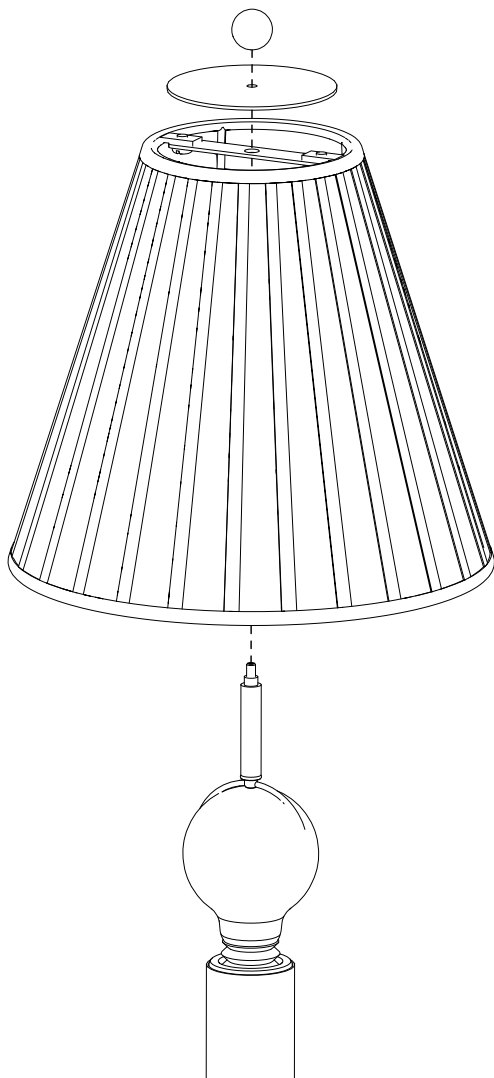

ELECTRICAL CONFIGURATION TABLE

FROM HOME	FROM LUMINAIRE
CONNECT BLACK OR RED (HOT) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE ROUND/BLACK WIRE (HOT)
CONNECT WHITE (NEUTRAL) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE RIBBED/WHITE WIRE (NEUTRAL)
CONNECT GREEN INSULATED OR BARE COPPER (GROUND -) HOUSE SUPPLY CIRCUIT WIRE AND LUMINAIRE BARE STRANDED WIRE (GROUND -) TO GREEN GROUND SCREW ON CROSSBAR.	

GENERAL NOTE: USE UL LISTED WIRE NUTS FOR THE WIRING CONNECTIONS IN THIS LUMINAIRE. WRAP WIRE NUT CONNECTIONS WITH UL LISTED ELECTRICAL TAPE.

FOR QUESTIONS, PLEASE CONTACT CLIENT SERVICES AT: 843.723.8140 OR INFO@URBANELECTRICCO.COM