



REX BAR MOUNT-SOFTWIRED ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2456

GENERAL NOTES


- THIS LUMINAIRE IS SUITED FOR DAMP LOCATIONS.
- MINIMUM SIZE HOLE FOR FIXTURE PLUG IS 1.5" DIAMETER
- BAR TOP SHOULD BE NO THINNER THAT 1.5" – MAX THICKNESS SHOULD NOT EXCEED 3"
- WHEN INSTALLING LUMINAIRE, CONFORM TO ALL APPLICABLE LOCAL ELECTRICAL CODES, ORDINANCES, AND THE NATIONAL ELECTRICAL CODE (NEC).
- FOR YOUR SAFETY AND PROPER OPERATION OF LUMINAIRE, READ AND UNDERSTAND ALL INSTRUCTIONS COMPLETELY BEFORE COMMENCING INSTALLATION OF THIS PORTABLE LUMINAIRE.
- CAREFULLY UNPACK THE LUMINAIRE AND INSPECT FOR DAMAGE.
- THIS PRODUCT IS RATED FOR ONE 60W MAX, TYPE A BULB.
- THIS PRODUCT IS UL CERTIFIED.
- SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

CAUTION






- THIS PRODUCT SHOULD BE INSTALLED ONLY BY A LICENSED ELECTRICIAN.

WARNING

THE ELECTRICITY MUST BE TURNED OFF AT THE MAIN FUSE BOX BEFORE INSTALLING THIS LUMINAIRE. TURNING POWER OFF USING THE LIGHT SWITCH MAY NOT BE SUFFICIENT TO PREVENT ELECTRICAL SHOCK.

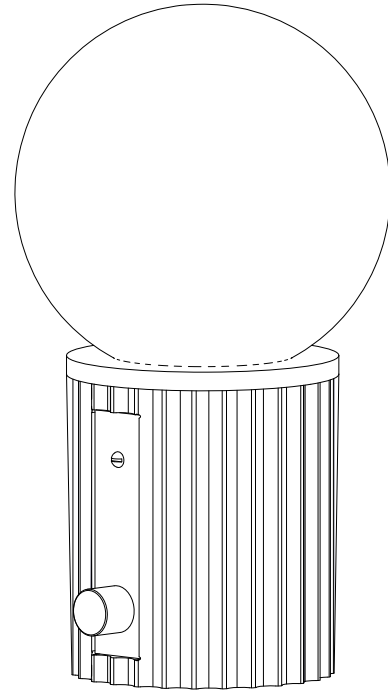

COMPONENTS PROVIDED FOR INSTALLATION

FIXTURE BODY	GLASS GLOBE	ATTACHMENT PLATE	BULB
			
HEX WRENCH			
			



REX BAR MOUNT-SOFTWIRED ASSEMBLY AND MOUNTING INSTRUCTIONS


UE-2456

MOUNTING INSTRUCTIONS – ONE PERSON INSTALL

STEP 1


DRILL HOLE IN BAR TOP FOR ELECTRICAL PLUG (MINIMUM DIAMETER = 1.5")

SLIP PLUG, CORD, AND FIXTURE BASE THROUGH HOLE.

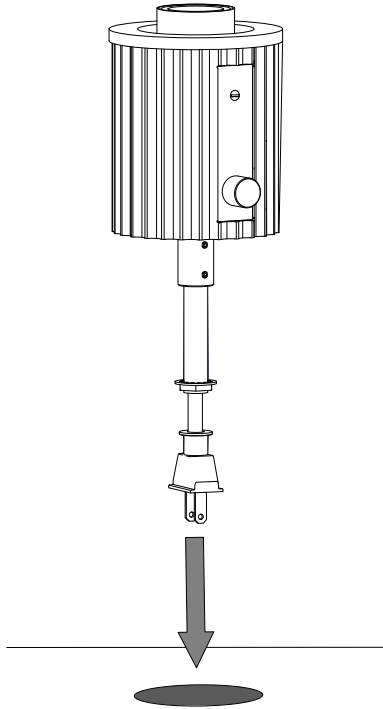


STEP 2

FROM UNDERNEATH BAR, SLIP ATTACHMENT PLATE AROUND FIXTURE BASE. TIGHTEN HEX NUT AND WASHER UNDER ATTACHMENT PLATE SO THAT EVERYTHING IS SNUG TO BAR TOP.

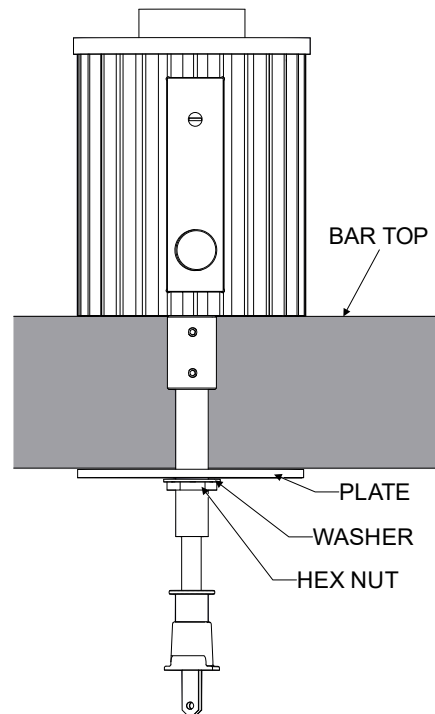


STEP 3

INSTALL BULB AND PLUG IN FIXTURE. CONFIRM PROPER OPERATION.

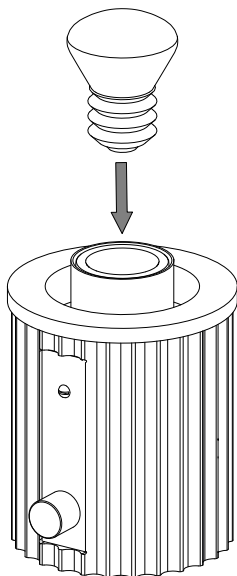

STEP 4

UNTHREAD TOP RING FROM FIXTURE BODY.

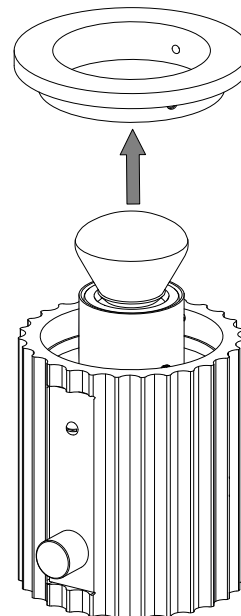




REX BAR MOUNT-SOFTWIRED ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2456


STEP 5

SLIDE TOP RING AROUND GLOBE COLLAR. TIGHTEN 3 SET SCREWS IN RING EVENLY WITH PROVIDED HEX WRENCH TO SECURE GLOBE IN PLACE.

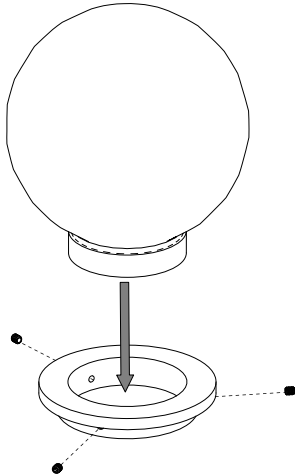

STEP 6

CAREFULLY INSTALL GLASS GLOBE ASSEMBLY INTO FIXTURE.

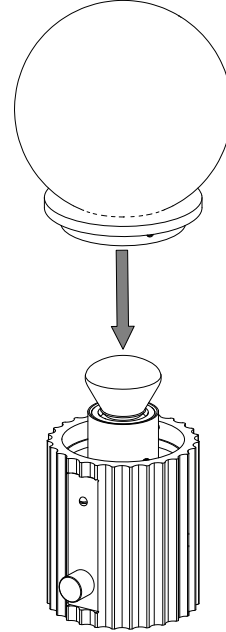

ELECTRICAL CONFIGURATION TABLE

FROM HOME	FROM LUMINAIRE
CONNECT BLACK OR RED (HOT) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE ROUND/BLACK WIRE (HOT)
CONNECT WHITE (NEUTRAL) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE RIBBED/WHITE WIRE (NEUTRAL)
CONNECT GREEN INSULATED OR BARE COPPER (GROUND -) HOUSE SUPPLY CIRCUIT WIRE AND LUMINAIRE BARE STRANDED WIRE (GROUND -) TO GREEN GROUND SCREW ON CROSSBAR.	

GENERAL NOTE: USE UL LISTED WIRE NUTS FOR THE WIRING CONNECTIONS IN THIS LUMINAIRE. WRAP WIRE NUT CONNECTIONS WITH UL LISTED ELECTRICAL TAPE.

FOR QUESTIONS, PLEASE CONTACT CLIENT SERVICES AT:

843.723.8140 OR INFO@URBANELECTRICCO.COM