



# ROSAMUND

## ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2462HR

### GENERAL NOTES


- THIS LUMINAIRE IS SUITED FOR DAMP LOCATIONS.
- THIS LUMINAIRE IS UL LISTED. WHEN INSTALLING LUMINAIRE, CONFORM TO ALL APPLICABLE LOCAL ELECTRICAL CODES, ORDINANCES, AND THE NATIONAL ELECTRICAL CODE (NEC).
- FOR YOUR SAFETY AND PROPER OPERATION OF LUMINAIRE, READ AND UNDERSTAND ALL INSTRUCTIONS COMPLETELY BEFORE COMMENCING INSTALLATION OF THIS LUMINAIRE.
- CAREFULLY UNPACK THE LUMINAIRE AND INSPECT FOR DAMAGE.
- THIS PRODUCT IS RATED FOR THREE 60W MAX, TYPE B BULBS.
- SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

### CAUTION

- THIS PRODUCT SHOULD BE INSTALLED ONLY BY A LICENSED ELECTRICIAN.

### WARNING

THE ELECTRICITY MUST BE TURNED OFF AT THE MAIN FUSE BOX BEFORE INSTALLING THIS LUMINAIRE. TURNING POWER OFF USING THE LIGHT SWITCH MAY NOT BE SUFFICIENT TO PREVENT ELECTRICAL SHOCK.

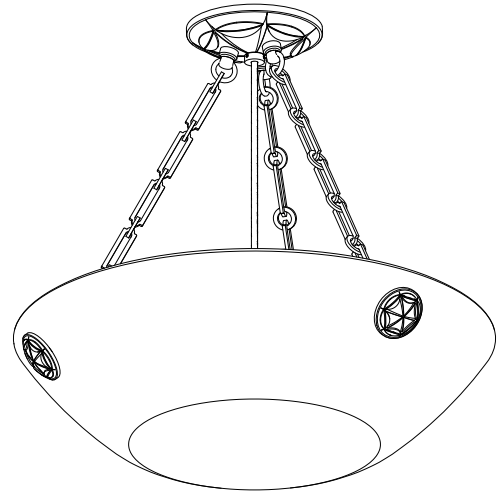

### COMPONENTS PROVIDED FOR INSTALLATION

ELECTRICAL	CANOPY	ROSETTE (X3)	CHAIN	GLASS DIFFUSER	GLASS BOWL
CHECK RINGS (X3)	MOUNTING PLATE	BULB	WIRE NUTS (2X)	HEX WRENCH	JUNCTION BOX SCREWS (X2)



# ROSAMUND

## ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2462HR


### MOUNTING INSTRUCTIONS – 2 PERSON INSTALLATION

#### STEP 1

SHUT OFF THE MAIN ELECTRICAL SUPPLY TO THE JUNCTION BOX FROM THE FUSE BOX/CIRCUIT BREAKER. TURNING POWER OFF AT THE SWITCH IS NOT SUFFICIENT.


#### STEP 2

UNSCREW PAN HEAD SCREWS FROM ELECTRICAL AND REMOVE PLATE

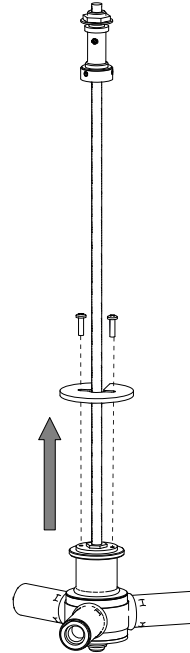


#### STEP 3

SLIDE GLASS DIFFUSER DOWN ELECTRICAL WIRE AND LET REST ON TOP OF ELECTRICAL CLUSTER. SECURE IN PLACE BY REATTACHING PLATE AND PAN HEAD SCREWS.

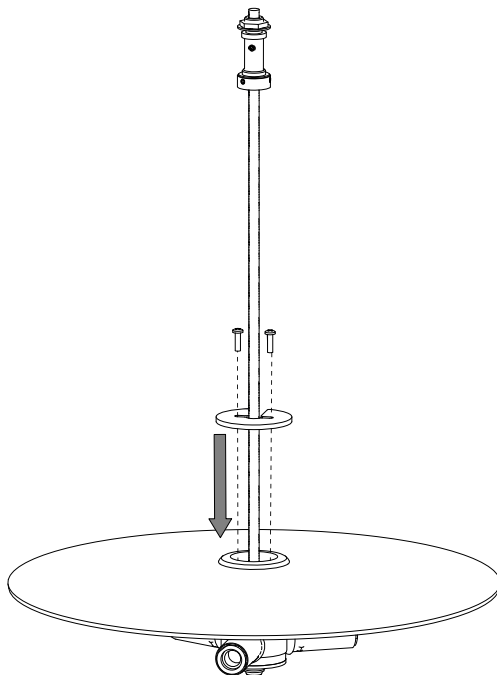

#### STEP 4

LOOSEN SET SCREWS IN SCREW COLLAR AND SLIDE DOWN WIRE TO REST ON PLATE. REMOVE LOCK NUT AND WASHER AND SET ASIDE.

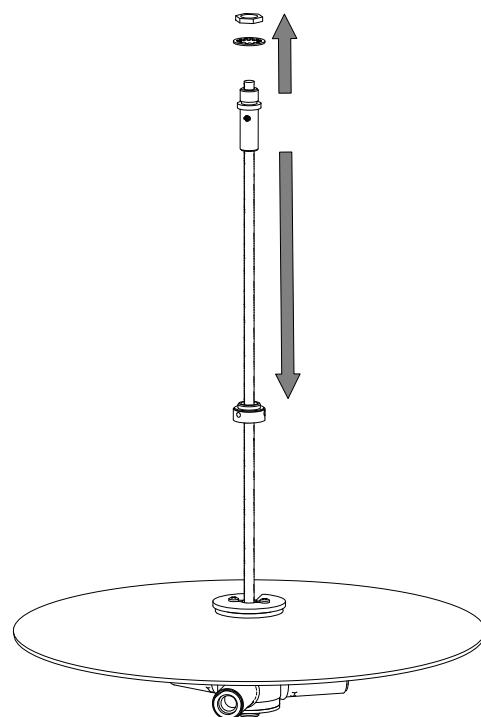




# ROSAMUND ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2462HR

## STEP 5


REMOVE HEX NUTS FROM CHAIN LOOPS. SLIP THREADS OF CHAIN LOOPS THROUGH HOLES IN CANOPY AND REATTACH HEX NUTS.

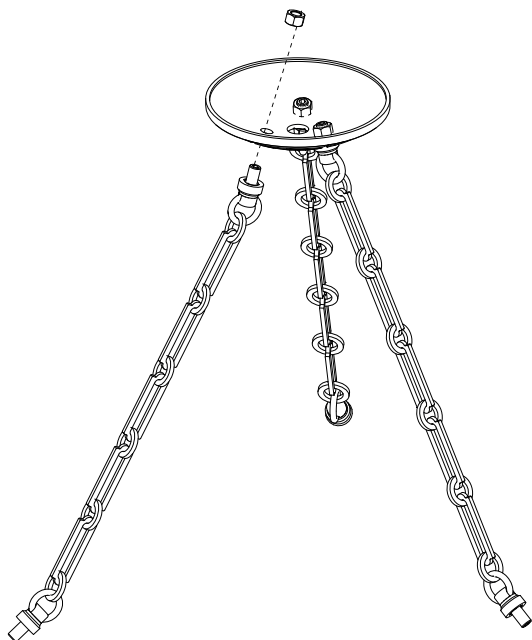

## STEP 6


SLIP CANOPY ASSEMBLY DOWN LENGTH OF WIRE AND LET REST ON SCREW COLLAR. **BE CAREFUL TO NOT LET CHAINS DAMAGE GLASS DIFFUSER.**

ATTACH MOUNTING PLATE TO TOP NIP WITH WASHER AND LOCKNUT.

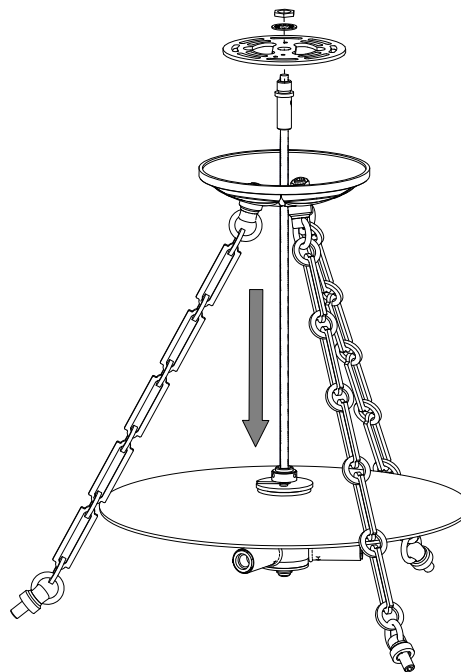

## STEP 7

LIFT ELECTRICAL ASSEMBLY TO CEILING AND ATTACH MOUNTING PLATE TO JUNCTION BOX WITH JUNCTION BOX SCREWS.

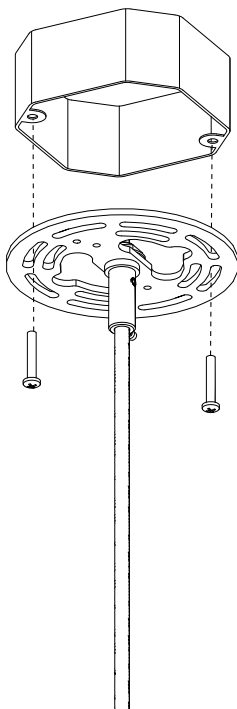

## STEP 8

USING THE WIRE NUTS PROVIDED, MAKE ELECTRICAL CONNECTIONS BY FOLLOWING THE ELECTRICAL CONFIGURATION TABLE BELOW. ENSURE THAT ALL ELECTRICAL CONNECTIONS ARE WRAPPED WITH UL-LISTED ELECTRICAL TAPE.

**IMPORTANT: NEVER ALLOW FIXTURE TO "HANG" FROM ELECTRICAL CONNECTIONS OR TO OTHERWISE PUT PRESSURE ON THE CONNECTIONS. THE WEIGHT OF THE FIXTURE SHOULD BE SUPPORTED BY THE DOWNROD AND CROSSBAR ASSEMBLY.**




## ROSAMUND ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2462HR

### STEP 9


LIFT CANOPY ASSEMBLY AND SCREW COLLAR TO CEILING  
SECURE IN PLACE BY TIGHTENING SET SCREWS.

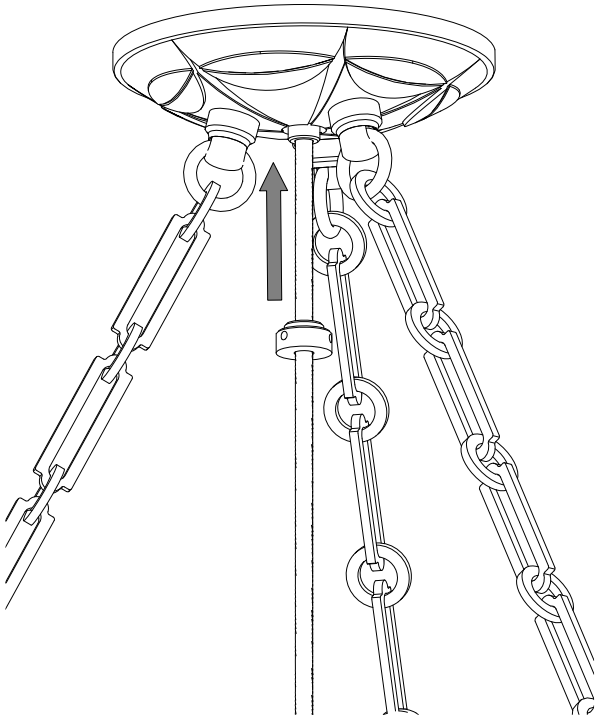

### STEP 10


INSTALL THE BULBS IN THE FIXTURE AND RESTORE POWER  
TO THE CIRCUIT.

CONFIRM PROPER OPERATION OF THE LIGHT FIXTURE.

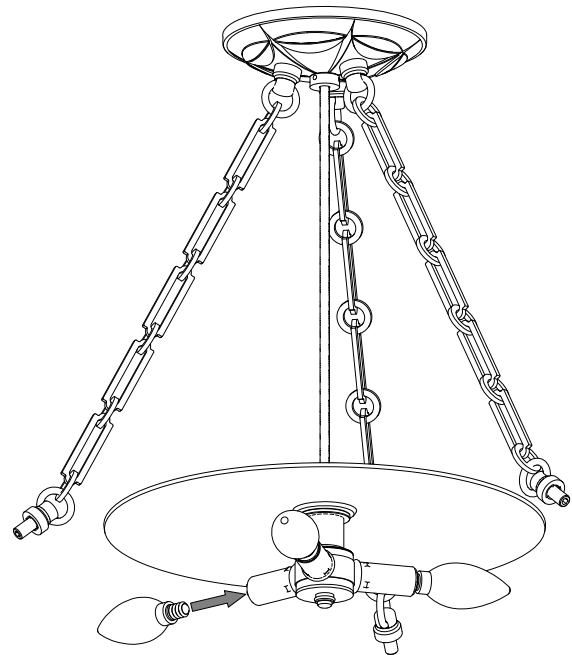

### STEP 11

LIFT GLASS BOWL TO FIXTURE ASSEMBLY. SLIP CHECK  
RING OVER CHAIN LOOP THREADS AND GUIDE THREADS  
THROUGH HOLE IN SIDE OF BOWL. SCREW ROSETTE ONTO  
THREAD FROM OUTSIDE OF BOWL. DO NOT OVER TIGHTEN.  
REPEAT FOR ALL CHAIN LENGTHS.

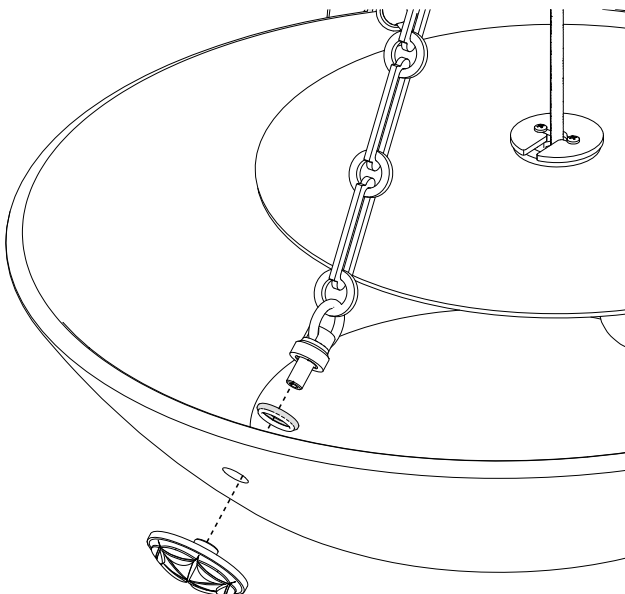



# ROSAMUND

## ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2462HR

### ELECTRICAL CONFIGURATION TABLE

FROM HOME	FROM LUMINAIRE
CONNECT BLACK OR RED (HOT) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE ROUND/BLACK WIRE (HOT)
CONNECT WHITE (NEUTRAL) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE RIBBED/WHITE WIRE (NEUTRAL)
CONNECT GREEN INSULATED OR BARE COPPER (GROUND -) HOUSE SUPPLY CIRCUIT WIRE TO LUMINAIRE BARE STRANDED WIRE (GROUND -).	

**GENERAL NOTE:** USE UL LISTED WIRE NUTS FOR THE WIRING CONNECTIONS IN THIS LUMINAIRE. WRAP WIRE NUT CONNECTIONS WITH UL LISTED ELECTRICAL TAPE.

FOR QUESTIONS, PLEASE CONTACT CLIENT SERVICES AT:  
843.723.8140 OR [INFO@URBANELECTRICCO.COM](mailto:INFO@URBANELECTRICCO.COM)