



# STAMFORD TRIPLE

## ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2428

### GENERAL NOTES


- THIS LUMINAIRE IS SUITED FOR DAMP LOCATIONS.
- THIS LUMINAIRE IS UL LISTED. WHEN INSTALLING LUMINAIRE, CONFORM TO ALL APPLICABLE LOCAL ELECTRICAL CODES, ORDINANCES, AND THE NATIONAL ELECTRICAL CODE (NEC).
- FOR YOUR SAFETY AND PROPER OPERATION OF LUMINAIRE, READ AND UNDERSTAND ALL INSTRUCTIONS COMPLETELY BEFORE COMMENCING INSTALLATION OF THIS LUMINAIRE.
- CAREFULLY UNPACK THE LUMINAIRE AND INSPECT FOR DAMAGE.
- THIS PRODUCT IS RATED FOR THREE 60W MAX, TYPE A BULBS.
- SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

#### CAUTION

- THIS PRODUCT SHOULD BE INSTALLED ONLY BY A LICENSED ELECTRICIAN. PLEASE WEAR GLOVES TO PROTECT THE FINISH OF THE FIXTURE

#### WARNING

THE ELECTRICITY MUST BE TURNED OFF AT THE MAIN FUSE BOX BEFORE INSTALLING THIS LUMINAIRE. TURNING POWER OFF USING THE LIGHT SWITCH MAY NOT BE SUFFICIENT TO PREVENT ELECTRICAL SHOCK.

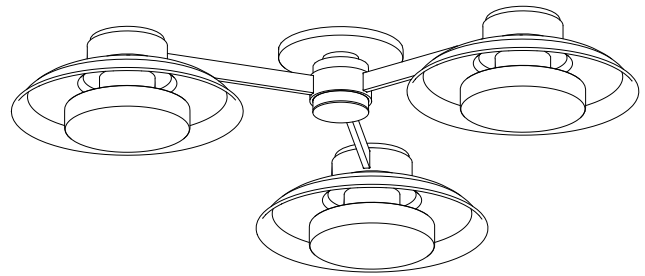

### COMPONENTS PROVIDED FOR INSTALLATION

FIXTURE BODY		METAL SHADE (X3)		SHADE CUP (X3)	GLASS (X3)
WIRE NUTS (X2)	U-BOLT (X2)	WASHER (X3)	TOGGLE BOLT (3X)	WIRING HARNESS	BULB (3X)



# STAMFORD TRIPLE

## ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2428


### MOUNTING INSTRUCTIONS – 3 PERSON INSTALL

#### STEP 1

SHUT OFF MAIN ELECTRICAL SUPPLY TO JUNCTION BOX FROM FUSE BOX/CIRCUIT BREAKER. TURNING POWER OFF AT SWITCH IS NOT SUFFICIENT.


#### STEP 2

UNTHREAD BOTTOM CAP FROM FIXTURE BODY. REMOVE THREE EXTENDED NUTS FROM INTERIOR.

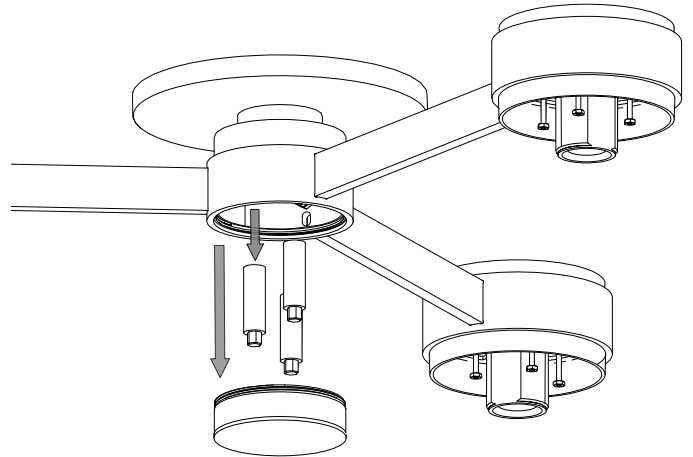

#### STEP 3


LIFT MOUNTING ASSEMBLY FROM FIXTURE BODY, BUT LEAVE THE CABLES CONNECTED. RAISE TO CEILING AND MARK HOLES FOR TOGGLE BOLTS. DRILL HOLES.

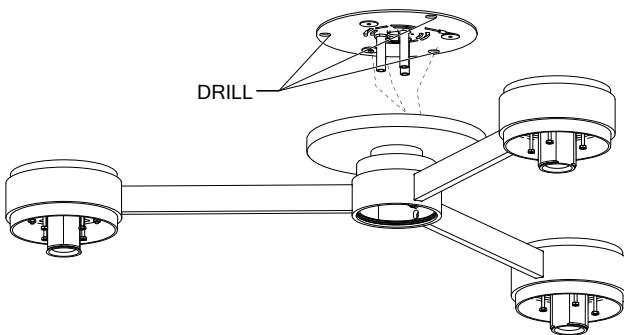

#### STEP 4

RAISE FIXTURE TO CEILING AND ATTACH MOUNTING PLATE TO JUNCTION BOX WITH JUNCTION BOX SCREWS AND TO CEILING WITH TOGGLE BOLTS AND WASHERS.

LET FIXTURE HANG FROM CABLES FOR NEXT STEPS.

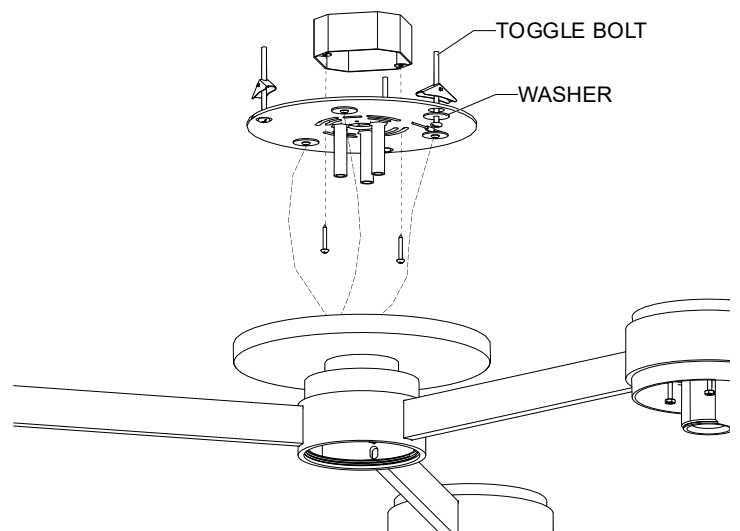




## STAMFORD TRIPLE ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2428

### STEP 5

IF USING SAFETY CABLE, ATTACH TO MOUNTING PLATE AND A SECURED BUILDING STRUCTURE SEPARATE FROM THE JUNCTION BOX USING U-BOLTS PROVIDED. **DO NOT ATTACH TO JUNCTION BOX.**

BE SURE THE U-BOLTS ARE TIGHT AND THE SAFETY CABLE HAS LITTLE TO NO SLACK.

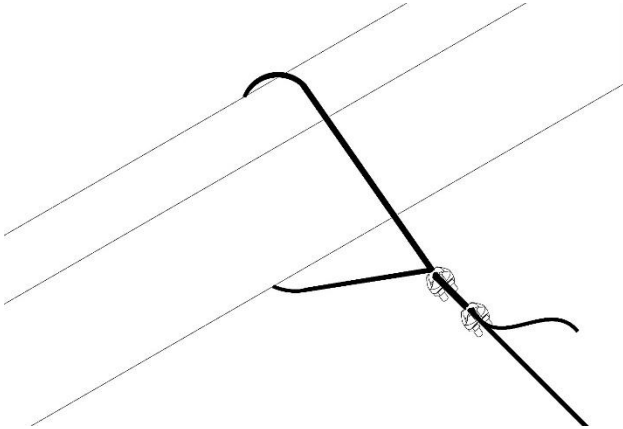


### STEP 6

USING WIRE NUTS PROVIDED, MAKE ELECTRICAL CONNECTIONS FROM HOUSE SUPPLY TO WIRING HARNESS BY FOLLOWING ELECTRICAL CONFIGURATION TABLE BELOW.

ALSO CONNECT GROUND TO GROUNDING HARNESS.


SLIP FERRULE END OF WIRING HARNESS THROUGH CANOPY AND ATTACH TO WIRE TERMINALS IN CENTER OF FIXTURE BODY.

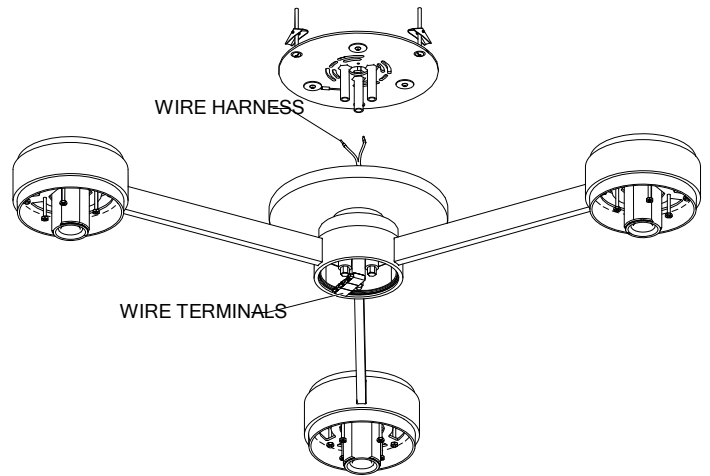

### STEP 7


LIFT FIXTURE BODY TO CEILING AND SECURE BY THREADING THREE EXTENDED NUTS TO THREADS IN MOUNTING PLATE.

THREAD BOTTOM CAP BACK ONTO FIXTURE BODY.

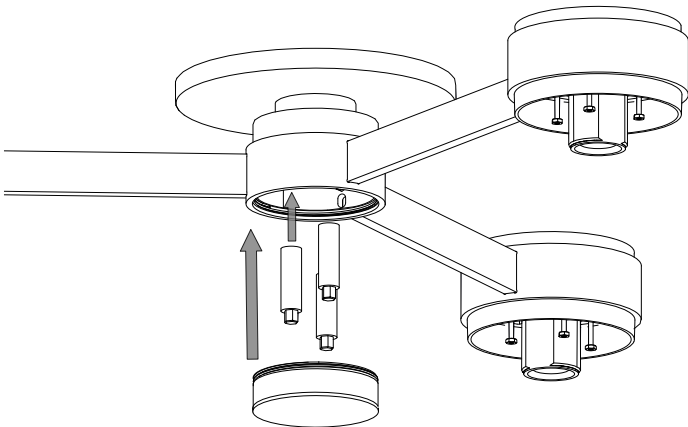

### STEP 8

REMOVE 4 HEX NUTS FROM THE POSTS INSIDE EACH OF THE 3 ARMS AND SET ASIDE

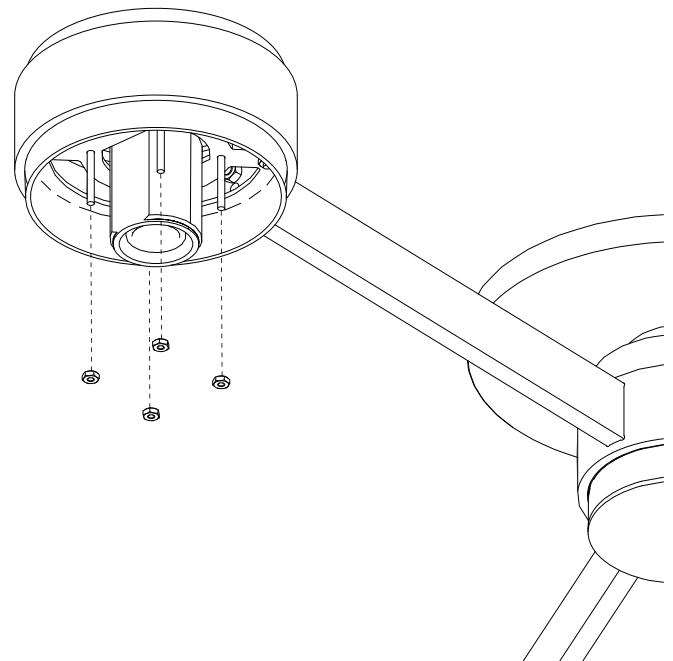




## STAMFORD TRIPLE

### ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2428


#### STEP 9

ALIGN METAL SHADES AND SHADE CUPS ON ARMS AND REATTACH HEX NUTS TO SECURE IN PLACE.

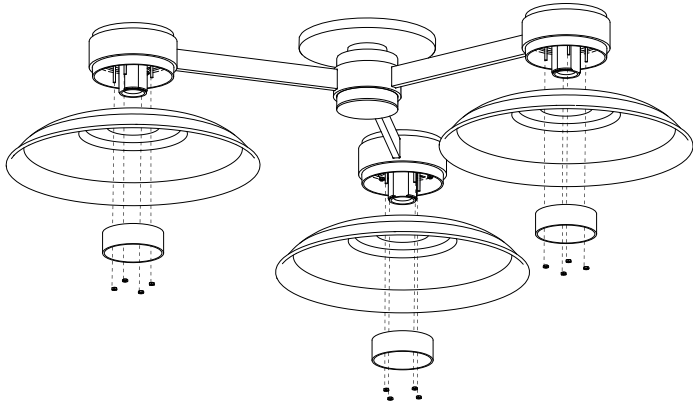


#### STEP 10

INSTALL BULBS

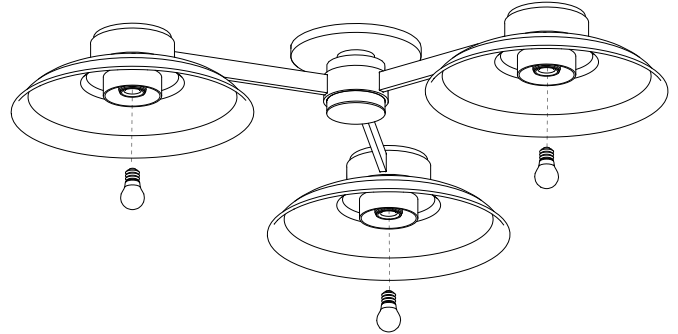

#### STEP 11

THREAD GLASS ASSEMBLIES ONTO THREADED SHOULDERS INSIDE SHADE CUPS.

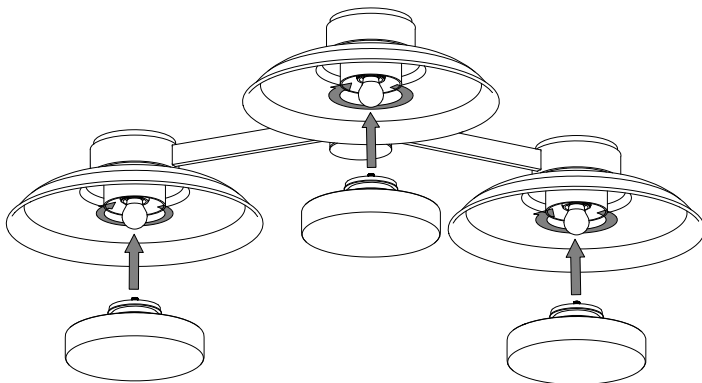

#### STEP 12

RESTORE POWER TO CIRCUIT. CONFIRM PROPER OPERATION OF FIXTURE.



# STAMFORD TRIPLE

## ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2428

### ELECTRICAL CONFIGURATION TABLE

FROM HOME	FROM LUMINAIRE
CONNECT BLACK OR RED (HOT) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE ROUND/BLACK WIRE (HOT)
CONNECT WHITE (NEUTRAL) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE RIBBED/WHITE WIRE (NEUTRAL)
CONNECT GREEN INSULATED OR BARE COPPER (GROUND -) HOUSE SUPPLY CIRCUIT WIRE TO GREEN GROUND SCREW ON MOUNTING PLATE.	

**GENERAL NOTE: USE UL LISTED WIRE NUTS FOR THE  
WIRING CONNECTIONS IN THIS LUMINAIRE. WRAP  
WIRE NUT CONNECTIONS WITH UL LISTED  
ELECTRICAL TAPE.**

**FOR QUESTIONS, PLEASE CONTACT CLIENT SERVICES  
AT:**

**843.723.8140 OR [INFO@URBANELECTRIC.COM](mailto:INFO@URBANELECTRIC.COM)**