



THE HAND ASSEMBLY AND MOUNTING INSTRUCTIONS

NK-2007 & NK-1355WR

GENERAL NOTES



- THIS LUMINAIRE IS SUITED FOR DAMP LOCATIONS.
- THIS LUMINAIRE IS UL LISTED. WHEN INSTALLING LUMINAIRE, CONFORM TO ALL APPLICABLE LOCAL ELECTRICAL CODES, ORDINANCES, AND THE NATIONAL ELECTRICAL CODE (NEC).
- FOR YOUR SAFETY AND PROPER OPERATION OF LUMINAIRE, READ AND UNDERSTAND ALL INSTRUCTIONS COMPLETELY BEFORE COMMENCING INSTALLATION OF THIS LUMINAIRE.
- CAREFULLY UNPACK THE LUMINAIRE AND INSPECT FOR DAMAGE.
- THIS PRODUCT IS RATED FOR ONE 60W MAX, TYPE A BULB.
- SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

CAUTION

THIS PRODUCT SHOULD BE INSTALLED ONLY BY A LICENSED ELECTRICIAN.

WARNING

THE ELECTRICITY MUST BE TURNED OFF AT THE MAIN FUSE BOX BEFORE INSTALLING THIS LUMINAIRE. TURNING POWER OFF USING THE LIGHT SWITCH MAY NOT BE SUFFICIENT TO PREVENT ELECTRICAL SHOCK.

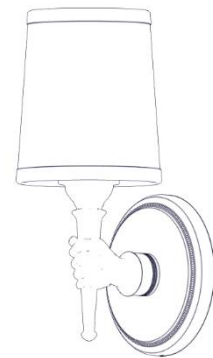

COMPONENTS PROVIDED FOR INSTALLATION

FIXTURE BODY	MOUNTING PLATE	SHADE (OPTIONAL)	BULB
WIRE NUT (2X)	HEX WRENCH	WOOD SCREW (2X)	WALL ANCHOR (2X)



THE HAND ASSEMBLY AND MOUNTING INSTRUCTIONS

NK-2007 & NK-1355WR


MOUNTING INSTRUCTIONS

STEP 1

SHUT OFF MAIN ELECTRICAL SUPPLY TO JUNCTION BOX FROM FUSE BOX/CIRCUIT BREAKER. TURNING POWER OFF AT SWITCH IS NOT SUFFICIENT.


STEP 2

USE HEX WRENCH PROVIDED TO LOOSEN SET SCREW ON BOTTOM OF FIXTURE AND REMOVE MOUNTING PLATE FROM BACK OF FIXTURE BODY.

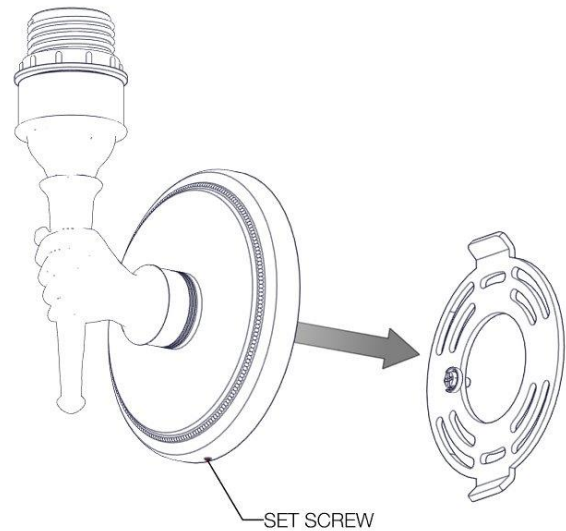

STEP 3

LOCATE JUNCTION BOX AND PULL HOUSE SUPPLY CIRCUIT WIRING THROUGH WIRE-WAY OF MOUNTING PLATE. ATTACH MOUNTING PLATE TO JUNCTION BOX USING JUNCTION BOX SCREWS OR MOUNT DIRECTLY TO WALL WITH WOOD SCREWS AND WALL ANCHORS PROVIDED. IT IS IMPORTANT TO CHECK THAT MOUNTING PLATE IS LEVEL.

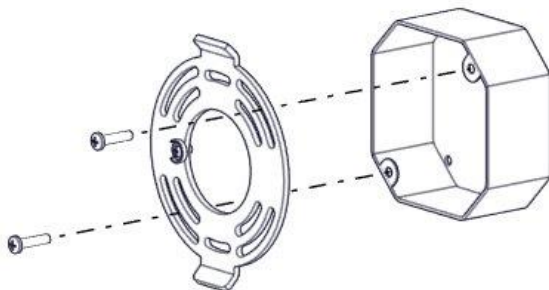

STEP 4

USING WIRE NUTS PROVIDED, MAKE ELECTRICAL CONNECTIONS BY FOLLOWING ELECTRICAL CONFIGURATION TABLE BELOW. ENSURE THAT ALL ELECTRICAL CONNECTIONS ARE WRAPPED WITH UL-LISTED ELECTRICAL TAPE.




THE HAND ASSEMBLY AND MOUNTING INSTRUCTIONS

NK-2007 & NK-1355WR

STEP 5


ATTACH FIXTURE TO WALL BY SLIPPING IT OVER MOUNTING PLATE AND TIGHTENING SET SCREW AT BOTTOM OF FIXTURE.

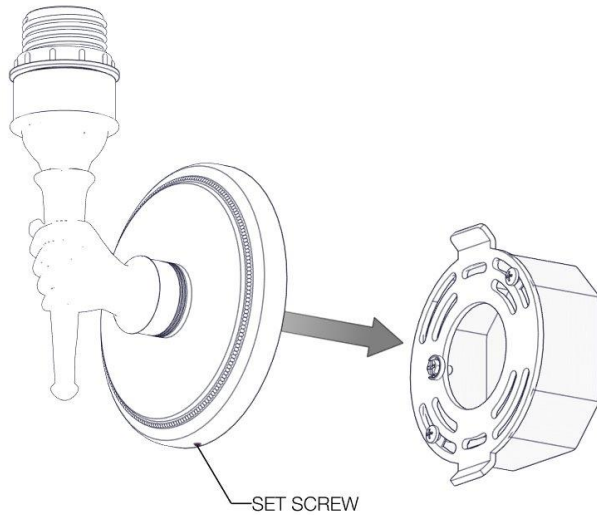

STEP 6

FOR SHADED OPTION:

UNTHREAD SCREW COLLAR PLACE SHADE ON SOCKET. SECURE SHADE WITH SCREW COLLAR.

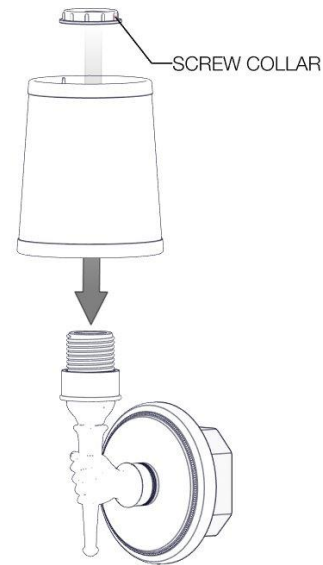

STEP 7

INSTALL BULB AND RESTORE POWER TO FIXTURE. CONFIRM PROPER OPERATION OF FIXTURE.

ELECTRICAL CONFIGURATION TABLE

FROM HOME	FROM LUMINAIRE
CONNECT BLACK OR RED (HOT) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE ROUND/BLACK WIRE (HOT)
CONNECT WHITE (NEUTRAL) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE RIBBED/WHITE WIRE (NEUTRAL)
CONNECT GREEN INSULATED OR BARE COPPER (GROUND -) HOUSE SUPPLY CIRCUIT TO GREEN GROUND SCREW ON MOUNTING PLATE.	

GENERAL NOTE: USE UL LISTED WIRE NUTS FOR THE WIRING CONNECTIONS IN THIS LUMINAIRE. WRAP WIRE NUT CONNECTIONS WITH UL LISTED ELECTRICAL TAPE.

FOR QUESTIONS, PLEASE CONTACT CLIENT SERVICES AT:
843.723.8140 OR INFO@URBANELECTRIC.COM