



GENERAL NOTES

- CAREFULLY UNPACK THE LUMINAIRE AND INSPECT FOR DAMAGE.
- PLEASE WEAR GLOVES TO PROTECT THE FINISH OF THE FIXTURE.
- SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

NOTICE


- FOR YOUR SAFETY AND PROPER OPERATION OF LUMINAIRE, READ AND UNDERSTAND ALL INSTRUCTIONS COMPLETELY BEFORE COMMENCING INSTALLATION OF THIS LUMINAIRE.
- THIS LUMINAIRE IS SUITED FOR DAMP LOCATIONS.
- THIS LUMINAIRE IS UL LISTED. WHEN INSTALLING LUMINAIRE, CONFORM TO ALL APPLICABLE LOCAL ELECTRICAL CODES, ORDINANCES, AND THE NATIONAL ELECTRICAL CODE (NEC).
- THIS PRODUCT IS RATED FOR 10W LED

⚠ CAUTION

THIS PRODUCT SHOULD BE INSTALLED ONLY BY A LICENSED ELECTRICIAN.


⚠ WARNING

THE ELECTRICITY MUST BE TURNED OFF AT THE MAIN FUSE BOX BEFORE INSTALLING THIS LUMINAIRE. TURNING POWER OFF USING THE LIGHT SWITCH MAY NOT BE SUFFICIENT TO PREVENT ELECTRICAL SHOCK.

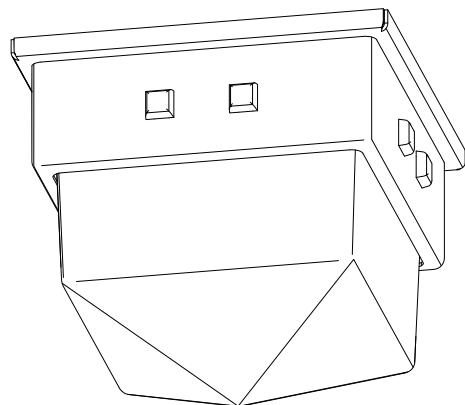


COMPONENTS PROVIDED FOR INSTALLATION

BOX 1

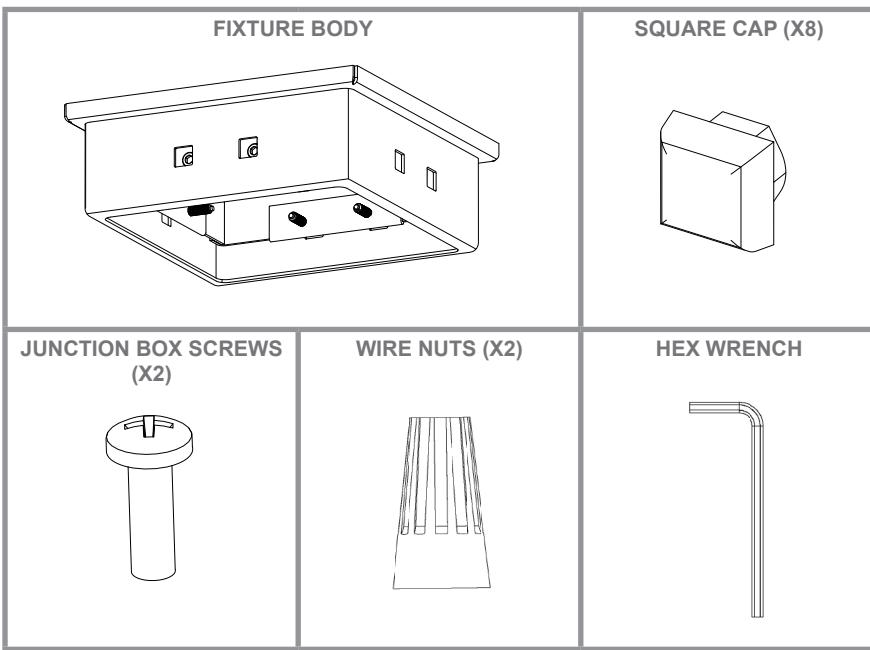

BOX 2

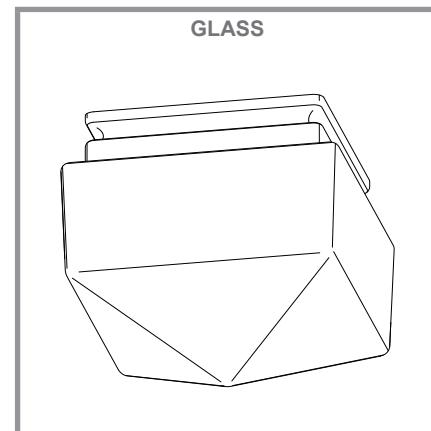



TIP

ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2464


MOUNTING INSTRUCTIONS - 2 PERSON INSTALL

STEP 1

SHUT OFF THE MAIN ELECTRICAL SUPPLY TO THE JUNCTION BOX FROM THE FUSE BOX/CIRCUIT BREAKER. TURNING POWER OFF AT THE SWITCH IS NOT SUFFICIENT.


STEP 2

LOOSEN HEX NUTS ON MOUNTING STUDS WITHIN FIXTURE BODY AS NECESSARY. ROTATE MOUNTING PLATE AND LIFT OUT OF FIXTURE BODY.

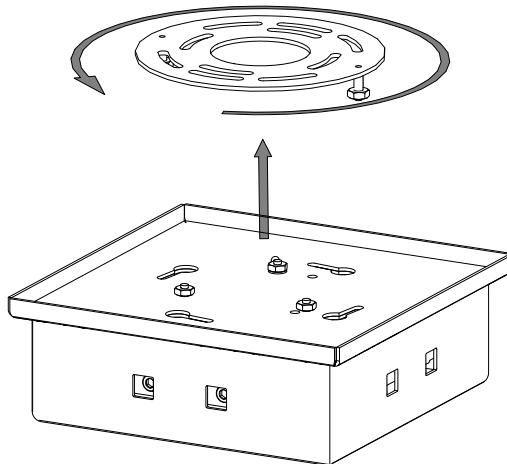

STEP 3

ATTACH MOUNTING PLATE TO JUNCTION BOX WITH JUNCTION BOX SCREWS. STUDS IN MOUNTING PLATE SHOULD BE FACING DOWN.

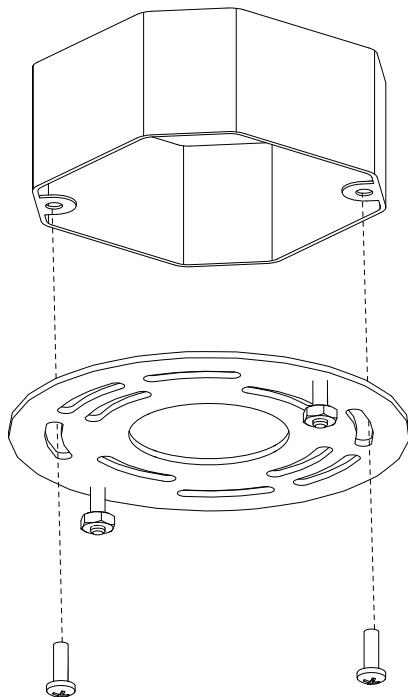


STEP 4

LIFT FIXTURE TO CEILING. USING THE WIRE NUTS PROVIDED, MAKE ELECTRICAL CONNECTIONS BY FOLLOWING THE ELECTRICAL CONFIGURATION TABLE BELOW. ENSURE THAT ALL ELECTRICAL CONNECTIONS ARE WRAPPED WITH UL-LISTED ELECTRICAL TAPE.

IMPORTANT: NEVER ALLOW FIXTURE TO "HANG" FROM ELECTRICAL CONNECTIONS OR TO OTHERWISE PUT PRESSURE ON THE CONNECTIONS. THE WEIGHT OF THE FIXTURE SHOULD BE SUPPORTED BY THE MOUNTING ASSEMBLY.

SLIP MOUNTING PLATE STUDS WITH HEX NUTS INTO KEY HOLE SLOTS IN FIXTURE BODY AND ROTATE COUNTER CLOCKWISE. TIGHTEN HEX NUTS UNTIL FIXTURE IS FLUSH TO CEILING.

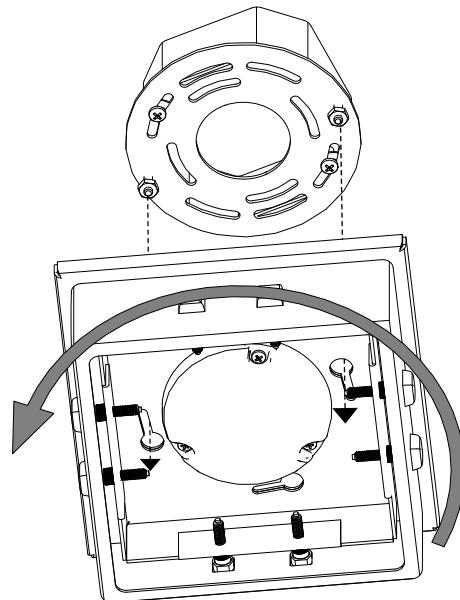




TIP

ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2464

STEP 5


LOOSEN SOCKET HEAD SCREWS IN FIXTURE BODY WITH PROVIDED HEX WRENCH. LIFT GLASS INTO FIXTURE AND RETIGHTEN SCREWS EVENLY SO THEY ARE ALL ENGAGED IN TOP LIP OF GLASS AND GLASS IS SNUG.

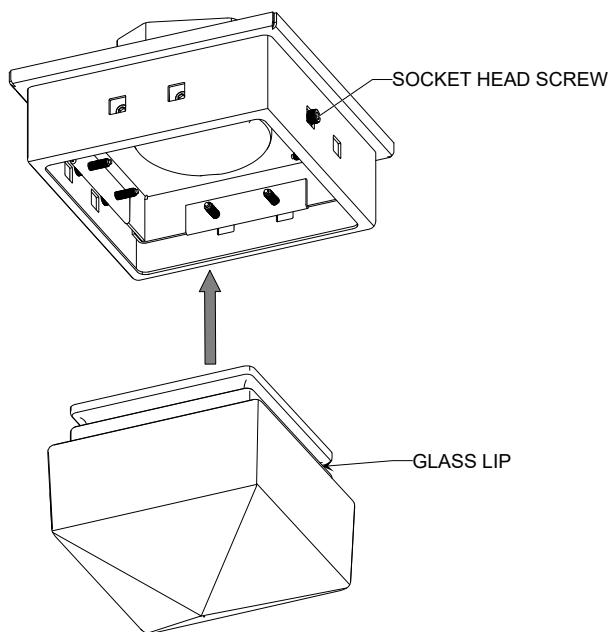

STEP 6

ATTACH SQUARE CAPS TO SOCKET SCREW HEADS

RETURN POWER TO CIRCUIT. CONFIRM PROPER OPERATION OF FIXTURE.

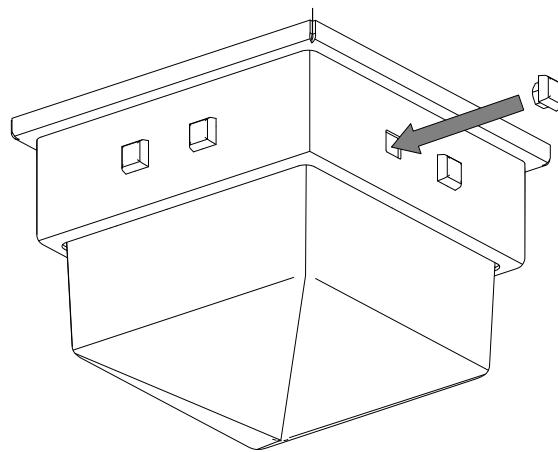

ELECTRICAL CONFIGURATION TABLE

FROM HOME	FROM LUMINAIRE
CONNECT BLACK OR RED (HOT) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE ROUND/BLACK WIRE (HOT)
CONNECT WHITE (NEUTRAL) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE RIBBED/WHITE WIRE (NEUTRAL)
CONNECT GREEN INSULATED OR BARE COPPER (GROUND -) HOUSE SUPPLY CIRCUIT WIRE AND LUMINAIRE BARE STRANDED WIRE (GROUND -) TO GREEN GROUND SCREW ON CROSSBAR.	

GENERAL NOTE: USE UL LISTED WIRE NUTS FOR THE WIRING CONNECTIONS IN THIS LUMINAIRE. WRAP WIRE NUT CONNECTIONS WITH UL LISTED ELECTRICAL TAPE.

FOR QUESTIONS, PLEASE CONTACT CLIENT SERVICES AT: 843.723.8140 OR INFO@URBANELECTRICCO.COM