



VIC ON BRACKET ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-1742

GENERAL NOTES


- THIS LUMINAIRE IS SUITED FOR WET LOCATIONS.
- THIS LUMINAIRE IS UL LISTED. WHEN INSTALLING LUMINAIRE, CONFORM TO ALL APPLICABLE LOCAL ELECTRICAL CODES, ORDINANCES, AND THE NATIONAL ELECTRICAL CODE (NEC).
- FOR YOUR SAFETY AND PROPER OPERATION OF LUMINAIRE, READ AND UNDERSTAND ALL INSTRUCTIONS COMPLETELY BEFORE COMMENCING INSTALLATION OF THIS LUMINAIRE.
- CAREFULLY UNPACK THE LUMINAIRE AND INSPECT FOR DAMAGE.
- THIS PRODUCT IS RATED FOR ONE 60W MAX, TYPE A BULB.
- SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

CAUTION

THIS PRODUCT SHOULD BE INSTALLED ONLY BY A LICENSED ELECTRICIAN. PLEASE WEAR GLOVES TO PROTECT THE FINISH OF THE FIXTURE.

WARNING

THE ELECTRICITY MUST BE TURNED OFF AT THE MAIN FUSE BOX BEFORE INSTALLING THIS LUMINAIRE. TURNING POWER OFF USING THE LIGHT SWITCH MAY NOT BE SUFFICIENT TO PREVENT ELECTRICAL SHOCK.

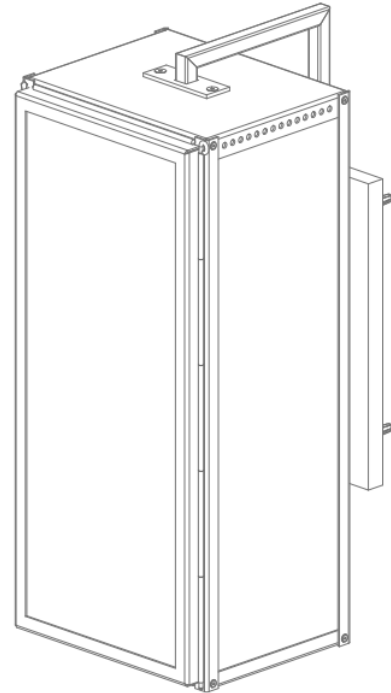

COMPONENTS PROVIDED FOR INSTALLATION

FIXTURE BODY	INCANDESCENT BULB	DOOR GLASS (001)	BACK GLASS (002)	SIDE GLASS (X2) (003)
WOOD SCREWS (X4)	MOUNTING ANCHORS (X4)	GLASS RETAINING CLIP (X8)	HEX WRENCH	



VIC ON BRACKET ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-1742


MOUNTING INSTRUCTIONS

STEP 1

SHUT OFF THE MAIN ELECTRICAL SUPPLY TO THE JUNCTION BOX FROM THE FUSE BOX/CIRCUIT BREAKER. TURNING POWER OFF AT THE SWITCH IS NOT SUFFICIENT.


STEP 2

USING THE PROVIDED HEX WRENCH, LOOSEN THE TWO SET SCREWS AT THE BOTTOM OF THE FIXTURE. REMOVE THE MOUNTING PLATE FROM THE BACK OF THE FIXTURE AND PLACE THE FIXTURE ASIDE.



STEP 3

PULL HOUSE SUPPLY CIRCUIT WIRING THROUGH THE WIRE-WAY OF THE MOUNTING PLATE. ATTACH THE MOUNTING PLATE TO THE JUNCTION BOX USING THE JUNCTION BOX SCREWS AND DIRECTLY TO THE WALL WITH THE WOOD SCREWS AND WALL ANCHORS PROVIDED. IT IS IMPORTANT TO CHECK LEVEL ON THE MOUNTING PLATE.




STEP 4

USING THE WIRE NUTS INCLUDED, MAKE ELECTRICAL CONNECTIONS BY FOLLOWING THE ELECTRICAL CONFIGURATION TABLE PROVIDED (FINAL PAGE). ENSURE THAT ALL ELECTRICAL CONNECTIONS ARE WRAPPED WITH UL-LISTED ELECTRICAL TAPE.


STEP 5

ATTACH THE FIXTURE TO THE WALL BY SLIPPING THE FIXTURE OVER THE MOUNTING PLATE AND TIGHTENING THE TWO SET SCREWS AT THE BOTTOM OF THE FIXTURE. BE CAREFUL TO AVOID SCRATCHING THE FINISH ON THE FIXTURE.

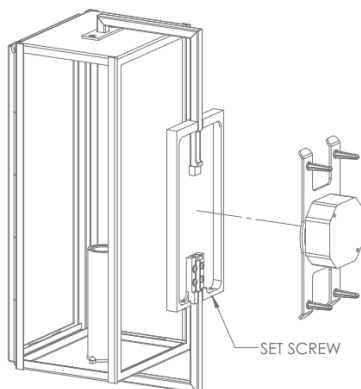

STEP 6

REMOVE THE DOOR LATCH PIN AND OPEN THE DOOR OF THE FIXTURE. INSTALL THE DOOR GLASS (001) BY INSERTING THE TOP EDGE OF THE GLASS PANE INTO THE CHANNEL AT THE TOP OF THE DOOR. ONCE THE TOP EDGE OF GLASS IS IN PLACE, GENTLY STRAIGHTEN THE PANE AND LOWER IT INTO THE CHANNEL AT THE BOTTOM OF THE DOOR. INSTALL TWO GLASS RETAINING CLIPS ON THE INSIDE OF THE GLASS IN THE TOP AND BOTTOM CHANNEL TO GLASS. SECURE THE






VIC ON BRACKET ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-1742

STEP 7


WITH THE FIXTURE DOOR OPEN, REMOVE THE TWO ACORN NUTS AND THE GLASS SUPPORT PAN AT THE INSIDE TOP OF THE FIXTURE AND SET ASIDE.

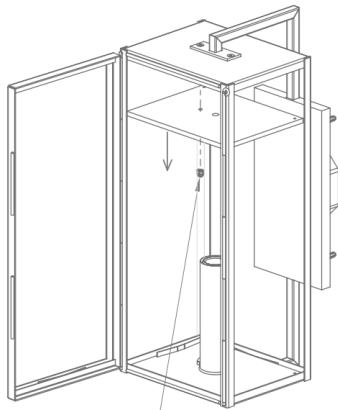

ACORN NUTS 2X


STEP 8

INSTALL THE BACK PANE (002) BY INSERTING THE BOTTOM EDGE OF THE GLASS PANE INTO THE CHANNEL AT THE BOTTOM OF THE FIXTURE. ONCE THE BOTTOM EDGE OF GLASS IS IN PLACE, GENTLY STRAIGHTEN THE PANE OF GLASS TO BE FLUSH WITH FRAME BODY. INSTALL A GLASS RETAINING CLIP ON THE INSIDE OF THE GLASS IN THE BOTTOM CHANNEL TO SECURE THE GLASS PANE. REPEAT FOR THE REMAINING TWO SIDE PANES OF GLASS.

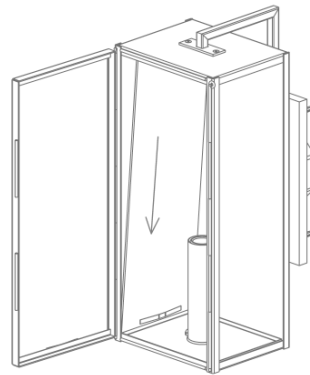

STEP 9

RE-INSTALL THE GLASS SUPPORT PAN BY SLIPPING THE PAN OVER THE TOP STUDS AND SECURE IN PLACE WITH THE TWO ACORN NUTS. FINALLY INSTALL THE THREE REMAINING GLASS RETAINING CLIPS ON THE INSIDE OF THE GLASS IN THE TOP CHANNEL TO SECURE THE THREE GLASS PANES.

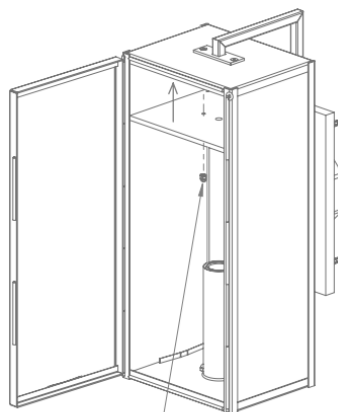


ACORN NUTS 2X

APPLY SEALANT IN ACORN NUTS IF INSTALLED
IN AN EXTERIOR LOCATION

STEP 10

INSTALL THE LIGHT BULB IN THE FIXTURE SOCKET AND RESTORE POWER TO THE FIXTURE. CONFIRM PROPER OPERATION OF THE LIGHT FIXTURE.

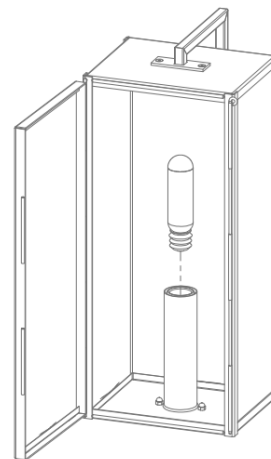



VIC ON BRACKET ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-1742

STEP 11

IMPORTANT: IF THE FIXTURE IS INSTALLED IN AN EXTERIOR LOCATION, RUN A BEAD OF SEALANT AROUND THE PERIMETER OF THE BACKPLATE AND IN THE THREADS OF THE TOP 2 ACORN NUTS SHOWN IN STEP 9 TO PREVENT WATER FROM REACHING THE WIRE CONNECTIONS.

ELECTRICAL CONFIGURATION TABLE

FROM HOME	FROM LUMINAIRE
CONNECT BLACK OR RED (HOT) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE ROUND/BLACK WIRE (HOT)
CONNECT WHITE (NEUTRAL) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE RIBBED/WHITE WIRE (NEUTRAL)
CONNECT GREEN INSULATED OR BARE COPPER (GROUND -) HOUSE SUPPLY CIRCUIT WIRE AND LUMINAIRE BARE STRANDED WIRE (GROUND -) TO GREEN GROUND SCREW ON FIXTURE BODY.	

GENERAL NOTE: USE UL LISTED WIRE NUTS FOR THE WIRING CONNECTIONS IN THIS LUMINAIRE. WRAP WIRE NUT CONNECTIONS WITH UL LISTED ELECTRICAL TAPE.

FOR QUESTIONS, PLEASE CONTACT CLIENT SERVICES AT:

843.723.8140 OR INFO@URBANELECTRICCO.COM