



BALLE

ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2567

GENERAL NOTES


- THIS LUMINAIRE IS SUITED FOR DAMP LOCATIONS.
- THIS LUMINAIRE IS UL LISTED. WHEN INSTALLING LUMINAIRE, CONFORM TO ALL APPLICABLE LOCAL ELECTRICAL CODES, ORDINANCES, AND THE NATIONAL ELECTRICAL CODE (NEC).
- FOR YOUR SAFETY AND PROPER OPERATION OF LUMINAIRE, READ AND UNDERSTAND ALL INSTRUCTIONS COMPLETELY BEFORE COMMENCING INSTALLATION OF THIS LUMINAIRE.
- CAREFULLY UNPACK THE LUMINAIRE AND INSPECT FOR DAMAGE.
- THIS PRODUCT IS RATED FOR ONE 60W MAX, TYPE A BULB.
- SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

CAUTION






THIS PRODUCT SHOULD BE INSTALLED ONLY BY A LICENSED ELECTRICIAN.

WARNING

THE ELECTRICITY MUST BE TURNED OFF AT THE MAIN FUSE BOX BEFORE INSTALLING THIS LUMINAIRE. TURNING POWER OFF USING THE LIGHT SWITCH MAY NOT BE SUFFICIENT TO PREVENT ELECTRICAL SHOCK.

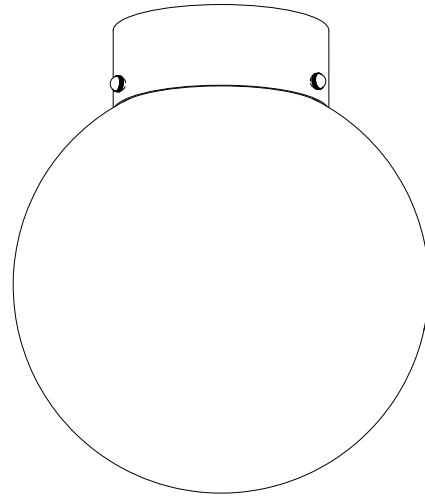

COMPONENTS PROVIDED FOR INSTALLATION

FIXTURE BODY	GLASS	BULB	WIRE NUTS
			
JUNCTION BOX SCREWS (X2)			
			



BALLE

ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2567

MOUNTING INSTRUCTIONS

STEP 1


SHUT OFF MAIN ELECTRICAL SUPPLY TO JUNCTION BOX FROM FUSE BOX/CIRCUIT BREAKER. TURNING POWER OFF AT SWITCH IS NOT SUFFICIENT.

STEP 2

LOCATE JUNCTION BOX. LIFT FIXTURE TO CEILING AND, USING WIRENUTS PROVIDED, MAKE ELECTRICAL CONNECTIONS USING ELECTRICAL CONFIGURATION TABLE PROVIDED. ENSURE ALL ELECTRICAL CONNECTIONS ARE WRAPPED WITH UL-LISTED ELECTRICAL TAPE.


STEP 3

ATTACH FIXTURE TO JUNCTION BOX WITH JUNCTION BOX SCREWS.

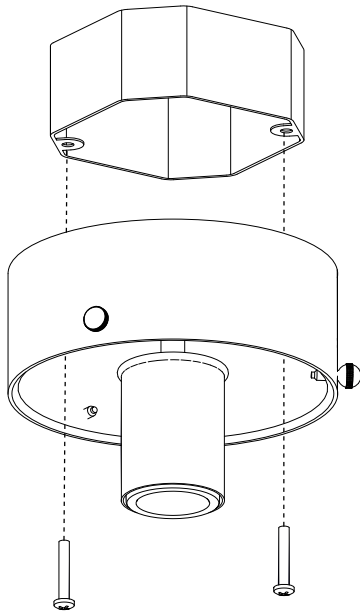

STEP 4

INSTALL BULB. RESTORE POWER TO CIRCUIT AND CONFIRM PROPER OPERATION OF FIXTURE.

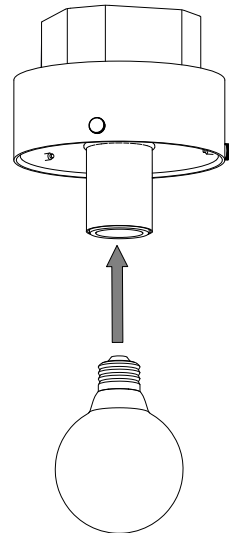




BALLE ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2567

STEP 5

LOOSEN THUMB NUTS UNTIL COLLAR OR GLASS GLOBE CAN PASS THROUGH. SECURE IN PLACE BY RETIGHTENING THUMB NUTS EVENLY.

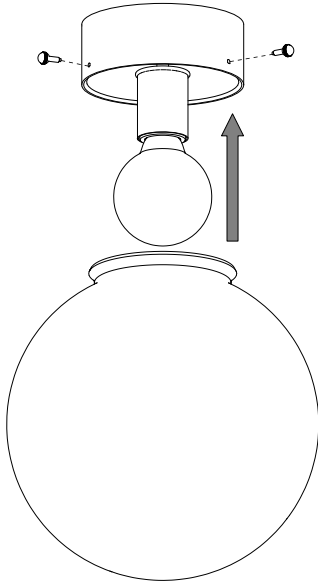

ELECTRICAL CONFIGURATION TABLE

FROM HOME	FROM LUMINAIRE
CONNECT BLACK OR RED (HOT) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE ROUND/BLACK WIRE (HOT)
CONNECT WHITE (NEUTRAL) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE RIBBED/WHITE WIRE (NEUTRAL)
CONNECT GREEN INSULATED OR BARE COPPER (GROUND -) HOUSE SUPPLY CIRCUIT WIRE TO LUMINAIRE BARE STRANDED WIRE (GROUND -)	

GENERAL NOTE: USE UL LISTED WIRE NUTS FOR THE WIRING CONNECTIONS IN THIS LUMINAIRE. WRAP WIRE NUT CONNECTIONS WITH UL LISTED ELECTRICAL TAPE.

FOR QUESTIONS, PLEASE CONTACT CLIENT SERVICES AT:

843.723.8140 OR INFO@URBANELECTRIC.COM