



BETTY SHADED PENDANT

ASSEMBLY AND MOUNTING INSTRUCTIONS

KH-1834

GENERAL NOTES


- THIS LUMINAIRE IS SUITED FOR DAMP LOCATIONS.
- THIS LUMINAIRE IS UL LISTED. WHEN INSTALLING LUMINAIRE, CONFORM TO ALL APPLICABLE LOCAL ELECTRICAL CODES, ORDINANCES, AND THE NATIONAL ELECTRICAL CODE (NEC).
- FOR YOUR SAFETY AND PROPER OPERATION OF LUMINAIRE, READ AND UNDERSTAND ALL INSTRUCTIONS COMPLETELY BEFORE COMMENCING INSTALLATION OF THIS LUMINAIRE.
- CAREFULLY UNPACK THE LUMINAIRE AND INSPECT FOR DAMAGE.
- THIS PRODUCT IS RATED FOR:
 - FOUR 60W MAX, TYPE A BULBS.
- SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

CAUTION

THIS PRODUCT SHOULD BE INSTALLED ONLY BY A LICENSED ELECTRICIAN. PLEASE WEAR GLOVES TO PROTECT THE FINISH OF THE FIXTURE.

WARNING

THE ELECTRICITY MUST BE TURNED OFF AT THE MAIN FUSE BOX BEFORE INSTALLING THIS LUMINAIRE. TURNING POWER OFF USING THE LIGHT SWITCH MAY NOT BE SUFFICIENT TO PREVENT ELECTRICAL SHOCK.

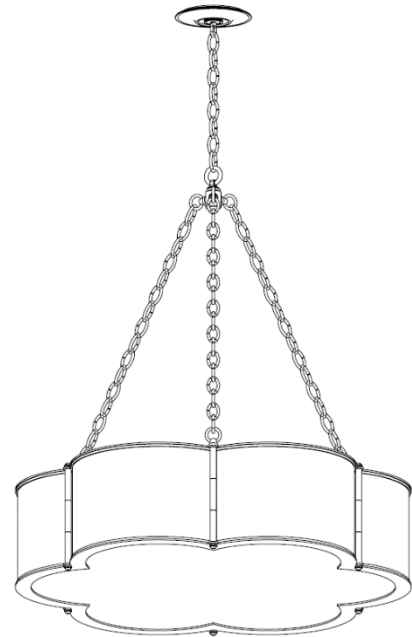

COMPONENTS PROVIDED FOR INSTALLATION - TWO PERSON INSTALL

FIXTURE BODY	CANOPY	CROSSBAR ASSEMBLY	GLASS PANE	CENTER LOOP CLUSTER	(X3) FIXTURE CHAIN
TOP CHAIN	HOUSEHOLD BULBS	WIRE NUTS	HEX WRENCH	WIRE HARNESS	




BETTY SHADED PENDANT ASSEMBLY AND MOUNTING INSTRUCTIONS

KH-1834

PART 1- GLASS INSTALL INSTRUCTIONS


STEP 1

REMOVE AND SET ASIDE THE ELECTRICAL CROSSBAR BY REMOVING THE FOUR FLAT HEAD SCREWS FROM THE OUTSIDE OF THE FRAME.

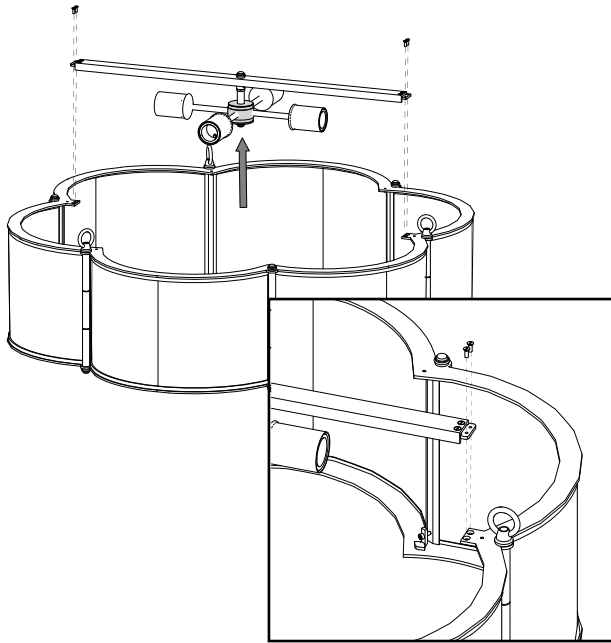

STEP 2


CAREFULLY INSTALL GLASS DIFFUSER INTO THE BOTTOM OF THE FIXTURE BODY.

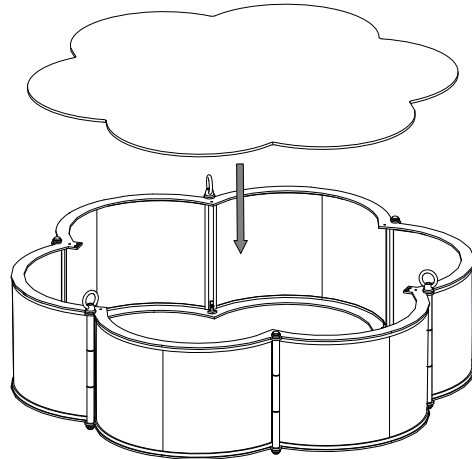

STEP 3

REATTACH THE ELECTRICAL CROSSBAR TO THE FIXTURE BODY WITH THE FOUR FLAT HEAD SCREWS.

***ENSURE THAT THE WIRE LEADS OF THE ELECTRICAL CROSSBAR ARE ON THE LOOP SIDE OF THE FIXTURE. ***

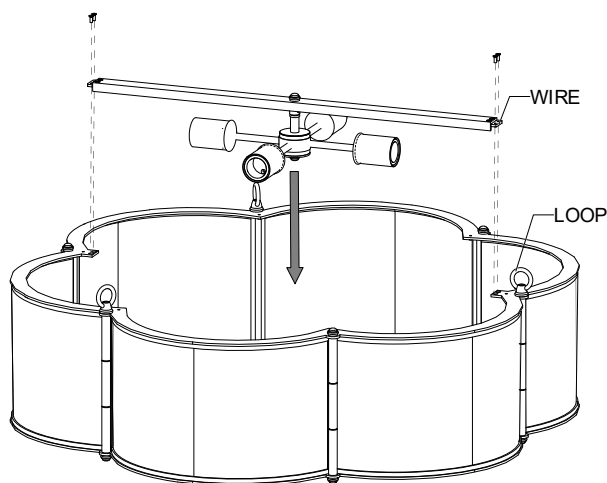



BETTY SHADED PENDANT ASSEMBLY AND MOUNTING INSTRUCTIONS

KH-1834


PART 2 - MOUNTING INSTRUCTIONS

STEP 1

SHUT OFF THE MAIN ELECTRICAL SUPPLY TO THE JUNCTION BOX FROM THE FUSE BOX/CIRCUIT BREAKER. TURNING POWER OFF AT THE SWITCH IS NOT SUFFICIENT.

STEP 2


ATTACH THE PROVIDED CROSSBAR ASSEMBLY TO THE JUNCTION BOX USING THE JUNCTION BOX SCREWS. REMOVE SCREW COLLAR FROM THE LOOP AND SET ASIDE. TIGHTEN THE SET SCREW LOCATED IN THE THREADS OF THE LOOP WITH THE PROVIDED HEX WRENCH. THIS WILL HELP PREVENT SPINNING OF THE FIXTURE

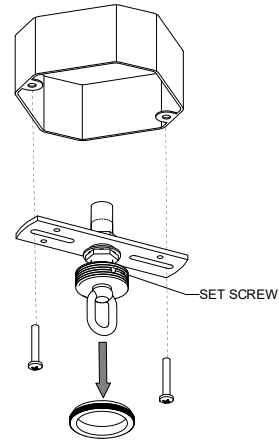

STEP 3

USING CHAIN PLIERS, ATTACH THE THREE FIXTURE CHAINS TO THE LOOPS ON THE TOP OF THE FIXTURE. CLOSE THE OPEN CHAIN LINKS TO FINISH SECURING THE CHAINS TO THE LOOPS OF THE FIXTURE. DO NOT USE LESS THAN 10 LINKS PER LENGTH OF CHAIN.


***PLACE PADDING ON THE FIXTURE TO PROTECT THE FIXTURE FROM POTENTIAL DAMAGE FROM THE CHAIN. ***

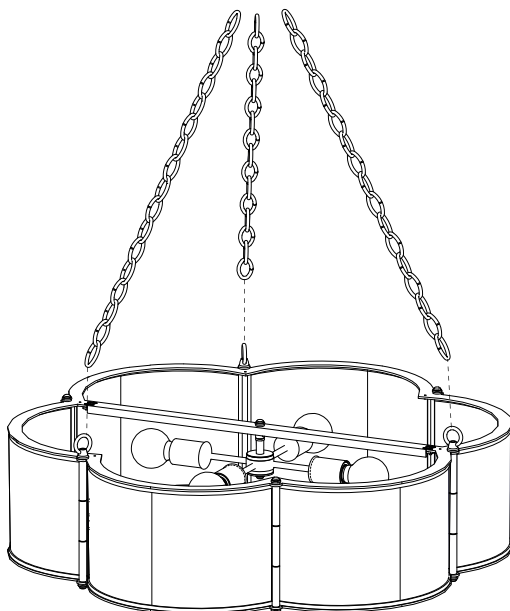

STEP 4

USING CHAIN PLIERS, ATTACH THE THREE FIXTURE CHAINS TO THE LOOPS ON THE SIDE OF THE CENTER LOOP CLUSTER. CLOSE THE OPEN CHAIN LINKS TO FINISH SECURING THE CHAINS TO THE SIDE LOOPS.

***KEEP PADDING ON THE FIXTURE TO PROTECT THE FIXTURE FROM POTENTIAL DAMAGE FROM THE CHAIN. ***

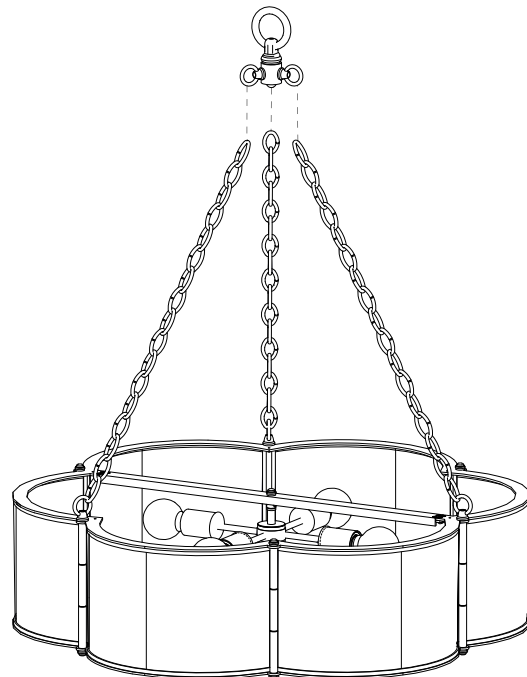



BETTY SHADED PENDANT ASSEMBLY AND MOUNTING INSTRUCTIONS

KH-1834

STEP 5

USE ENOUGH OF THE CHAIN PROVIDED TO ACHIEVE THE DESIRED HEIGHT OF THE FIXTURE FROM THE FLOOR AND ATTACH ONE END OF THE CHAIN TO THE TOP LOOP OF THE CENTER LOOP CLUSTER. CLOSE THE OPEN CHAIN LINK TO FINISH SECURING THE CHAIN TO THE TOP LOOP


***KEEP PADDING ON THE FIXTURE TO PROTECT THE FIXTURE FROM POTENTIAL DAMAGE FROM THE CHAIN. ***



STEP 6


ALLOW THE SCREW COLLAR AND THEN THE CANOPY TO SLIP DOWN THE CHAIN AND REST ON TOP OF THE CENTER LOOP CLUSTER. BE CAREFUL TO NOT DAMAGE THE FINISH.

***KEEP PADDING ON THE FIXTURE TO PROTECT THE FIXTURE FROM POTENTIAL DAMAGE FROM THE CHAIN. ***

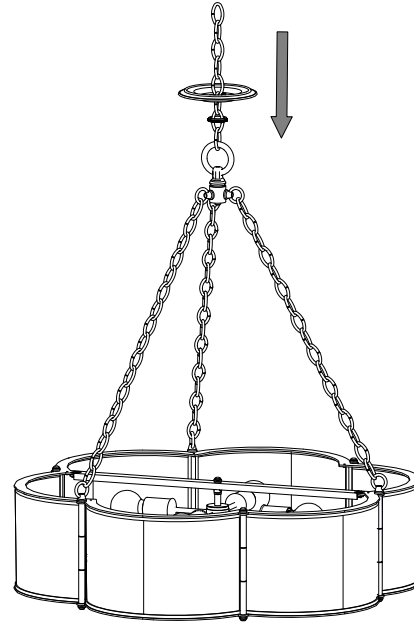

STEP 7

ATTACH THE OTHER END OF THE CHAIN TO THE LOOP ON THE CROSSBAR ASSEMBLY. CLOSE THE OPEN CHAIN LINK TO FINISH SECURING THE CHAIN TO THE LOOP OF THE CROSSBAR ASSEMBLY.

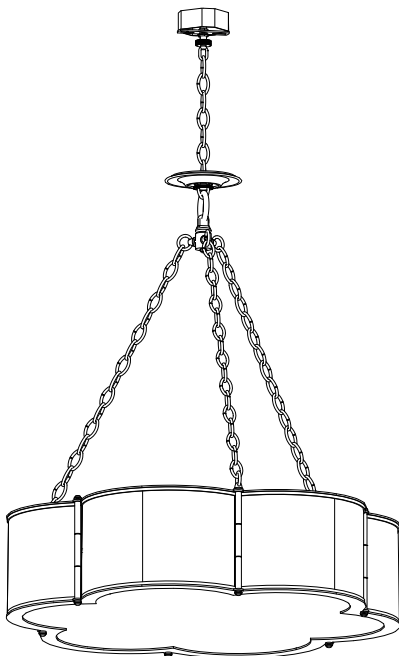

STEP 8

CONNECT WIRE HARNESS TO QUICK CONNECTS AT CROSSBAR AND FEED THE WIRING (INCLUDING GROUND) THROUGH THE FIXTURE CHAIN, SCREW COLLAR, CANOPY, TOP CHAIN, AND THEN THROUGH THE LOOP OF THE CROSSBAR ASSEMBLY INTO THE JUNCTION BOX.

USING THE WIRE NUTS PROVIDED, MAKE ELECTRICAL CONNECTIONS BY FOLLOWING THE ELECTRICAL CONFIGURATION TABLE BELOW. ENSURE THAT ALL ELECTRICAL CONNECTIONS ARE WRAPPED WITH UL-LISTED ELECTRICAL TAPE. IMPORTANT: NEVER ALLOW FIXTURE TO "HANG" FROM ELECTRICAL CONNECTIONS OR TO OTHERWISE PUT PRESSURE ON THE CONNECTIONS. THE WEIGHT OF THE FIXTURE SHOULD BE SUPPORTED BY THE CHAIN AND CROSSBAR ASSEMBLY.

IMPORTANT: NEVER ALLOW FIXTURE TO "HANG" FROM ELECTRICAL CONNECTIONS OR TO OTHERWISE PUT PRESSURE ON THE CONNECTIONS. THE WEIGHT OF THE FIXTURE SHOULD BE SUPPORTED BY THE CHAIN AND CROSSBAR ASSEMBLY




BETTY SHADED PENDANT ASSEMBLY AND MOUNTING INSTRUCTIONS

KH-1834


STEP 9

SLIP THE CANOPY AGAINST THE CEILING AND SECURE IN PLACE BY THREADING THE SCREW COLLAR ON TO THE LOOP OF THE CROSSBAR ASSEMBLY.

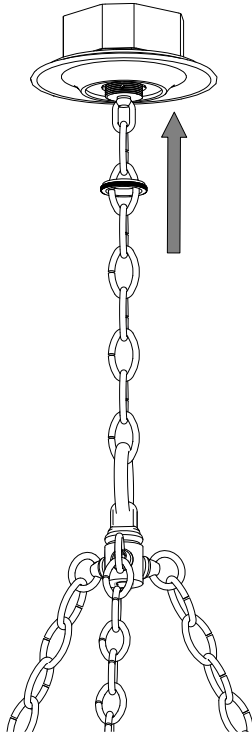

STEP 10

INSTALL THE LIGHT BULBS IN THE FIXTURE AND RESTORE POWER TO THE CIRCUIT. CONFIRM PROPER OPERATION OF THE LIGHT FIXTURE.

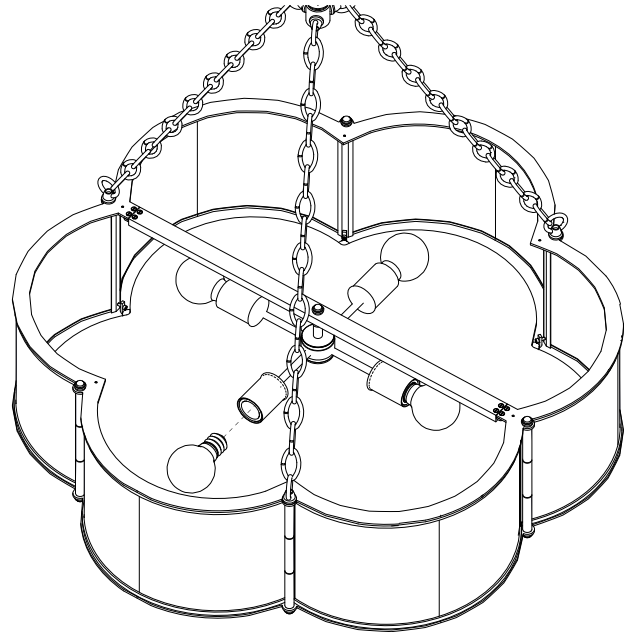

ELECTRICAL CONFIGURATION TABLE

FROM HOME	FROM LUMINAIRE
CONNECT BLACK OR RED (HOT) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE ROUND/BLACK WIRE (HOT)
CONNECT WHITE (NEUTRAL) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE RIBBED/WHITE WIRE (NEUTRAL)
CONNECT GREEN INSULATED OR BARE COPPER (GROUND -) HOUSE SUPPLY CIRCUIT WIRE AND LUMINAIRE BARE STRANDED WIRE (GROUND -) TO GREEN GROUND SCREW ON CROSSBAR.	

GENERAL NOTE: USE UL LISTED WIRE NUTS FOR THE WIRING CONNECTIONS IN THIS LUMINAIRE. WRAP WIRE NUT CONNECTIONS WITH UL LISTED ELECTRICAL TAPE.

FOR QUESTIONS, PLEASE CONTACT CLIENT SERVICES AT: 843.723.8140 OR INFO@URBANELECTRICCO.COM