



# CAPSE HANG LARGE

## ASSEMBLY AND MOUNTING INSTRUCTIONS

MA-1996

### GENERAL NOTES


- THIS LUMINAIRE IS SUITED FOR DAMP LOCATIONS.
- THIS LUMINAIRE IS UL LISTED. WHEN INSTALLING LUMINAIRE, CONFORM TO ALL APPLICABLE LOCAL ELECTRICAL CODES, ORDINANCES, AND THE NATIONAL ELECTRICAL CODE (NEC).
- FOR YOUR SAFETY AND PROPER OPERATION OF LUMINAIRE, READ AND UNDERSTAND ALL INSTRUCTIONS COMPLETELY BEFORE COMMENCING INSTALLATION OF THIS LUMINAIRE.
- CAREFULLY UNPACK THE LUMINAIRE AND INSPECT FOR DAMAGE.
- THIS PRODUCT IS RATED FOR ONE 60W MAX, TYPE A BULB.
- SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

#### CAUTION

THIS PRODUCT SHOULD BE INSTALLED ONLY BY A LICENSED ELECTRICIAN.


#### WARNING

THE ELECTRICITY MUST BE TURNED OFF AT THE MAIN FUSE BOX BEFORE INSTALLING THIS LUMINAIRE. TURNING POWER OFF USING THE LIGHT SWITCH MAY NOT BE SUFFICIENT TO PREVENT ELECTRICAL SHOCK.

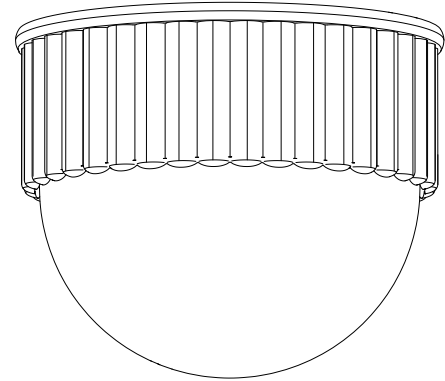


### COMPONENTS PROVIDED FOR INSTALLATION


FIXTURE BODY

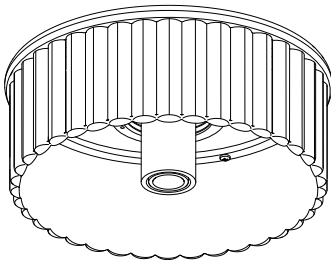


GLASS




MOUNTING ASSEMBLY




WIRE NUT (2X)



BULB



CANDLE SLEEVE





# CAPSE HANG LARGE

## ASSEMBLY AND MOUNTING INSTRUCTIONS

### MOUNTING INSTRUCTIONS – 2 PERSON INSTALLATION


MA-1996

#### STEP 1

SHUT OFF MAIN ELECTRICAL SUPPLY TO JUNCTION BOX FROM FUSE BOX/CIRCUIT BREAKER. TURNING POWER OFF AT SWITCH IS NOT SUFFICIENT.

#### STEP 2


REMOVE CANDLE SLEEVE FROM FIXTURE.  
LIFT MOUNTING ASSEMBLY AWAY FROM FIXTURE.

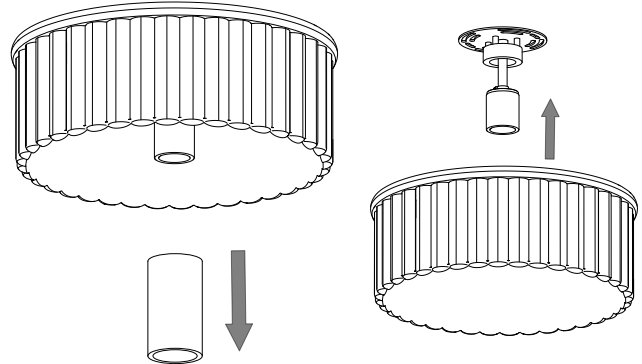

#### STEP 3


MAKE ELECTRICAL CONNECTIONS TO MAIN SUPPLY WITH WIRE NUTS PROVIDED.

ATTACH MOUNTING ASSEMBLY TO JUNCTION BOX WITH JUNCTION BOX SCREWS.

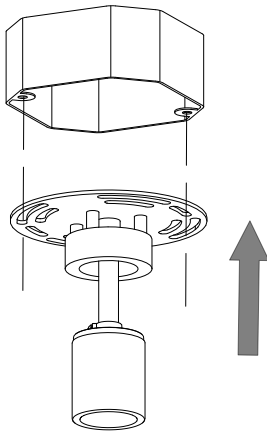


#### STEP 4

RAISE FIXTURE BODY TO MOUNTING ASSEMBLY AND SECURE WITH CANDLE SLEEVE.

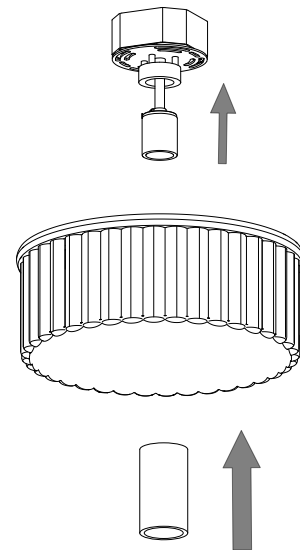

#### STEP 5

INSTALL BULB.  
INSTALL GLASS

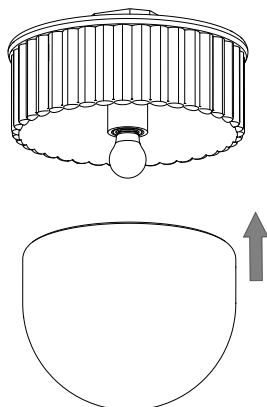

#### STEP 6

RESTORE POWER TO CIRCUIT AND CONFIRM PROPER OPERATION OF FIXTURE.



# CAPSE HANG LARGE

## ASSEMBLY AND MOUNTING INSTRUCTIONS

MA-1996

### ELECTRICAL CONFIGURATION TABLE

FROM HOME	FROM LUMINAIRE
CONNECT BLACK OR RED (HOT) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE ROUND/BLACK WIRE (HOT)
CONNECT WHITE (NEUTRAL) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE RIBBED/WHITE WIRE (NEUTRAL)
CONNECT GREEN INSULATED OR BARE COPPER (GROUND -) HOUSE SUPPLY CIRCUIT WIRE TO LUMINAIRE BARE STRANDED WIRE (GROUND -)	

**GENERAL NOTE:** USE UL LISTED WIRE NUTS FOR THE WIRING CONNECTIONS IN THIS LUMINAIRE. WRAP WIRE NUT CONNECTIONS WITH UL LISTED ELECTRICAL TAPE.

FOR QUESTIONS, PLEASE CONTACT CLIENT SERVICES AT:  
843.723.8140 OR [INFO@URBANELECTRIC.COM](mailto:INFO@URBANELECTRIC.COM)