



FLORA

ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2466

GENERAL NOTES

- CAREFULLY UNPACK THE LUMINAIRE AND INSPECT FOR DAMAGE.
- PLEASE WEAR GLOVES TO PROTECT THE FINISH OF THE FIXTURE.
- SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

NOTICE


- FOR YOUR SAFETY AND PROPER OPERATION OF LUMINAIRE, READ AND UNDERSTAND ALL INSTRUCTIONS COMPLETELY BEFORE COMMENCING INSTALLATION OF THIS LUMINAIRE.
- THIS LUMINAIRE IS SUITED FOR DAMP LOCATIONS.
- THIS LUMINAIRE IS UL LISTED. WHEN INSTALLING LUMINAIRE, CONFORM TO ALL APPLICABLE LOCAL ELECTRICAL CODES, ORDINANCES, AND THE NATIONAL ELECTRICAL CODE (NEC).
- THIS PRODUCT IS RATED FOR ONE 10W MAX TYPE T4 BULB.

CAUTION

THIS PRODUCT SHOULD BE INSTALLED ONLY BY A LICENSED ELECTRICIAN.

WARNING

THE ELECTRICITY MUST BE TURNED OFF AT THE MAIN FUSE BOX BEFORE INSTALLING THIS LUMINAIRE. TURNING POWER OFF USING THE LIGHT SWITCH MAY NOT BE SUFFICIENT TO PREVENT ELECTRICAL SHOCK.

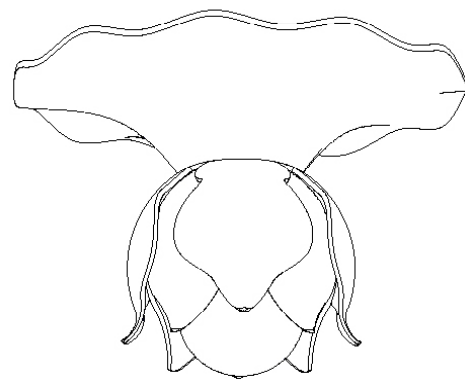

COMPONENTS PROVIDED FOR INSTALLATION

BOX 1

FIXTURE BODY	BULB	JUNCTION BOX SCREWS (X2 EACH SIZE)	WIRE NUTS (X2)



FLORA

ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2466


MOUNTING INSTRUCTIONS - TWO PERSON INSTALL

STEP 1

SHUT OFF THE MAIN ELECTRICAL SUPPLY TO THE JUNCTION BOX FROM THE FUSE BOX/CIRCUIT BREAKER. TURNING POWER OFF AT THE SWITCH IS NOT SUFFICIENT.

STEP 2

UNSCREW SCREW COLLAR FROM INSIDE FIXTURE BODY AND LIFT ELECTRICAL/MOUNTING ASSEMBLY OUT OF FIXTURE BODY.

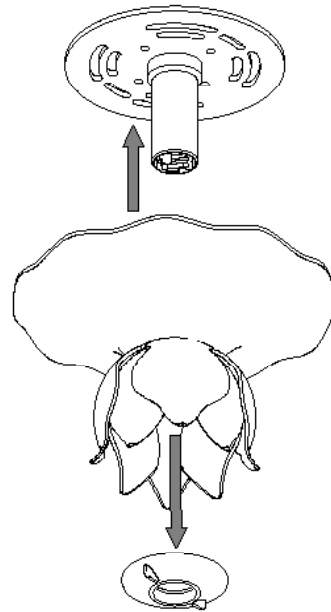

STEP 3


LIFT ELECTRICAL/MOUNTING ASSEMBLY TO CEILING

USING THE WIRE NUTS PROVIDED, MAKE ELECTRICAL CONNECTIONS BY FOLLOWING THE ELECTRICAL CONFIGURATION TABLE BELOW. ENSURE THAT ALL ELECTRICAL CONNECTIONS ARE WRAPPED WITH UL-LISTED ELECTRICAL TAPE.

IMPORTANT: NEVER ALLOW FIXTURE TO “HANG” FROM ELECTRICAL CONNECTIONS OR TO OTHERWISE PUT PRESSURE ON THE CONNECTIONS. THE WEIGHT OF THE FIXTURE SHOULD BE SUPPORTED BY THE MOUNTING ASSEMBLY.

STEP 4

ATTACH TO JUNCTION BOX WITH APPROPRIATE SIZED JUNCTION BOX SCREWS.

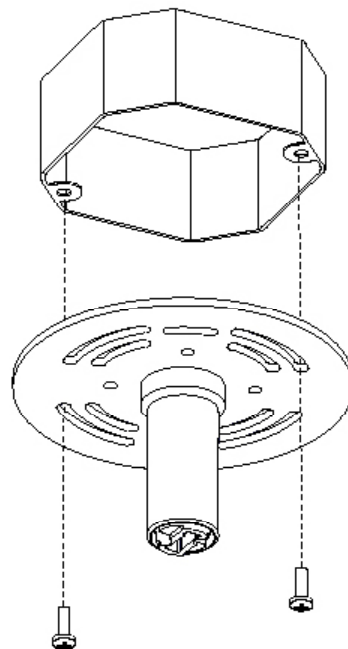




FLORA

ASSEMBLY AND MOUNTING INSTRUCTIONS


UE-2466

STEP 5
REATTACH FIXTURE BODY TO ELECTRICAL WITH SCREW
COLLAR.

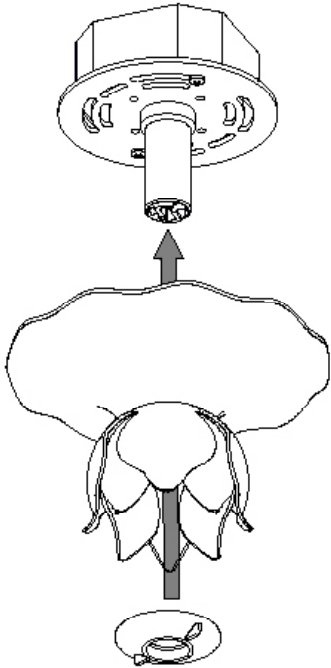

STEP 6
INSTALL BULB AND RESTORE POWER TO THE CIRCUIT.
CONFIRM PROPER OPERATION OF THE LIGHT FIXTURE.

*** IF YOU WISH TO MANIPULATE PETALS AROUND BULB, BEGIN BY ADJUSTING INNER PETALS FIRST, THEN PROCEED TO OUTER PETALS. ONLY HANDLE BY HAND AND ALWAYS WEAR GLOVES ***

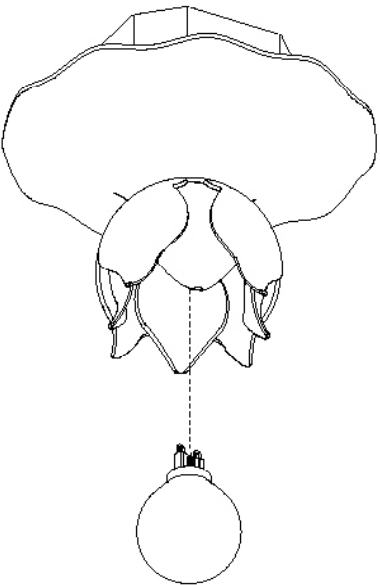

ELECTRICAL CONFIGURATION TABLE

FROM HOME	FROM LUMINAIRE
CONNECT BLACK OR RED (HOT) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE ROUND/BLACK WIRE (HOT)
CONNECT WHITE (NEUTRAL) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE RIBBED/WHITE WIRE (NEUTRAL)
CONNECT GREEN INSULATED OR BARE COPPER (GROUND -) HOUSE SUPPLY CIRCUIT WIRE AND LUMINAIRE BARE STRANDED WIRE (GROUND -) TO GREEN GROUND SCREW ON CROSSBAR.	

GENERAL NOTE: USE UL LISTED WIRE NUTS FOR THE WIRING CONNECTIONS IN THIS LUMINAIRE. WRAP WIRE NUT CONNECTIONS WITH UL LISTED ELECTRICAL TAPE.

FOR QUESTIONS, PLEASE CONTACT CLIENT SERVICES AT: 843.723.8140 OR
INFO@URBANELECTRICCO.COM