



GRAYFOY

ASSEMBLY AND MOUNTING INSTRUCTIONS

SG-1205HR

GENERAL NOTES


- THIS LUMINAIRE IS SUITED FOR DAMP LOCATIONS.
- THIS LUMINAIRE IS UL LISTED. WHEN INSTALLING LUMINAIRE, CONFORM TO ALL APPLICABLE LOCAL ELECTRICAL CODES, ORDINANCES, AND THE NATIONAL ELECTRICAL CODE (NEC).
- FOR YOUR SAFETY AND PROPER OPERATION OF LUMINAIRE, READ AND UNDERSTAND ALL INSTRUCTIONS COMPLETELY BEFORE COMMENCING INSTALLATION OF THIS LUMINAIRE.
- CAREFULLY UNPACK THE LUMINAIRE AND INSPECT FOR DAMAGE.
- THIS PRODUCT IS RATED FOR ONE 60W MAX, TYPE A BULBS.
- SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

CAUTION





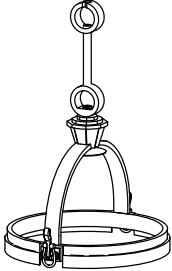


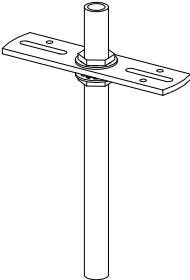




- THIS PRODUCT SHOULD BE INSTALLED ONLY BY A LICENSED ELECTRICIAN.
- THIS FIXTURE WEIGHS APPROXIMATELY 39 LBS.

WARNING

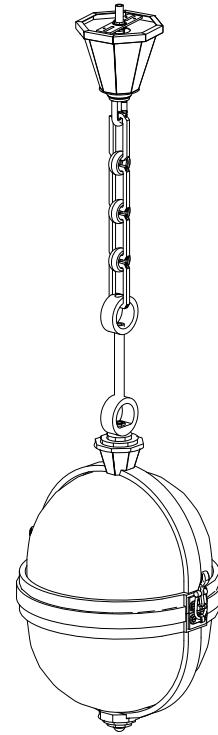THE ELECTRICITY MUST BE TURNED OFF AT THE MAIN FUSE BOX BEFORE INSTALLING THIS LUMINAIRE. TURNING POWER OFF USING THE LIGHT SWITCH MAY NOT BE SUFFICIENT TO PREVENT ELECTRICAL SHOCK.



COMPONENTS PROVIDED FOR INSTALLATION

BULB	ELECTRICAL CLUSTER	WIRE NUTS (2X)	GLASS (2X)	UPPER FIXTURE BODY	LOWER FIXTURE BODY
					
LOOP & SCREW COLLAR	CROSSBAR ASSEMBLY	CANOPY	CHAIN	HEX WRENCH	REMOVABLE LINK
					



GRAYFOY ASSEMBLY AND MOUNTING INSTRUCTIONS

SG-1205HR


MOUNTING INSTRUCTIONS – 2 PERSON INSTALLATION

STEP 1

SHUT OFF THE MAIN ELECTRICAL SUPPLY TO THE JUNCTION BOX FROM THE FUSE BOX/CIRCUIT BREAKER. TURNING POWER OFF AT THE SWITCH IS NOT SUFFICIENT.


STEP 2

GUIDE THE WIRING THROUGH THE GLASS AND UPPER FIXTURE BODY. ATTACH THE ELECTRICAL ASSEMBLY TO THE UPPER FIXTURE BODY.

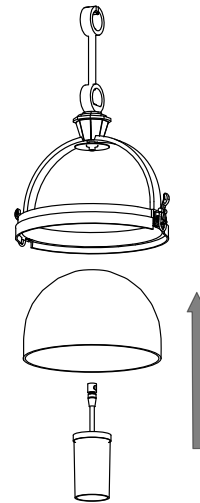


STEP 3

ATTACH THE CHAIN TO THE LOOP ON TOP OF THE UPPER BODY FIXTURE.

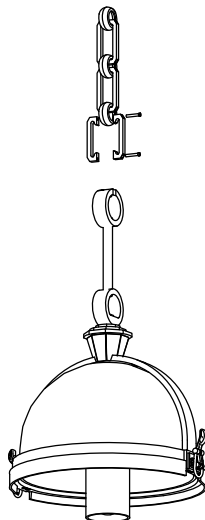

STEP 4

ATTACH THE REMOVABLE LINK TO THE CHAIN.

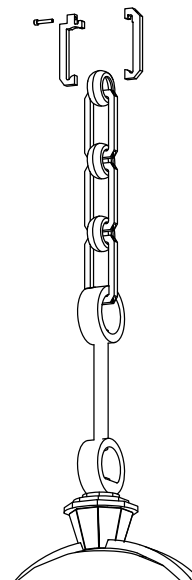




GRAYFOY ASSEMBLY AND MOUNTING INSTRUCTIONS

SG-1205HR


STEP 5

GUIDE THE WIRING THROUGH THE SCREW COLLAR, LOOP, AND CANOPY. ATTACH THE LOOP TO THE CHAIN. ATTACH THE CROSSBAR ASSEMBLY TO THE LOOP.

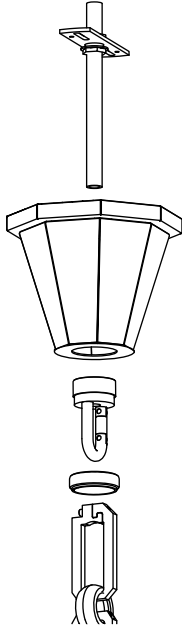

STEP 6

RAISE THE ASSEMBLED FIXTURE UP TOWARDS THE CEILING. USING SCREWS FROM THE JUNCTION BOX ATTACH THE CROSSBAR ASSEMBLY TO THE JUNCTION BOX.

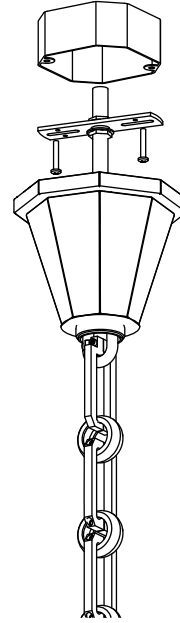

STEP 7

USING THE WIRE NUTS, MAKE ELECTRICAL CONNECTIONS BY FOLLOWING THE ELECTRICAL CONFIGURATION TABLE BELOW. ENSURE THAT ALL ELECTRICAL CONNECTIONS ARE WRAPPED WITH UL-LISTED ELECTRICAL TAPE.

STEP 8


SLIP THE CANOPY AGAINST THE CEILING USING THE SCREW COLLAR TO SECURE THE CANOPY IN PLACE.

STEP 9

INSTALL THE BULBS IN THE FIXTURE AND RESTORE POWER TO THE CIRCUIT. CONFIRM PROPER OPERATION OF THE LIGHT FIXTURE.

STEP 10

INSTALL GLASS INTO THE LOWER FIXTURE BODY USING THE BRASS SPIN AND BRASS CAP TO SECURE IN PLACE.

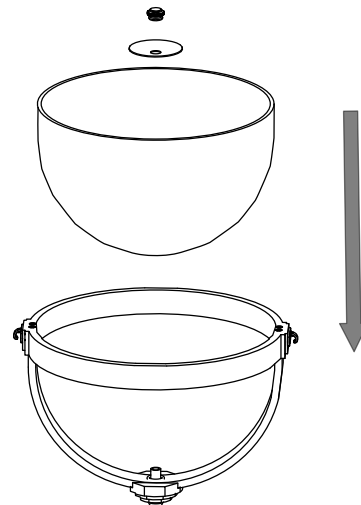




GRAYFOY ASSEMBLY AND MOUNTING INSTRUCTIONS

SG-1205HR

STEP 11

LIFT THE ASSEMBLED LOWER FIXTURE BODY UP TOWARDS THE FIXTURE ATTACH THE LOWER FIXTURE BODY TO THE UPPER FIXTURE BODY.

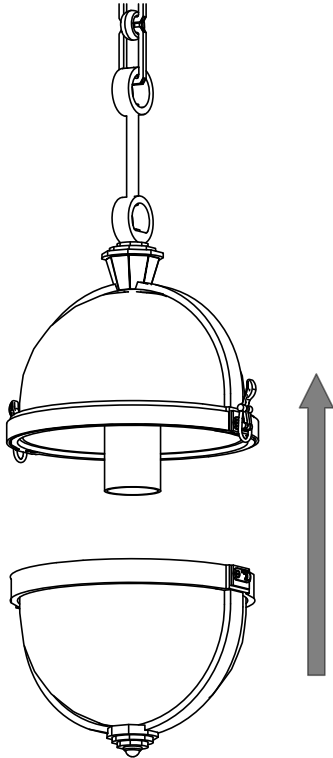

ELECTRICAL CONFIGURATION TABLE

FROM HOME	FROM LUMINAIRE
CONNECT BLACK OR RED (HOT) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE ROUND/BLACK WIRE (HOT)
CONNECT WHITE (NEUTRAL) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE RIBBED/WHITE WIRE (NEUTRAL)
CONNECT GREEN INSULATED OR BARE COPPER (GROUND -) HOUSE SUPPLY CIRCUIT WIRE TO LUMINAIRE BARE STRANDED WIRE (GROUND -).	

GENERAL NOTE: USE UL LISTED WIRE NUTS FOR THE WIRING CONNECTIONS IN THIS LUMINAIRE. WRAP WIRE NUT CONNECTIONS WITH UL LISTED ELECTRICAL TAPE.

FOR QUESTIONS, PLEASE CONTACT CLIENT SERVICES AT:
843.723.8140 OR INFO@URBANELECTRICCO.COM