



EDWARDS. HR

ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2512HR

GENERAL NOTES

- CAREFULLY UNPACK THE LUMINAIRE AND INSPECT FOR DAMAGE.
- PLEASE WEAR GLOVES TO PROTECT THE FINISH OF THE FIXTURE.
- SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

NOTICE


- FOR YOUR SAFETY AND PROPER OPERATION OF LUMINAIRE, READ AND UNDERSTAND ALL INSTRUCTIONS COMPLETELY BEFORE COMMENCING INSTALLATION OF THIS LUMINAIRE.
- THIS LUMINAIRE IS SUITED FOR DAMP LOCATIONS.
- THIS LUMINAIRE IS UL LISTED. WHEN INSTALLING LUMINAIRE, CONFORM TO ALL APPLICABLE LOCAL ELECTRICAL CODES, ORDINANCES, AND THE NATIONAL ELECTRICAL CODE (NEC).
- THIS PRODUCT IS RATED FOR TWO 60W TYPE A BULBS

CAUTION

THIS PRODUCT SHOULD BE INSTALLED ONLY BY A LICENSED ELECTRICIAN.









WARNING

THE ELECTRICITY MUST BE TURNED OFF AT THE MAIN FUSE BOX BEFORE INSTALLING THIS LUMINAIRE. TURNING POWER OFF USING THE LIGHT SWITCH MAY NOT BE SUFFICIENT TO PREVENT ELECTRICAL SHOCK.


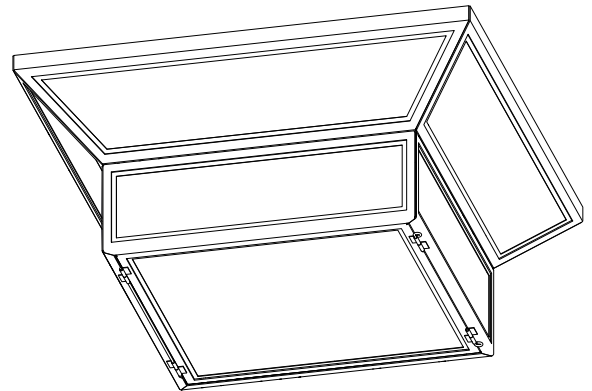


COMPONENTS PROVIDED FOR INSTALLATION

BOX 1

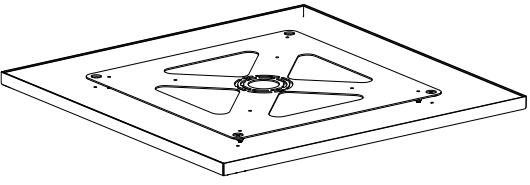FIXTURE BODY 		MOUNTING ASSEMBLY 			
ELECTRICAL 		DOOR GLASS PAN 	PAN HEAD SCREW (X8) 	STANDOFF (X4) 	
HEX NUT 	WASHER 	GROUND WIRE 	TOGGLE BOLTS AND WASHERS (X4) 	JUNCTION BOX SCREWS (X2) 	WIRE NUT (X2) 

BOX 2

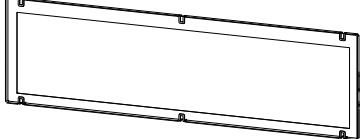RECTANGLE GLASS PAN (X4) 
TRAPAZOID GLASS PAN (X4) 




EDWARDS. HR


ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2512HR

BOX 3

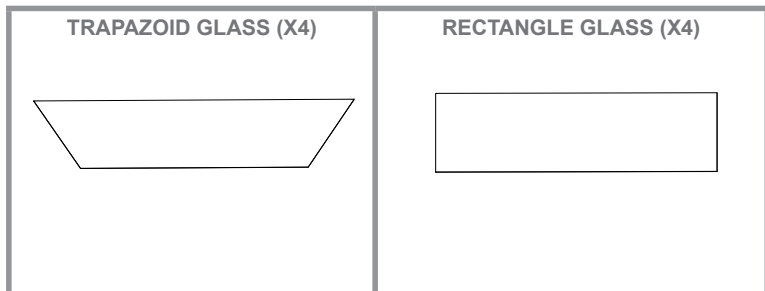


BOX 4

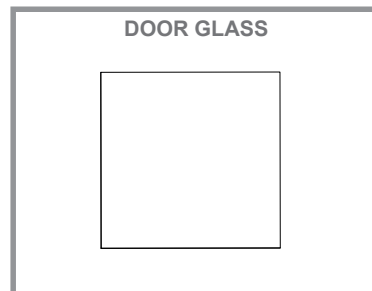

GLASS INSTALL INSTRUCTIONS

STEP 1


INSTALL GLASS INTO GLASS PANS AND FOLD DOWN TABS TO HOLD IN PLACE

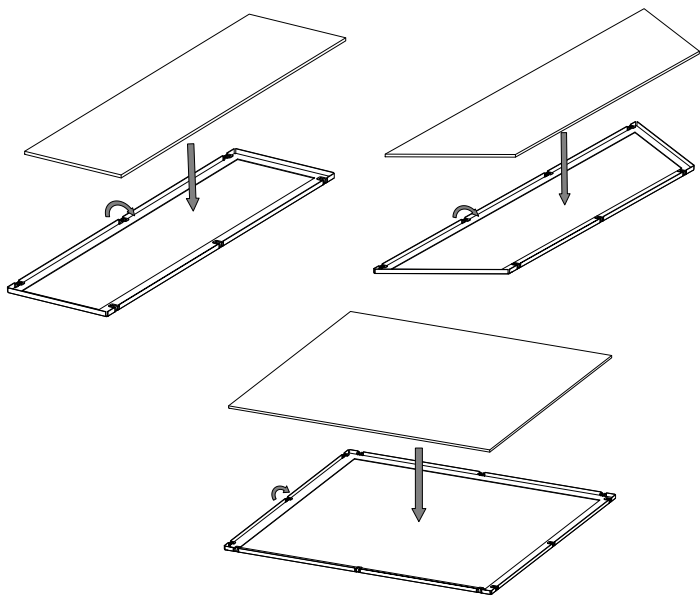

STEP 2


INSTALL RECTANGLE GLASS PANS IN FIXTURE BODY AND FOLD FIXTURE TABS OVER TO HOLD IN PLACE.

NOTE: PAN TABS TO FACE INSIDE FIXTURE BODY

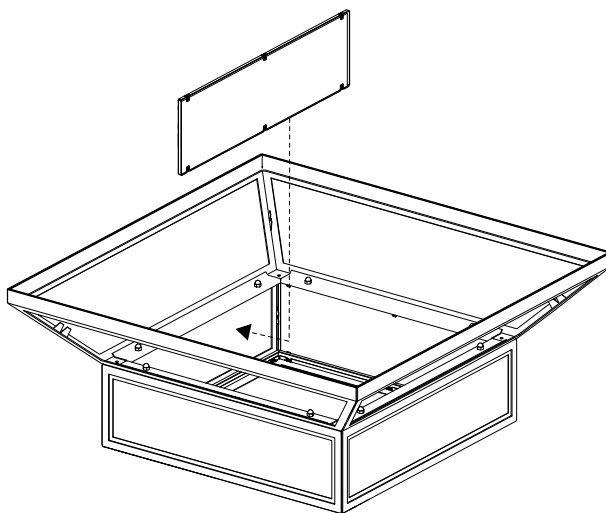


STEP 3

INSTALL TRAPAZOID GLASS PANS INTO FIXTURE BODY. FOLD TABS OVER TO HOLD IN PLACE

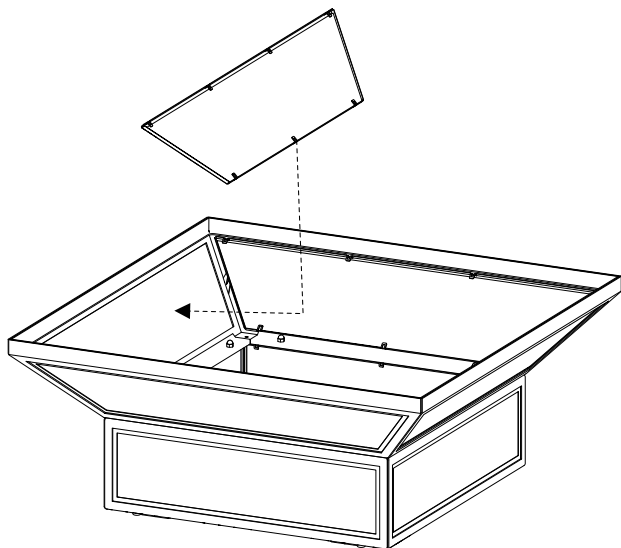

STEP 4

REMOVE THE TWO LOOP DOOR PINS TO OPEN DOOR. INSTALL DOOR GLASS PAN INTO FIXTURE BODY. FOLD TABS OVER TO HOLD IN PLACE

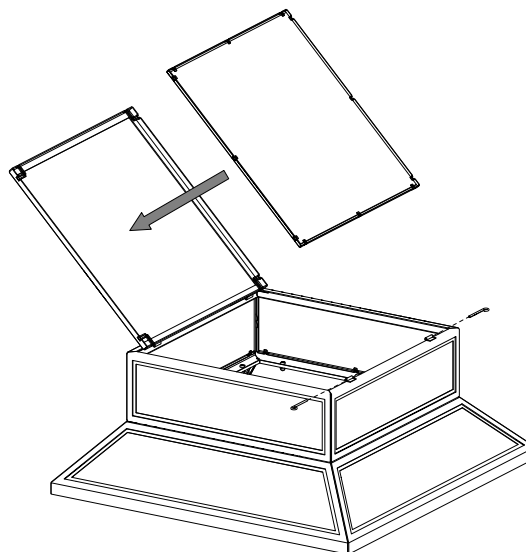



EDWARDS. HR

ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2512HR


MOUNTING INSTRUCTIONS - 2 PERSON INSTALL

STEP 1

SHUT OFF THE MAIN ELECTRICAL SUPPLY TO THE JUNCTION BOX FROM THE FUSE BOX/CIRCUIT BREAKER. TURNING POWER OFF AT THE SWITCH IS NOT SUFFICIENT.


STEP 2

DETACH STEEL MOUNTING PLATE FROM MOUNTING ASSEMBLY BY UNSCREWING FOUR ACORN NUTS.

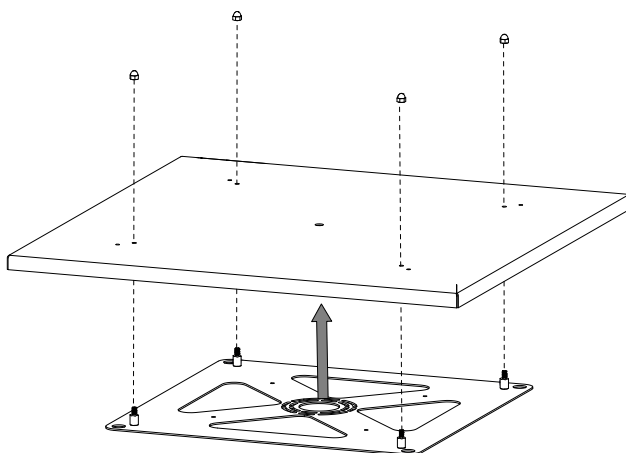

STEP 3


ATTACH MOUNTING PLATE TO JUNCTION BOX WITH JUNCTION BOX SCREWS.

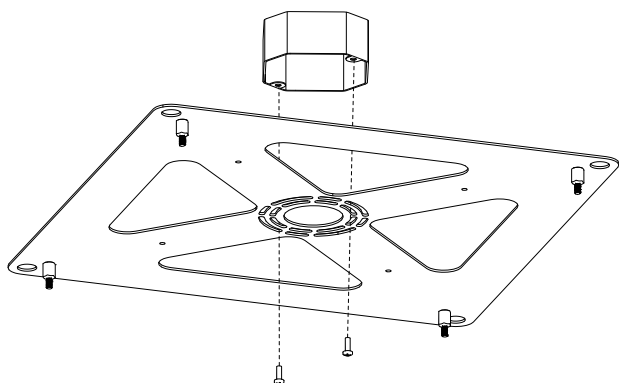

STEP 4

MARK HOLES FOR TOGGLE BOLTS AND DRILL.

INSTALL TOGGLE BOLTS AND WASHERS.

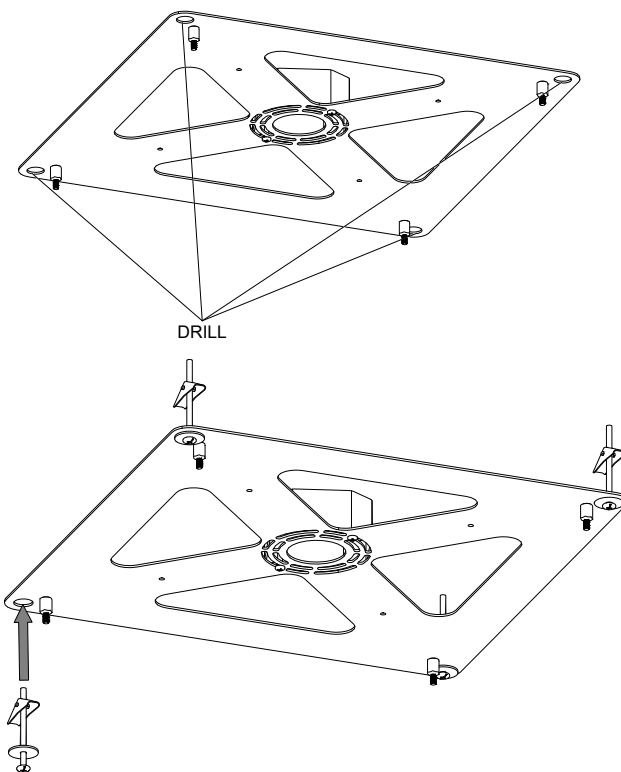



EDWARDS. HR


ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2512HR

STEP 5

ATTACH ELECTRICAL ASSEMBLY AND GROUND WIRE TO CENTER HOLE OF CANOPY PAN WITH WASHER AND HEX NUT.

ATTACH STANDOFFS TO CANOPY WITH 4 PAN HEAD SCREWS.

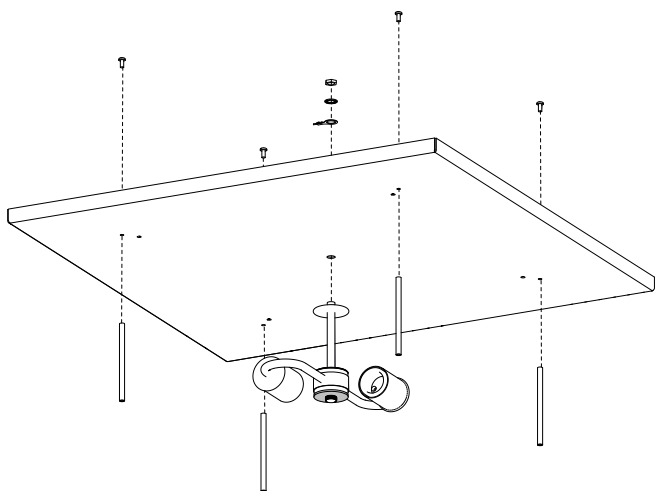


STEP 6

LIFT PAN TO CEILING. USING THE WIRE NUTS PROVIDED, MAKE ELECTRICAL CONNECTIONS BY FOLLOWING THE ELECTRICAL CONFIGURATION TABLE BELOW. ENSURE THAT ALL ELECTRICAL CONNECTIONS ARE WRAPPED WITH UL-LISTED ELECTRICAL TAPE.


IMPORTANT: NEVER ALLOW FIXTURE TO "HANG" FROM ELECTRICAL CONNECTIONS OR TO OTHERWISE PUT PRESSURE ON THE CONNECTIONS. THE WEIGHT OF THE FIXTURE SHOULD BE SUPPORTED BY THE MOUNTING ASSEMBLY.

ATTACH CANOPY PAN TO MOUNTING PLATE WITH ACORN NUTS.

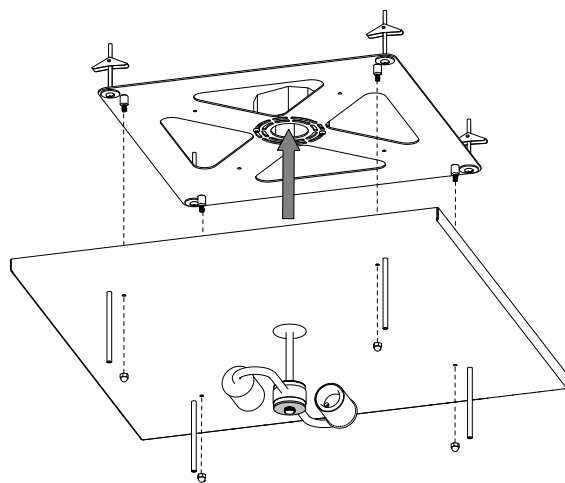


STEP 7

ATTACH FIXTURE BODY TO STANDOFFS ON MOUNTING ASSEMBLY WITH 4 REMAINING PAN HEAD SCREWS.

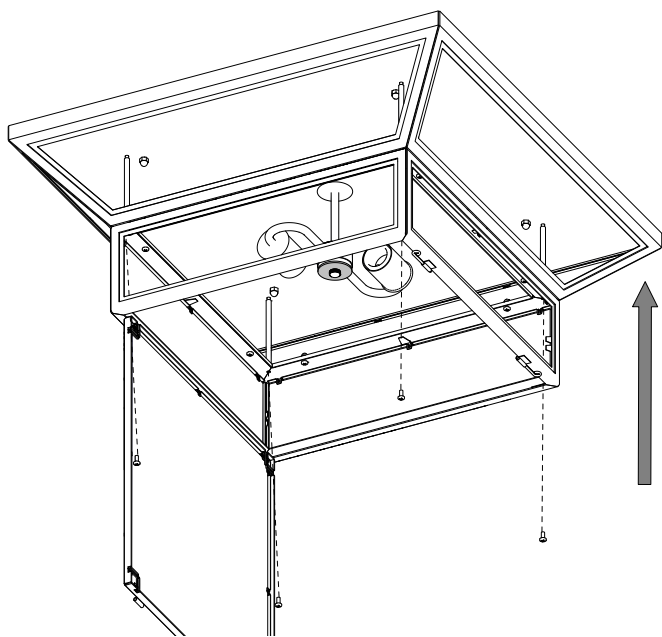

STEP 8

INSTALLS BULBS. CLOSE DOOR WITH LOOP PINS. RETURN POWER TO CIRCUIT. CONFIRM PROPER OPERATION OF FIXTURE.

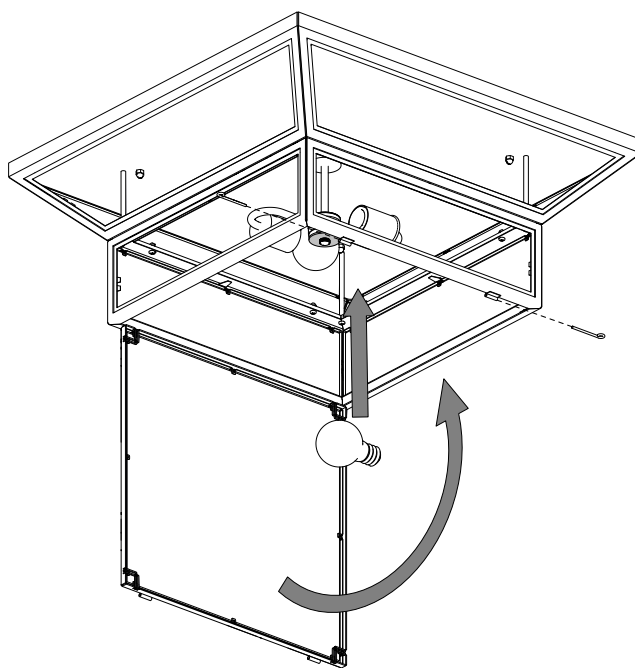



EDWARDS. HR

ASSEMBLY AND MOUNTING INSTRUCTIONS

UE-2512HR

ELECTRICAL CONFIGURATION TABLE

FROM HOME	FROM LUMINAIRE
CONNECT BLACK OR RED (HOT) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE ROUND/BLACK WIRE (HOT)
CONNECT WHITE (NEUTRAL) HOUSE SUPPLY CIRCUIT WIRE TO:	LUMINAIRE RIBBED/WHITE WIRE (NEUTRAL)
CONNECT GREEN INSULATED OR BARE COPPER (GROUND -) HOUSE SUPPLY CIRCUIT WIRE AND LUMINAIRE BARE STRANDED WIRE (GROUND -) TO GREEN GROUND SCREW ON CROSSBAR.	

GENERAL NOTE: USE UL LISTED WIRE NUTS FOR THE WIRING CONNECTIONS IN THIS LUMINAIRE. WRAP WIRE NUT CONNECTIONS WITH UL LISTED ELECTRICAL TAPE.

FOR QUESTIONS, PLEASE CONTACT CLIENT SERVICES AT: 843.723.8140 OR
INFO@URBANELECTRICCO.COM